




# ONE SYSTEM WITH 200 SOLUTIONS

USE THE SAME BATTERIES AND CHARGERS WITH ALL 36V AND 18V LXT® TOOLS



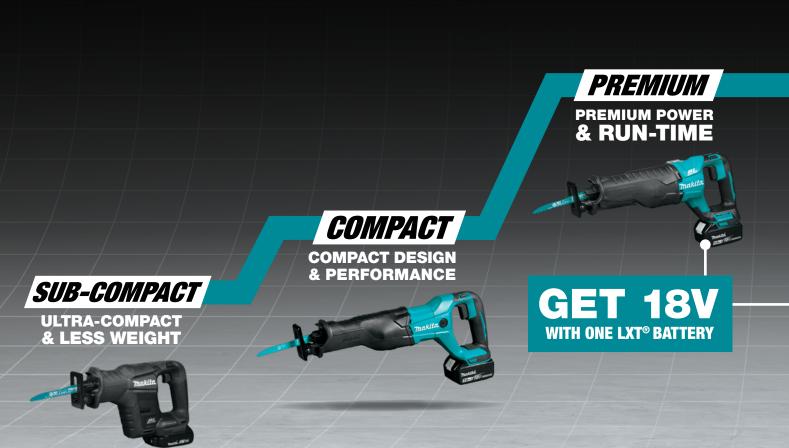

LXT® BATTERY

TO 50% MORE RUN TIME

Battery delivers constant power and run time in extreme temperatures, even in winter (-4°F/ -20°C). Equipped with Star Protection Computer Controls™ to protect against overload, over-discharge, and overheating.



LXT® RAPID OPTIMUM CHARGER

TO **3X** FASTER CHARGING

The Makita Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimize battery life by actively controlling current, voltage and temperature.





## THE ZXT ADVANTAGE



PURPOSE-BUILT BRUSHLESS MOTOR

50% LONGER MOTOR LIFE

Makita-built Brushless Motor eliminates carbon brushes, enabling the motor to run cooler and more efficiently for longer life.



STAR PROTECTION COMPUTER CONTROLS™

### **EFFICIENT POWER MANAGEMENT**

CONNECT WITH BLUETOOTH® \* Bluetooth



## **WIRELESS DUST MANAGEMENT**

FOR MULTIPLE APPLICATIONS

AWS<sup>™</sup> uses Bluetooth<sup>®</sup> technology for wireless power-on and power-off communication between the equipped tool and dust extractor. Once connected via AWS<sup>™</sup>, your dust extractor will automatically power on or off when your cordless tool starts or stops, running only when your cordless tool is in use.

## ELIMINATES CORDS

Using our cordless LXT® dust extractor with a cordless LXT® tool means no more grounding issues, no re-plugging the cord, and reduced trip hazards.

## INCREASES PRODUCTIVITY & CONVENIENCE

Intelligent Bluetooth® communication using dust extractor only while tool is in use extends battery run time of the dust extractor, increasing productivity on a single charge.

## REDUCES EXCESSIVE NOISE

The AWS™ dust extractor / vacuum runs only while the AWS™ power tool is in use, reducing continuous noise at the job or work site.



### MOST COMPACT, LIGHTEST WEIGHT, 18V COMPATIBILITY WITH BIG PERFORMANCE

Makita® created a new class in cordless with 18V LXT® Sub-Compact Brushless tools. Makita® Sub-Compact tools are the most compact and lightest weight in the 18V category, so users get 12V handling with 18V compatibility. Sub-Compact tools use the same 18V batteries and chargers that work with over 200 solutions in the LXT® system.



































AWS™ / LXT® SUB-COMPACT | 5



#### 15-PIECE KIT





XT1501

18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Impact Driver (XDT11Z)

18V LXT® Recipro Saw (XRJ04Z)

18V LXT® 6-1/2" Circular Saw (XSS02Z)

18V LXT® Brushless 4-1/2" Cut-Off/Angle Grinder (XAG03Z)

18V LXT® 1/2" Impact Wrench (XWT04Z)

18V LXT® 1/2" Impact Wrench (XWT05Z) 18V LXT® 7/8" Rotary Hammer (XRH04Z)

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z)

18V LXT® 3/8" Angle Drill (XAD01Z)

18V LXT® L.E.D. Lantern/Flashlight (DML806) 18V LXT® Xenon Flashlight (DML185)

18V LXT® Xenon Flashlight (DML185) 18V LXT® Blower (DUB182Z) 18V LXT® Job Site Radio (XRM05)

18V LXT® 5-3/8" Metal Cutting Saw (XSC01Z)

(4) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B)

(2) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

#### 7-PIECE KITS







#### <u>LXT</u>.BRUSHLESS

#### XT705PT

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z)

18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Brushless Recipro Saw (XRJ05Z)

18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z)

18V LXT® Brushless 4-1/2" / 5" Cut-Off/Angle Grinder (XAG04Z)

18V LXT® / 12V max CXT® Bluetooth® Job Site Radio (XRM06B)

18V LXT® L.E.D. Flashlight (DML802)

(2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B)

18V LXT® Lithium-Ion Dual Port Charger (DC18RD)

#### <u>LXT</u>,



18V LXT® 1/2" Hammer Driver-Drill (XPH10Z)

18V LXT® Impact Driver (XDT11Z) 18V LXT® 6-1/2" Circular Saw (XSS02Z)

18V LXT® Recipro Saw (XRJ04Z)

18V LXT® Brushless 4-1/2" / 5" Cut-Off/Angle Grinder (XAG04Z)

18V LXT® Blower (DUB182Z)

18V LXT® Xenon Flashlight (DML185)

(2) 18V LXT® Lithium-lon 3.0Ah Battery (BL1830B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

### <u>LXT</u>.



18V LXT® 1/2" Hammer Driver-Drill (XPH10Z)

18V LXT® Impact Driver (XDT11Z) 18V LXT® 6-1/2" Circular Saw (XSS02Z)

18V LXT® Recipro Saw (XRJ04Z)

18V LXT® Brushless 4-1/2" Cut-Off/Angle Grinder (XAG03Z)

18V LXT® Job Site Radio (XRM05)

18V LXT® L.E.D. Flashlight (DML802)

(2) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC) 3.0

6

#### **6-PIECE KITS**

#### LXT BRUSHLESS

#### XT611PT

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Brushless Recipro Saw (XRJ05Z) 18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z) 18V LXT® Brushless 4-1/2" / 5" Cut-Off/Angle Grinder (XAG04Z) 18V LXT® L.E.D. Flashlight (DML802)

(2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Dual Port Charger (DC18RD)

LXT BRUSHLESS

#### XT612M

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z) 18V LXT® Brushless Impact Driver (XDT13Z) 18V LXT® Brushless Recipro Saw (XRJ05Z) 18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z) 18V LXT® Brushless 4-1/2" / 5" Cut-Off/Angle Grinder (XAG04Z) (2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B) 18V LXT® Xenon Flashlight (DML185) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### XT610

18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Impact Driver (XDT11Z) 18V LXT® 6-1/2" Circular Saw (XSS02Z) 18V LXT® Recipro Saw (XRJ04Z)

18V LXT® Brushless 4-1/2" Cut-Off/Angle Grinder (XAG03Z) 18V LXT® Xenon Flashlight (DML185)

(2) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

#### **5-PIECE KIT**



#### XT505

18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Impact Driver (XDT11Z) 18V LXT® Recipro Saw (XRJ04Z) 18V LXT® 6-1/2" Circular Saw (XSS02Z) 18V LXT® Xenon Flashlight (DML185)

(2) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

#### 4-PIECE KITS



#### <u>LXT</u> BRUSHLESS

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Brushless 4-1/2" / 5" Cut-Off/Angle Grinder (XAG04Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

#### <u>LXT</u> BRUSHLESS

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Brushless Recipro Saw (XRJ05Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### <u>LXT</u> BRUSHLESS

#### XT449T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### <u>LXT</u> BRUSHLESS

#### XT448T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless Recipro Saw (XRJ05Z) 18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS

#### XT447T

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z) 18V LXT® Brushless Impact Driver (XDT13Z) 18V LXT® Brushless Recipro Saw (XRJ05Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-lon 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS

XT446T

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z) 18V LXT® Brushless Impact Driver (XDT13Z) 18V LXT® Brushless 6-1/2" Circular Saw (XSH03Z) 18V LXT® L.E.D. Flashlight (DML802) (2) 18V LXT® Lithium-lon 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



XT442 18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Recipro Saw (XRJ04Z) 18V LXT® 6-1/2" Circular Saw (XSS02Z) 18V LXT® Xenon Flashlight (DML185) (2) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



XT440

18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Impact Driver (XDT11Z) 18V LXT® Recipro Saw (XRJ04Z) 18V LXT® Xenon Flashlight (DML185) (2) 18V LXT® Lithium-Ion 3.0Ah Battery (BL1830B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

## Makita



#### LXT BRUSHLESS

#### XT331PT

18V X2 (36V) LXT® Brushless Blower (XBU02Z) 18V X2 (36V) LXT® Brushless String Trimmer (XRU09Z) 18V X2 (36V) LXT® Brushless 14" Chain Saw (XCU03Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Dual Port Charger (DC18RD)



#### LXT BRUSHLESS

#### XT330T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH072) 18V LXT® Brushless 3-Speed Impact Driver (XDT142) 18V LXT® Brushless Recipro Saw (XRJ052) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### <u>LXT</u> BRUSHLESS

#### KEN XT336T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) 18V LXT® Sub-Compact Brushless Recipro Saw (XRJ07Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### XT337T

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z) 18V LXT® Brushless Impact Driver (XDT132) 18V LXT® Sub-Compact Brushless Recipro Saw (XRJ07Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### XT328M

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z)
18V LXT® Brushless Impact Driver (XDT13Z)
18V LXT® Brushless Recipro Saw (XRJ05Z)
(2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B)
18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT, COMPACT

#### **CT320R**

18V LXT® 1/2" Driver-Drill (XFD01Z)

18V LXT® Impact Driver (XDT11Z)

18V LXT® Xenon Flashlight (DML185)

2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### CX303TRB

18V LXT® Sub-Compact Brushless 11/16" Rotary Hammer (XRH06ZB)
18V LXT® Sub-Compact Brushless Impact Driver (XDT15ZB)
18V LXT® Sub-Compact Brushless Recipro Saw (XRJ07ZB)
18V LXT® Lithium-Compact 2.OAh Battery (BL1820B)
18V LXT® Lithium-Ion 5.OAh Battery (BL1850B)
18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### 2

#### CX300RB

18V LXT® Sub-Compact Brushless 1/2° Driver-Drill (XFD11ZB) 18V LXT® Sub-Compact Brushless Impact Driver (XDT15ZB) 18V LXT® Sub-Compact Brushless Recipro Saw (XRJ07ZB) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### CX301RB

18V LXT® Sub-Compact Brushless 1/2" Driver-Drill (XFD11ZB)
18V LXT® Sub-Compact Brushless Impact Driver (XDT15ZB)
18V LXT® -12V max CXT® Bluetooth® Job Site Radio (XRM06B)
2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B)
18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### XT277PT

18V X2 (36V) LXT® Brushless Blower (XBU02Z)
18V X2 (36V) LXT® Brushless String Trimmer (XRU09Z)
(2) 18V LXT® Lithium-lon 5.0Ah Battery (BL1850B)
18V LXT® Lithium-lon Dual Port Charoer (DC18RD)



#### XT276PT

18V X2 (36V) LXT® Brushless Blower (XBU02Z) 18V X2 (36V) LXT® Brushless 14" Chain Saw (XCU03Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Dual Port Charger (DC18RD)



### LXT BRUSHLESS

#### XT275PT

18V LXT® Compact Brushless 1/2® Hammer Driver-Drill (XPH12Z)
18V LXT® Brushless 3-Speed Impact Driver (XDT14Z)
(2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B)
18V LXT® Lithium-Ion Dual Port Charger (DC18RD)



#### LXT BRUSHLESS

#### XT269M

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z)
18V LXT® Brushless Impact Driver (XDT13Z)
(2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B)
18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

Z<sub>=</sub>U; BATTER

#### XT269R

18V LXT® Compact Brushless 1/2" Hammer Driver-Drill (XPH12Z) 18V LXT® Brushless Impact Driver (XDT13Z) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battlery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)

#### 2-PIECE KITS



#### LXT BRUSHLESS

#### XT268T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless 3-Speed Impact Driver (XDT14Z) (2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS

#### XT267T

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless Impact Driver (XDT13Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### <u>LXT</u> <u>X2 18v + 18v 36v</u>

#### WM XT274PT

18V X2 (36V) LXT® Brushless Blower (XBU02Z) 18V X2 (36V) LXT® 12" Chain Saw (XCU02Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Dual Port Charger (DC18RD)



#### <u>LXT</u> BRUSHLESS

#### XT267M

18V LXT® Brushless 1/2" Hammer Driver-Drill (XPH07Z) 18V LXT® Brushless Impact Driver (XDT13Z) (2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT

#### XT263M

18V LXT® 1/2" Hammer Driver Drill (XPH03Z) 18V LXT® Impact Driver (XDT11Z) (2) 18V LXT® Lithium-lon 4.0Ah Battery (BL1840B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT

#### XT261M

18V LXT® 1/2" Hammer Driver-Drill (XPH10Z) 18V LXT® Impact Driver (XDT11Z) (2) 18V LXT® Lithium-Ion 4.0Ah Battery (BL1840B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS

#### CX202RB

18V LXT® Sub-Compact Brushless 1/2" Hammer Driver-Drill (XPH11ZB) 18V LXT® Sub-Compact Brushless Impact Driver (XDT15ZB) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS

#### CX200RB

18V LXT® Sub-Compact Brushless 1/2" Driver-Drill (XFD11ZB) 18V LXT® Sub-Compact Brushless Impact Driver (XDT15ZB) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT BRUSHLESS

#### CX201RB

18V LXT® Sub-Compact Brushless 1/2" Driver-Drill (XFD11ZB) 18V LXT® Sub-Compact Brushless 3/8" Impact Wrench (XWT12ZB) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### <u>LXT, compagi</u>

#### CT225R

18V LXT® Cordless 1/2" Driver-Drill (XFD10Z)

18V LXT® Impact Driver (XDT11Z) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



### LXT BRUSHLESS



#### XT262T

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z) 18V LXT® Impact Driver (XDT11Z) (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT COMPAGE

XT262R

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z) 18V LXT® Impact Driver (XDT11Z)

(2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT XT255T

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z) 18V LXT® Cut-Out Tool (XOCO1Z)

(2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### LXT. COMPAGI

#### XT255R

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z) 18V LXT® Cut-Out Tool (XOCO1Z) (2) 18V LXT® Lithium-Ion Compact 2.0Ah Battery (BL1820B)

18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC)



#### XT255TX2

18V LXT® Brushless 4,000 RPM Drywall Screwdriver (XSF03Z) 18V LXT® Cut-Out Tool (XOCO1Z)

(2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B) 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC) Collated Autofeed Screwdriver Magazine (199145-0)





XPH07TB

18V LXT® Brushless 1/2" Hammer

**Driver-Drill Kit** 

Canacities: Steel (1/2"), Wood )3"), Masonry (5/8") No Load Speed (var. 2 spd) 0 - 550 / 0 - 2,100 RPM Blows Per Minute (2 speed) 0 - 8,250 / 0 - 31,500 BPM Maximum Torque (in.lbs./N•m) 1,090 in.lbs./125N•m 18V LXT® Lithium-Ion



**POWER** BL™ Brushless Motor delivers 1,090 in.lbs. of Max Torque



XPH07MB

18V LXT® Brushless 1/2" Hammer **Driver-Drill Kit** 

Capacities: Steel (1/2"), Wood (3"), Masonry (5/8") No Load Speed (var. 2 spd) 0 - 550 / 0 - 2,100 RPM Blows Per Minute (2 speed) 0 - 8,250 / 0 - 31,500 BPM Maximum Torque (in.lbs./N•m) 1,090 in.lbs./125N•m 18V LXT® Lithium-Ion



XPH03MB 18V LXT® 1/2" Hammer Driver-Drill Kit

Steel (1/2"), Wood (3"), Masonry (5/8") Canacities: No Load Speed (var. 2 spd) 0 - 400 / 0 - 2,000 RPM 0 - 6,000 / 0 - 30,000 BPM Blows Per Minute (2 speed) Maximum Torque (in.lbs./N•m) 750 in.lbs./84N•m 18V LXT® Lithium-Ion



LXT BRUSHLESS

XPH12T XPH12Z

#### 18V LXT® Compact Brushless 1/2" Hammer Driver-Drill Kit

Steel (1/2"), Wood (1-1/2"), Masonry (1/2") No Load Speed (var. 2 spd) 0 - 500 / 0 - 2.000 RPM 0 - 7,500 / 0 - 30,000 BPM Blows Per Minute (2 speed) Maximum Torque (in.lbs./Nom) 530 in.lbs./60N•m Battery 18V LXT® Lithium-Ion



LXT BRUSHLESS

XPH12R XPH12Z

#### 18V LXT® Compact Brushless 1/2" Hammer Driver-Drill Kit

Steel (1/2"), Wood (1-1/2"), Masonry (1/2") No Load Speed (var. 2 spd) 0 - 500 / 0 - 2.000 RPM 0 - 7,500 / 0 - 30,000 BPM Blows Per Minute (2 speed) Maximum Torque (in.lbs./Nom) 530 in.lbs./60N•m 18V LXT® Compact Lithium-Ion



XPH11RB

#### 18V LXT® Sub-Compact Brushless 1/2" Hammer Driver-Drill Kit

Steel (1/2"), Wood (1-7/16"), Masonry (1/2") No Load Speed (var. 2 spd) 0 - 500 / 0 - 1.700 RPM 0 - 7,500 / 0 - 25,500 BPM Blows Per Minute (2 speed) Maximum Torque (in.lbs./N•m) 350 in.lbs./40N•m Compact Lithium-Ion



XPH10R XPH10Z

#### 18V LXT® Compact 1/2" Hammer Driver-Drill Kit

Capacities: Steel (1/2"), Wood (1-1/2"), Masonry (1/2") No Load Speed (var. 2 spd) 0 - 600 / 0 - 1.900 RPM 0 - 9,000 / 0 - 28,500 BPM Blows Per Minute (2 speed) Maximum Torque (in.lbs./Nom) 480 in.lbs./54N•m 18V LXT® Compact Lithium-Ion



XFD07T XFD07Z

## 18V LXT® Brushless 1/2" Driver-Drill Kit

Capacities: Steel (1/2"), Wood (3") No Load Speed (var. 2 spd) 0 - 550 / 0 - 2,100 RPM Maximum Torque (in.lbs./N•m) 1,090 in.lbs./125N•m Battery 18V L XT® Lithium-Ion Overall Length 8-1/8"



XFD03M XFD03Z 18V LXT® 1/2" Driver-Drill Kit

Capacities:	Steel (1/2"), Wood (3")
No Load Speed (var. 2 spd)	0 - 400 / 0 - 2,000 RPM
Maximum Torque (in.lbs./N•m)	750 in.lbs./84N•m
Battery	18V LXT® Lithium-lor
Overall Length	8-7/8'



XFD12T XFD12Z

#### 18V LXT® Compact Brushless 1/2" Driver-Drill Kit

Steel (1/2"), Wood (1-1/2") No Load Speed (var. 2 spd) 0 - 500 / 0 - 2,000 RPM Maximum Torque (in.lbs./N•m) 530 in.lbs./60N • m Battery 18V LXT® Lithium-Ion Overall Length 6-3/4"



XFD12R 18V LXT® Compact Brushless

1/2" Driver-Drill Kit

Steel (1/2"), Wood (1-1/2") No Load Speed (var. 2 spd) 0 - 500 / 0 - 2,000 RPM Maximum Torque (in.lbs./N•m) 530 in.lbs./60N•m 18V LXT® Compact Lithium-Ion Battery Overall Length 6-3/4"



LXT BRUSHLESS

6-5/8"

XFD131 18V LXT® Brushless 1/2" Driver-Drill Kit

Capacities: Steel (1/2"), Wood (1-1/2") 0 - 500 / 0 - 1,900 RPM No Load Speed (var. 2 spd) Maximum Torque (in.lbs./N•m 440 in.lbs./50N•m Battery 18V LXT® Lithium-Ion



XFD11RB XFD11ZB

#### 18V LXT® Sub-Compact Brushless 1/2" Driver-Drill Kit

Steel (1/2"), Wood (1-7/16") No Load Speed (var. 2 spd) 0 - 500 / 0 - 1,700 RPM Maximum Torque (in.lbs./N•m) 350 in.lbs./40N•m 18V LXT<sup>®</sup> Compact Lithium-Ion Overall Length 6-3/8"



XFD11R1B XFD11ZB

#### 18V LXT® Sub-Compact Brushless 1/2" Driver-Drill Kit

Steel (1/2"), Wood (1-7/16") 0 - 500 / 0 - 1,700 RPM No Load Speed (var. 2 spd) Maximum Torque (in.lbs./N•m) 350 in.lbs./40N•m Battery 18V LXT® Compact Lithium-Ion Overall Length 6-3/8"



XFD10R

XFD10Z

XFD12Z

#### 18V LXT® Compact 1/2" Driver-Drill Kit

Capacities: Steel (1/2"), Wood (1-1/2") No Load Speed (var. 2 spd) 0 - 600 / 0 - 1,900 RPM 480 in.lbs./54N•m Maximum Torque (in.lbs./N•m) 18V LXT® Compact Lithium-Ion Battery Overall Length 7-1/4"

Overall Length





### 18V X2 LXT® (36V) Brushless 1/2" Right Angle Drill Kit

Capacities (Wood): Hole Saw (6-1/4"), Ship Auge	er Bit (2"), Self-Feed Bit (4-5/8")
No Load Speed (var. 2 spd)	0 - 350 / 1 - 1,400 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	21-1/4"
Not Weight (with bottom)	14 lbo



#### **PERFORMANCE**

Drills up to 160 2-9/16" holes per charge in 2x SPF



<u>LXT</u>

XAD02

18V LXT® 3/8" Angle Drill Kit

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 1,800 RPM
Maximum Torque (in.lbs./N•m)	121 in.lbs./14N•m
Battery	18V LXT® Lithium-Ion
Overall Length	12-3/8"



LXT

18V LXT® 3/8" Angle Drill Kit

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 1,800 RPM
Maximum Torque (in.lbs./N•m)	121 in.lbs./14N•m
Battery	18V LXT® Lithium-Ion
Overall Length	12-3/8"



#### 18V LXT® Brushless 4-Speed Impact **Driver Kit**

Battery	18V LXT® Lithium-lor
Power Type	Cordless
Hex Shank	1/4'
Speed power selection	4
No Load Speed (var. 4 spd.)	0 - 1 100 / 0 - 2 100 / 0 - 3 200 / 0 - 3 600 RPM



#### INNOVATION

Assist Mode and two Tightening Mode features help eliminate "screw cam-out" and "cross threading"



LXT BRUSHLESS

XDT16R XDT16Z

#### 18V LXT® Compact Brushless 4-Speed Impact Driver Kit

Battery	18V LXT® Lithium-Ion
Power Type	Cordless
Hex Shank	1/4"
Speed power selection	4
No Load Speed (var. 4 spd.)	- 1,100 / - 2,100 / - 3,200 / - 3,600 RPM



LXT BRUSHLESS

XDT14T

XDT14Z

#### 18V LXT® Brushless 3-Speed Impact **Driver Kit**

Hex Shank			1/4"
No Load Speed (var. 3 spd.) 0	- 1,100 / 0 -	2,100/0-	3,600 RPM
Impacts Per Minute (var. 3 spd.)	0 - 1,100 / 0	- 2,600 / 0	- 3,800 IPM
Maximum Torque (in.lbs./N•m)	)	1,550 in.lb	s./175N•m
Battery		18V LXT®	Lithium-lon



XDT13T XDT13Z

### **18V LXT® Brushless Impact Driver Kit**

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 3,400 RPM
Impacts Per Minute (variable speed)	0 - 3,600 IPM
Maximum Torque (in.lbs./N•m)	1,500 in.lbs./170N•m
Rattery	18V I XT® Lithium-lon



<u>LXT</u> BRUSHLESS

#### **XDT131** XDT13Z 18V LXT® Brushless Impact Driver Kit

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 3,400 RPM
Impacts Per Minute (variable speed)	0 - 3,600 IPM
Maximum Torque (in.lbs./N•m)	1,500 in.lbs./170N•m
Battery	18V LXT® Lithium-Ion



LXT BRUSHLESS XDT13R

## 18V LXT® Compact Brushless Impact Driver Kit

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 3,400 RPM
Impacts Per Minute (variable spe	ed) 0 - 3,600 IPM
Maximum Torque (in.lbs./N•m)	1,500 in.lbs./170N•m
Battery	18V LXT® Compact Lithium-Ion

XDT13Z



Includes 2.0

XDT15R1B

XDT15ZB

## 18V LXT® Sub-Compact Brushless Impact Driver Kit

Hex Shank	1/4"
No Load Speed (var. 2 spd)	0 - 1,300 / 0 - 3,000 RPM
Impacts Per Minute (var. 2 spd.)	0 - 1,600 / 0 - 3,900 IPM
Maximum Torque (in.lbs./N•m)	1,240 in.lbs./140N•m
Battery	18V LXT® Compact Lithium-Ion



XDT11R XDT11Z

#### **18V LXT® Compact Impact Driver Kit**

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 2,900 RPM
Impacts Per Minute (variable spe	ed) 0 - 3,500 IPM
Maximum Torque (in.lbs./N•m)	1,460 in.lbs./165N•m
Battery	18V LXT® Compact Lithium-Ion



XST01Z

#### 18V LXT® Brushless Oil-Impulse 3-Speed Impact Driver

Hex Shank	1/4"
No Load Speed (var. 3 spd.) 0 - 1,200 /	0 - 2,000 / 0 - 3,200 RPM
Impacts Per Minute (var. 3 spd.) 0 - 1,40	0 / 0 - 2,200 / 0 - 2,700 IPM
Maximum Torque (in.lbs./N•m)	355 in.lbs./40N•m
Battery	18V LXT® Lithium-Ion



LXT

Tool only, battery & charger not included

XLT01 XLT01Z

#### 18V LXT® Angle Impact Driver Kit

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 2,000 RPM
Impacts Per Minute (variable speed)	0 - 3,000 IPM
Maximum Torque (in.lbs./N•m)	530 in.lbs./60N•m
Battery	18V LXT® Lithium-Ion



Tool only

XPT02Z

#### **18V LXT® Hybrid Brushless Impact Driver**

Hex Shank	1/4"
Capacities:	teel (3/8"), Wood (13/16"), Masonry (5/16")
No Load Speed (var. 2	pd) 0 - 700 / 0 - 2,300 RPM
Blows Per Minute (2 s	eed) 0 - 8,400 / 0 - 32,400 BPM
No Load Speed (var. 3	pd.) 0 - 1,300 / 0 - 2,200 / 0 - 2,700 RPM





LXT BRUSHLESS

XWT07Z XWT07T

#### 18V LXT® Brushless 3/4" Impact Wrench Kit

Square Drive No Load Speed (var. 3 spd.) 0 - 900 / 0 - 1,000 / 0 - 1,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,000 / 0 - 2,200 IPM Maximum Torque (ft.lbs./N•m) 780 ft.lbs./1,057 N•m 18V LXT® Lithium-Ion



**T80TWX** 

#### 18V LXT® Brushless 1/2" Impact Wrench Kit

Square Drive No Load Speed (var. 3 spd.) 0 - 900 / 0 - 1,000 / 0 - 1,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,000 / 0 - 2,200 IPM Maximum Torque (ft.lbs./N•m) 18V LXT® Lithium-lon



XWT04TX

#### 18V LXT® 1/2" Impact Wrench Kit

Square Drive	1/2"
No Load Speed	1,600 RPM
Impacts Per Minute	2,200 IPM
Maximum Torque (ft.lbs./N•m)	325 ft.lbs./440 N•m
Battery	18V LXT® Lithium-Ion



18V LXT® 1/2" Impact Wrench Kit

Square Drive	1/2"
No Load Speed	1,600 RPM
Impacts Per Minute	2,200 IPM
Maximum Torque (ft.lbs./N•m)	325 ft.lbs./440 N•m
Battery	18V LXT® Lithium-Ion



LXT BRUSHLESS

XWT11T XWT11Z

#### 18V LXT® Brushless 3-Speed 1/2" **Impact Wrench Kit**

No Load Speed (var. 3 spd.) 0 - 1,600 / 0 - 2,100 / 0 - 2,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,600 / 0 - 3,500 IPM Maximum Torque (ft.lbs./N•m) 210 ft.lbs./280 N•m Nut-Busting Torque (ft.lbs./N•m) 295 ft.lbs./400 N•m



XWT11R

XWT11Z

#### 18V LXT® Compact Brushless 3-Speed 1/2" Impact Wrench Kit

No Load Speed (var. 3 spd.) 0 - 1,600 / 0 - 2,100 / 0 - 2,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,600 / 0 - 3,500 IPM Maximum Torque (ft.lbs./Nom) 210 ft.lbs./280 N•m 18V LXT® Compact Lithium-Ion



XWT05

#### 18V LXT® 1/2" Impact Wrench Kit

Square Drive	1/2"
No Load Speed (variable speed)	0 - 2,100 RPM
Impacts Per Minute (variable speed)	0 - 3,200 IPM
Maximum Torque (ft.lbs./N•m)	170 ft.lbs./230 N•m
Battery	18V LXT® Lithium-Ion



XWT09T

18V LXT® Brushless 7/16" Hex Impact

### Wrench Kit

Hex Shank No Load Speed (var. 3 spd.) 0 - 900 / 0 - 1,000 / 0 - 1,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,000 / 0 - 2,200 IPM Maximum Torque (ft.lbs./N•m) 590 ft.lbs./800 Nem 18V LXT® Lithium-Ion



XWT09XVZ

## 18V LXT® Brushless High Torque 7/16" Hex Utility Impact Wrench

No Load Speed (var. 3 spd.) 0 - 900 / 0 - 1,000 / 0 - 1,800 RPM Impacts Per Minute (var. 3 spd.) 0 - 1,800 / 0 - 2,000 / 0 - 2,200 IPM Maximum Torque (ft.lbs./Nom) 590 ft.lbs./800 Nem 18V LXT® Lithium-Ion



XWT01Z

Tool only battery 8

charger not included

#### 18V LXT® 7/16" Impact Wrench

Hex Shank	7/16"
No Load Speed	1,900 RPM
Impacts Per Minute	2,200 IPM
Maximum Torque (ft.lbs./N•m)	325 ft.lbs./440 N•m
Pottory	10V I VT® Lithium Ion



XWT06

#### 18V LXT® 3/8" Impact Wrench Kit

Square Drive	3/8"
No Load Speed (variable speed)	0 - 2,100 RPM
Impacts Per Minute (variable speed)	0 - 3,200 IPM
Maximum Torque (ft.lbs./N•m)	155 ft.lbs./210 N•m
Battery	18V LXT® Lithium-Ion



XWT12RB

#### 18V LXT® Sub-Compact Brushless 3/8" Impact Wrench Kit

Square Drive	3/8"
No Load Speed (var. 2 spd)	0 - 1,300 / 0 - 2,400 RPM
Impacts Per Minute (var. 2 spd.)	0 - 2,000 / 0 - 3,600 IPM
Maximum Torque (ft.lbs./N•m)	130 ft.lbs./180 N•m
Nut-Busting Torque (ft.lbs./N•m)	230 ft.lbs./310 N•m



LXT

XLT02 XLT02Z

#### 18V LXT® 3/8" Angle Impact Wrench Kit

Square Drive 3/8" No Load Speed (variable speed) 0 - 2,000 RPM Impacts Per Minute (variable spee 0 - 3,000 IPM Maximum Torque (ft.lbs./N•m) 44 ft.lbs./60 N•m Battery 18V LXT® Lithium-Ion



XTW01PT

XTW01ZK

#### 18V X2 LXT® (36V) Brushless **Shear Wrench Kit**

Battery		2X 18V LXT® Lithium-Ion
<b>Bolt Size Capacities:</b>	A325 (5/8",	3/4", 7/8"), A490 (5/8", 3/4")
No Load Speed		14 RPM
Maximum Torque (ft.lb	s./N•m)	593 ft.lbs./804 N•m
Last Off Contact		Vee



**UP TO 50% LONGER RUN TIME**\* Battery delivers constant power and run time in extreme temperatures, even in winter (-4°F/-20°C). Equipped with Star Protection Computer Controls™ to protect against overload, over-discharge, and overheating. \*Vs. Makita® 18V Ni-Cd battery



55 Minute Charge Time













30 Minute





## **XSF03TX2**

#### 18V LXT® Brushless 4,000 RPM Drywall Screwdriver Kit, with Autofeed Magazine

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Lithium-lon
Overall Length	16"



XSF03RX2 XSF03Z

### 18V LXT® Compact Brushless 4,000 RPM **Drywall Screwdriver Kit w Autofeed Magazine**

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Compact Lithium-Ion
Overall Length	16"



Designed for Makita cordless screwdriver models XSF03, XSF04 and corded screwdriver models FS2200, FS4200, FS6200



#### LXT BRUSHLESS

XSF03Z XSF03T

#### 18V LXT® Brushless 4,000 RPM Drywall Screwdriver Kit

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	9-7/8"
Net Weight (with battery)	3.8 lbs.



#### LXT BRUSHLESS

XSF03R XSF03Z

#### 18V LXT® Compact Brushless 4,000 RPM Drywall Screwdriver Kit

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Battery	18V LXT® Compact Lithium-Ion
Overall Length	9-7/8"
Net Weight (with battery)	3.2 lbs.



 Quick attachment and removal of collated magazine Screw depth dial adjustment for increased precision

Screw strip can be released in reverse direction for easy screw clearance

#### LXT BRUSHLESS

XSF04R XSF04Z

#### 18V LXT® Compact Brushless 2,500 RPM Drywall Screwdriver Kit

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 2,500 RPM
Battery	18V LXT® Compact Lithium-Ion
Overall Length	9-3/8"
Net Weight (with battery)	3.5 lbs.



LXT BRUSHLESS

Tool only battery & charger not included

XSF05T XSF05Z

#### 18V LXT® Brushless 2.500 RPM Screwdriver Kit

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 2,500 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	9-3/8"
Net Weight (with battery)	3.9 lbs.



#### XRF02Z

**Gun Kit** 

#### 18V LXT® Autofeed Screwdriver

Bit Type	1/4" Hex
No Load Speed	4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Lithium-Ion
Overall Length	16-3/4"



#### XRF01Z

#### 18V LXT® Autofeed Screwdriver

Bit Type	1/4" Hex
No Load Speed	4,000 RPM
Collated Screw Capacity	1-3/4" - 2-15/16"
Battery	18V LXT® Lithium-Ion
Overall Length	18-1/4"





<u>LXT</u>

XOC01T XOCO1Z

#### **18V LXT® Cut-Out Tool Kit**

Collet Capacity	1/8", 1/4"
No Load Speed	30,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	12-3/8"
Net Weight (with hattery)	3.7 lhs



XDS01Z

#### 18V LXT® Cut-Out Saw

Max. Cutting Capacities:	Drywall (1-3/16"), Wood (9/16")
Strokes Per Minute (variable spe	ed) 0 - 6,000 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	9-1/8"
Length of Stroke	1/4"



#### XGC01T1 XGC01Z 18V LXT® 10 oz. Caulk and Adhesive

Capacity (caulk or sealants)	10 oz.
Dispense Force	1,100 lbs.
Inches Per Minute (variable speed)	0 - 66 IPM
Speed Settings	5
Battery	18V LXT® Lithium-lon



#### 18V LXT® 20 oz. Barrel Style Caulk and **Adhesive Gun Kit**

20 oz.
1,100 lbs.
0 - 66 IPM
5
18V LXT® Lithium-lon



XGC01T1C XGC01ZC

#### 18V LXT® 29 oz. Caulk and Adhesive **Gun Kit**

Capacity (caulk or sealants)	29 oz.
Dispense Force	1,100 lbs.
Inches Per Minute (variable speed)	0 - 66 IPM
Speed Settings	5
Battery	18V LXT® Lithium-Ion

#### **CAULKING GUN ACCESSORIES**

196351-8 10 oz. Cartridge

 360° rotatable cartridge holder fits 10 oz. and 300 ml cartridges



 Holds 20 oz. c; style, sausage style and bulk caulks and



29 oz. Cartridge **Holder Set** 

· Complete set include: all you need to utilize 29oz. cartridge style containers





#### **NAILERS & STAPLERS**







### 18V LXT® 2-1/2" Straight Finish Nailer

#### Kit, 16 Ga. Power Type Cordless Fastening category Finish Nail Size 1" to 2-1/2" (16 ga.) Maximum Magazine Capacity 110 18V LXT® Lithium-Ion



#### XNB01Z

#### 18V LXT® 2" Brad Nailer, 18 Gauge

Power Type	Cordless
Battery	18V LXT® Lithium-Ion
Nail Size	5/8" to 2" (18 ga.)
Maximum Magazine Capacity	100
Fastening category	Brad



#### XTP02Z

LXT.

#### 18V LXT® 1-3/8" Pin Nailer, 23 Gauge

Power Type		Cordless
Fastening category		Pin
Nail Size	5/8", 11/16", ¾", 1	", 1-3/16", 1-3/8" (23 ga.)
Maximum Magazine Capacity		120
Battery		18V LXT® Lithium-Ion



XTS01T

#### 18V LXT® 3/8" Crown Stapler Kit

Power Type	Cordless
Leg Length	3/8" to 7/8"
Gauge	T50® Style
Maximum Magazine Capacity	98
Battery	18V LXT® Lithium-Ion



#### LXT BRUSHLESS

XSR01PT

### 18V X2 LXT® (36V) Brushless Rear Handle 7-1/4" Circular Saw Kit

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-9/16"), 53° (1-1/2"), 45° (1-3/4")
No Load Speed	5,100 RPM
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XSH07PTU XSH07ZU

## 18V X2 LXT<sup>®</sup> (36V) Brushless 7-1/4" Circular Saw Kit, AWS™ Capable

Blade Diameter	7-1/4'
Arbor	5/8'
Max. Cutting Capacities:	90° (2-5/8"), 50° (1-5/16"), 45° (1-13/16")
No Load Speed	6,000 RPN
Battery	2X 18V LXT® Lithium-lor



LXT BRUSHLESS

**XSHO6PT** 

## 18V X2 LXT® (36V) Brushless 7-1/4" Circular Saw Kit

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities: 90° (2	-5/8"), 50° (1-5/16"), 45° (1-13/16")
No Load Speed	6,000 RPM
Battery	2X 18V LXT® Lithium-Ion



LXT X2 FET + FET 36V

XSH01PT

XSH01Z

### 18V X2 LXT® (36V) 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities	s: 90° (2-5/8"), 50° (1-11/16"), 45° (1-7/8")
No Load Speed	4,800 RPM
Battery	2X 18V LXT® Lithium-Ion



#### <u>LXT</u>.BRUSHLESS

Saw Kit

XSH03Z XSH03T

### 18V LXT® Brushless 6-1/2" Circular

out itil	
Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-1/4"), 50° (1-7/16"), 45° (1-5/8")
No Load Speed	5,000 RPM
Battery	18V LXT® Lithium-Ion



XSH05ZB

## 18V LXT<sup>®</sup> Sub-Compact Brushless 6-1/2" Circular Saw, AWS™ Capable

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-5/8")
No Load Speed	5,000 RPM
Battery	18V LXT® Compact Lithium-Ion



LXT BRUSHLESS

6-1/2" Circular Saw Kit

#### XSH04RB XSH04ZB 18V LXT® Sub-Compact Brushless

Blade Diameter	6-1/2"
Arbor	5/8"
No Load Speed	5,000 RPM
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-5/8")
Overall Length	10-5/8"



XSS03Z

#### 18V LXT® 5-3/8" Circular Trim Saw

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Capacities:	90° (2"), 45° (1-3/8")
No Load Speed	3,600 RPM
Battery	18V LXT® Lithium-Ion



XPS01PTJ XPS01Z 18V X2 LXT® (36V) Brushless 6-1/2"

Blade Diamete 6-1/2" Arbor (mm) 20 mm Max. Cutting Capacities: 90° (2-3/16"), 45° (1-9/16") No Load Speed (variable speed) 2,500 - 6,300 RPM 2X 18V LXT® Lithium-Ion Battery

**Plunge Circular Saw Kit** 



XPS02PTU XPS02ZU 18V X2 LXT® (36V) Brushless 6-1/2"

Blade Diameter	6-1/2"
Arbor (mm)	20 mm
Max. Cutting Capacities:	90° (2-3/16"), 45° (1-9/16")
No Load Speed (variable speed)	2,500 - 6,300 RPM
Battery	2X 18V LXT® Lithium-Ion

Plunge Circular Saw Kit, AWS



XSS01T XSS01Z

18V LXT® 6-1/2" Circular Saw Kit

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-9/16")
No Load Speed	3,700 RPM
Battery	18V LXT® Lithium-Ion



battery & charger not included

XSS02Z

#### 18V LXT® 6-1/2" Circular Saw

6-1/2"
5/8"
90° (2-1/4"), 45° (1-9/16")
3,700 RPM
18V LXT® Lithium-Ion





<u>LXT</u> BRUSHLESS

XVJ01Z

#### 18V LXT® Brushless Barrel Grip Jig Saw

Length of Stroke	1"
Max. Cutting Capacities (90°): Wood (5-5/16"), Mild Steel	(3/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	800 - 3,500 SPM
Blade Shank	"T" Tang
Battery	18V LXT® Lithium-lon



<u>LXT BRUSHLESS</u>

XVJ02Z

Tool only, battery & charger not included

#### 18V LXT® Brushless Jig Saw

Length of Stroke	1"
Max. Cutting Capacities (90°): Wood (5-5/16"), Mild Steel	(3/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	800 - 3,500 SPM
Blade Shank	"T" Tang
Battery	18V LXT® Lithium-lon



<u>LXT</u>

(VJ03	XVJ03Z

#### 18V LXT® Jig Saw Kit

Length of Stroke	1"
Max. Cutting Capacities (90°): Wood (5-5/16"), Steel (3/8	3"), Aluminum (25/32")
Strokes Per Minute (variable speed)	0 - 2,600 SPM
Blade Shank	"T" Tang
Battery	18V LXT® Lithium-Ion



LXT BRUSHLESS

XRJ06PT

### 18V X2 LXT® (36V) Brushless Recipro Saw Kit

Length of Stroke	1-1/4"
Max. Cutting Capacities:	Wood w/ 12" blade (10"), Pipe (5-1/8")
Strokes Per Minute (var. 2	spd.) 0 - 2,300 / 0 - 3,000 SPM
Overall Length	17-3/4"
Battery	2X 18V LXT® Lithium-Ion





XRJ05T XRJ05Z

#### 18V LXT® Brushless Recipro Saw Kit

Length of Stroke	1-1/4"
Max. Cutting Capacities:	Wood w/ 12" blade (10"), Pipe (5-1/8")
Strokes Per Minute (var. 2	spd.) 0 - 2,300 / 0 - 3,000 SPM
Overall Length	17-1/4"
Battery	18V LXT® Lithium-Ion



LXT

XRJ04T

#### 18V LXT® Recipro Saw Kit

Length of Stroke		1-1/4"
Max. Cutting Capacities:	Wood w/ 12"	blade (10"), Pipe (5-1/8")
Strokes Per Minute (varial	ole speed)	0 - 2,800 SPM
Overall Length		19-1/8"
Battery		18V LXT® Lithium-lon



LXT

XRJ01T XRJ01Z

#### 18V LXT® Compact Recipro Saw Kit

Length of Stroke	1/2"
Max. Cutting Capacities:	Wood (2"), Pipe (2")
Strokes Per Minute (variable speed)	0 - 3,000 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	15-5/8"



LXT BRUSHLESS

Includes 2.0 A

XRJ07R1B

XRJ07ZB

### 18V LXT® Sub-Compact Brushless Recipro Saw Kit

Length of Stroke	13/16"
Max. Cutting Capacities:	Wood w/ 12" blade (10"), Pipe (5-1/8")
Strokes Per Minute (varia	ole speed) 0 - 3,000 SPM
Overall Length	12-1/2"
Battery	18V LXT® Compact Lithium-Ion







## 18V LXT® BL™ 5-7/8" Metal Cutting Saw Kit, w/ Electric Brake and Chip Collector

Blade Diameter	5-7/8
Arbor	5/8'
Max. Cutting Depth	2-1/4
No Load Speed	4,200 RPN
Electric Brake	Yes



<u>LXT</u> BRUSHLESS XSC02T

## 18V LXT® Brushless 5-7/8" Metal Cutting Saw Kit

•	
Blade Diameter	5-7/8"
Arbor	5/8"
Max. Cutting Depth	2-1/4"
No Load Speed	3,900 RPM
Battery	18V LXT® Lithium-Ion

XSC02Z



**XSCO3T** XSC03Z

## 18V LXT® 5-3/8" Metal Cutting Saw Kit, with Electric Brake and Chip Collector

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Depth	2"
No Load Speed	3,600 RPM
Electric Brake	Yes



XSC01T XSC01Z

### 18V LXT® 5-3/8" Metal Cutting Saw Kit

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Depth	2"
No Load Speed	3,600 RPM
Battery	18V LXT® Lithium-Ion



18V LXT® Portable Band Saw Kit

Max. Cutting Capacities: Round workpiece (4-3/4"), Rectangular workpiece (4-3/4" x 4-3/4")	
No Load Speed (ft./min., var. speed)	275 - 530 ft./mir
Blade Length	44-7/8
Battery	18V LXT® Lithium-lo
Overall Length	20-5/8



XBP03T XBP03Z

#### 18V LXT® Compact Band Saw Kit

Max. Cutting Capacities: Round workpiece (2-1/2"), Rectangular workpiece (2-1/2" x 2-1/2")	
No Load Speed (ft./min.)	630 ft./min.
Blade Length	32-7/8"
Battery	18V LXT® Lithium-Ion
Overall Length	18-3/4"



LXT XDG01Z XDG01T

#### 18V LXT® 1/4" Die Grinder Kit

Max. Wheel Diameter	1-1/2"
Battery	18V LXT® Lithium-Ion
Collet	1/4"
No Load Speed	25,000 RPM
Lock-On / Lock-Off	Yes / No



<u>LXT</u>

XDG02Z

#### 18V LXT® 1/4" Compact Die Grinder

Max. Wheel Diameter	1-1/2"
Battery	18V LXT® Lithium-Ion
Collet	1/4"
No Load Speed	26,000 RPM
Lock-On / Lock-Off	Yes / No





WM XWL01PT XWL01Z

#### 18V X2 LXT® (36V) Brushless 14" Cut-Off Saw Kit

Battery	2X 18V LXT® Lithium-Ion
Blade Diameter	14"
No Load Speed	3,800 RPM
Max. Cutting Capacity (at 90°)	5"
Arbor	1"



W XAG23ZU1

#### 18V X2 LXT® (36V) Brushless 9" Cut-Off/Angle Grinder, AWS™

Wheel Diameter	9"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG13PT1 XAG13Z1

#### 18V X2 LXT® (36V) Brushless 9" Cut-Off/Angle Grinder Kit

Wheel Diameter	9"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



WM XAG22ZU1

#### 18V X2 LXT® (36V) Brushless 7" Cut-Off/Angle Grinder, AWS™

Wheel Diameter	7"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	7,800 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG12Z1

XAG12PT1 18V X2 LXT® (36V) Brushless 7" Cut-Off/Angle Grinder Kit

Wheel Diameter	7"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	7,800 RPM
Spindle Thread	5/8" - 11 UNC
Lock-on / Lock-Off	Nn / Yes



XAG21ZU

#### 18V LXT® Brushless 4-1/2" / 5" Paddle Switch Cut-Off/Angle Grinder, AWS"

Wheel Diameter	5"
Battery	18V LXT® Lithium-lon
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG20Z

#### 18V LXT® Brushless 4-1/2" / 5" Paddle Switch Cut-Off/Angle Grinder

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG17ZU

#### 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder, AWS

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Vec / No



KM XAG16Z

#### 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



XAG11T XAG11Z 18V LXT® Brushless 4-1/2" / 5" Cut-Off/

Angle Grinder Kit	/ 5 Out-011/
Wheel Diameter	5"
Battery	18V LXT® Lithium-lon
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG09Z

#### 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ **Angle Grinder**

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



<u>LXT</u>.BRUSHLESS

XAG04T XAG04Z 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder Kit

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



XNJ01T XNJ01Z

18V LXT® 16 Gauge Nibbler Kit

Capacities: Aluminum (12 ga.), Mild Steel (16 ga.), Stainless (18 ga.) Cutting Radius: Inner Edge (1-3/4"), Outer Edge (2") Strokes Per Minute (variable speed) 0 - 1,900 SPM Battery 18V LXT® Lithium-Ion Overall Length 12-3/8"



LXT

XSJ02Z

### 18V LXT® 16 Gauge Compact Straight

Capacities:	Mild Steel (16 ga.), Stainless (18 ga.)
Strokes Per Minute	4,300 SPM
Battery	18V LXT® Lithium-Ion
360° Rotating Head	No
Overall Length	14-1/4"



LXT

XSJ01T XSJ01Z

#### 18V LXT® 18 Gauge Straight Shear Kit

Capacities:	Mild Steel (18 ga.), Stainless (20 ga.)
Strokes Per Minute	3,000 SPM
Battery	18V LXT® Lithium-Ion
360° Rotating Head	Yes
Overall Length	13-3/4"



<u>LXT</u> BRUSHLESS

Tool only, battery & charger not included

XCS03Z

#### 18V LXT® Brushless Threaded Rod Cutter

Blade Configuration	Double sided
Max. Cutting Capacity	3/8"
Min. Cutting Capacity	1/4"
Battery	18V LXT® Lithium-Ion
Overall Length	7-7/8"

#### 18V LXT® METALWORKING / WOODWORKING / CONCRETE



XSL04PTU

Sliding Compound Miter Saw Kit, AWS' Blade Diameter Max. Cutting Capacities (Miter): 90° (2-13/16" x 12"), 45° L/R (2-13/16" x 8-1/2")

18V X2 LXT® (36V) Brushless 10" Dual-Bevel



#### CAPACITY

Cuts up to 6-5/8" crown (nested), 5-1/4" base (vertical), and crosscuts à 4x12 at 90°



LXT BRUSHLESS (RAN)

18V X2 LXT® (36V) Brushless 10" Dual-**Bevel Sliding Compound Miter Saw Kit** 

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities (Mite 90° (2-13/10	er): 6" x 12"), 45° L/R (2-13/16" x 8-1/2")
No Load Speed	4,400 RPM
Battery	2X 18V LXT® Lithium-Ion





#### 18V X2 LXT® (36V) Brushless 7-1/2" **Dual Slide Compound Miter Saw**

Blade Diameter	7-1/2"
Arbor	5/8"
Max. Cutting Capacities (Miter): 90° (2-1/16" x 11-	-3/4"), 45° L/R (2-1/16" x 8-3/8")
No Load Speed	5,700 RPM
Battery	2X 18V LXT® Lithium-Ion



#### 18V LXT® Brushless 6-1/2" Compact **Dual-Bevel Compound Miter Saw**

XSL05Z

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities (Miter): 90° (1-13/16" x 3-5/8	3"), 45° L/R (1-13/16" x 2-9/16")
No Load Speed	5,000 RPM
Battery	18V LXT® Lithium-Ion



LXT **XMT035** XMT03Z

#### 18V LXT® Multi-Tool Kit

Oscillations Per Minute	6,000 - 20,000 OPM
Oscillation Angle	3.2°
Overall Length	13-3/8"
Net Weight (with battery)	4.9 lbs.
Battery	18V LXT® Lithium-Ion



LXT

XOB01T XOBO1Z

#### 18V LXT® 5" Random Orbit Sander Kit

Pad Size (round)	5"
Abrasive Disc Size	5"
Orbits Per Minute (3 speed)	7,000, 9,500, 11,000 OPM
Orbit Diameter	1/8"
Battery	18V LXT® Lithium-Ion



xtro1t8J	XTR01Z

#### **18V LXT® Brushless Compact Router** Starter Kit

Collet	1/4"
No Load Speed (variable speed)	10,000 - 30,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	5-1/4"
Net Weight (with battery)	4.6 lbs.



XTR01T7 XTR01Z 18V LXT® Brushless Compact Router Kit

Collet	1/4"
No Load Speed (variable speed)	10,000 - 30,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	5-1/4"
Net Weight (with battery)	4.6 lbs.



XPK01Z 18V LXT® 3-1/4" Planer

Planing Width	3-1/4"
Planing Depth	5/64"
No Load Speed	14,000 RPM
Overall Length	13-1/8"
Net Weight (with battery)	17.4 lbs.



XJP03Z 18V LXT® Plate Joiner

Blade Diameter Max. Cutting Depth 3/4" No Load Speed 12,000 RPM Overall Length 13-3/4" 18V LXT® Lithium-Ion Battery



XRH07PTU XRH07ZKU 18V X2 LXT® (36V) Brushless 1-9/16"

Advanced AVT® Rotary Hammer Kit, AWS™ Max. Capacity (concrete drilling) 1-9/16" Optimum Range (concrete drilling) 5/8" - 1-1/4" Max. Capacity (concrete drilling w/ core b 4-1/8" Impact Energy 8.4 ft.lbs. / 11.4 J

1,450 - 2,900 BPM

Blows Per Minute (variable speed)



#### 18V X2 LXT® 36V Brushless 1-1/8" AVT Rotary Hammer Kit, AFT®, AWS™ Capable

XRH10ZW

XRH10PTW

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



#### 18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer, AFT®, AWS™ Capable

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer, AFT®, AWS™ Capable

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM





LXT BRUSHLESS



#### 18V X2 LXT® 36V Brushless 1-1/8" AVT® Rotary Hammer Kit w/ HEPA Dust Extractor

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



LXT BRUSHLESS

XRH08PT XRH08Z	3

### 18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer Kit

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



<u>| XT | X2 | FBV + FBV 36</u>V

XKH05PT			XRH05Z	4
8V X2 LXT®	(36V) 1"	Rotary	Hammer	Kit

Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 5/8"
Impact Energy	2.2 ft.lbs. / 3 J
Blows Per Minute (variable speed)	0 - 5,000 BPM
No Load Speed (variable speed)	0 - 1,250 RPM



<u>LXT</u> BRUSHLESS

ANNUILLA	ARHUIZVA
18V LXT® Brushless 1"	
Kit, w/ HEPA Dust Extra	actor

•	
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Impact Energy	1.7 ft.lbs. / 2.4 J
Blows Per Minute (variable speed)	0 - 4,700 BPM
No Load Speed (variable speed)	0 - 950 RPM



LXT BRUSHLESS

XRH01T	XRH01Z
--------	--------

#### 18V LXT® Brushless 1" Rotary Hammer Kit

Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Impact Energy	1.7 ft.lbs. / 2.4 J
Blows Per Minute (variable speed)	0 - 4,700 BPM
No Load Speed (variable speed)	0 - 950 RPM



XRH04T

#### 18V LXT® 7/8" Rotary Hammer Kit

Max. Capacity (concrete drilling)	7/8"
Optimum Range (concrete drilling)	5/32" - 1/2"
Impact Energy	1.4 ft.lbs. / 1.9 J
Blows Per Minute (variable speed)	0 - 4,000 BPM
No Load Speed (variable speed)	0 - 1,200 RPM



XRH03T XRH03Z

#### 18V LXT® 7/8" Rotary Hammer Kit

Max. Capacity (concrete drilling)	7/8"
Optimum Range (concrete drilling)	5/32" - 1/2"
Impact Energy	1.4 ft.lbs. / 1.9 J
Blows Per Minute (variable speed)	0 - 4,000 BPM
No Load Speed (variable speed)	0 - 1,200 RPM



LXT BRUSHLESS

XRH12TW XRH12ZW

### 18V LXT® Brushless 11/16" AVT® Rotary Hammer Kit w/ Dust Extractor, AWS™ Capable

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	1.7 J / 1.2 ft.lbs.
Blows Per Minute (variable speed)	0 - 5,000 BPM
No Load Speed (variable speed)	0 - 1,350 RPM



XRH12Z

#### 18V LXT® Brushless 11/16" AVT® Rotary Hammer, AWS™ Capable

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	1.7 J / 1.2 ft.lbs.
Blows Per Minute (variable speed)	0 - 5,000 BPM
No Load Speed (variable speed)	0 - 1,350 RPM



LXT BRUSHLESS

#### 18V Sub-Compact BL™ 11/16" Rotary Hammer Kit w/ Accessories

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	.88 ft.lbs. / 1.2 J
Blows Per Minute (variable speed)	0 - 4,800 BPM
No Load Speed (variable speed)	0 - 680 RPM



LXT BRUSHLESS

CONCRETE VIBRATORS

XRH06RB	XRH06ZB

#### 18V LXT® Sub-Compact Brushless 11/16" Rotary Hammer Kit

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	.88 ft.lbs. / 1.2 J
Blows Per Minute (variable speed)	0 - 4,800 BPM
No Load Speed (variable speed)	0 - 680 RPM



WARTO1TK XRT01ZK 18V LXT® Brushless Rebar Tying Tool Kit

Battery	18V LXT® Lithium-Ion
Rebar Size Capacity	#3x#3 - #5x#5
Approx. Ties:	Per charge (5,300), Per Reel (120)
Tie Wraps	3
Tying Speed (second)	.8



LXT BRUSHLESS AUTOMATIC

XCS02T1 XCS02ZK

#### 18V LXT® Brushless Steel Rod Flush-**Cutter Kit**

Blade Diameter	4-5/16"
Cutting Capacity (thickness)	1"
No Load Speed	2,200 RPM
Lock-On / Lock-Off	Yes / No
Switch Type	Slide



XCS01T1 XCS01Z

#### **18V LXT® Rebar Cutter Kit**

Blade Configuration	Double sided
Cutting Capacity (thickness)	3/4"
Battery	18V LXT® Lithium-lon
Overall Length	16-1/5"
Net Weight (with battery)	24.3 lbs.



18V LXT® 8' Concrete Vibrator Kit

No Load Vibrations/Min.	12,500
Vibrator Head Diameter	1"
Vibrator Head Length	8-11/16"
Shaft Length	96"
Battery	18V LXT® Lithium-Ion



18V LXT® 4' Concrete Vibrator Kit

No Load Vibrations/Min.	13,000
Vibrator Head Diameter	1"
Vibrator Head Length	8-11/16"
Shaft Length	48"
Battery	18V LXT® Lithium-Ion

#### **CHAIN SAWS**



#### LXT BRUSHLESS



XCU04PT	xcu	04Z

#### 18V X2 (36V) LXT® Brushless 16" Chain Saw Kit

Guide Bar Length	16"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.8 lbs.



#### LXT BRUSHLESS



#### 18V X2 (36V) LXT® Brushless 14" Chain Saw Kit

Guide Bar Length	14"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.5 lbs.



#### LXT BRUSHLESS



#### 18V X2 (36V) LXT® Brushless 14" Chain Saw Kit

Guide Bar Length	14"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.5 lbs.



### 

XCU02PT

#### 18V X2 (36V) LXT® 12" Chain Saw Kit

Guide Bar Length	12"
Pitch	3/8"
Gauge	.043"
Chain Speed	1,650 FPM
Net Weight (with battery)	10.1 lbs.



#### LXT BRUSHLESS



#### 18V LXT® Brushless 10" Top Handle **Chain Saw Kit**

Guide Bar Length	10"
•	
Pitch	3/8"
Gauge	.043"
Chain Speed	4,720 FPM
Net Weight (with battery)	7.2 lbs.



LXT

XCU01Z

#### 18V LXT® 4-1/2" Chain Saw

Guide Bar Length	4-1/2"
Pitch	1/4"
Gauge	.050"
Chain Speed	980 FPM
Net Weight (with battery)	5.4 lbs.



#### LXT BRUSHLESS

XBU02PT XBU02Z

### 18V X2 (36V) LXT® Brushless Blower Kit

Max. Air Volume	473 CFM
Max. Air Velocity	120 MPH
No Load Speed (variable speed)	11,400 - 21,500 RPM
Battery	2X 18V LXT® Lithium-Ion
Sound Pressure (per Ansi B175.2 sta	andard) 61 dB(A)



#### LXT X2 630 + 637 360

#### XBU01PT 18V X2 (36V) LXT® Blower Kit

Max. Air Volume	155 CFM
Max. Air Velocity	208 MPH
No Load Speed (2 spd)	10,000/17,000 RPM
Battery	2X 18V LXT® Lithium-Ion
Sound Pressure (per Ansi B175.	.2 standard) 60.6 dB(A)



DUB183Z

#### 18V LXT® Floor Blower

Max. Air Volume	91 CFM
Max. Air Velocity	116 MPH
No Load Speed (variable speed)	0 - 18,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	33-1/4"



DUB182T1	DUB182Z	Z

#### 18V LXT® Blower Kit

Max. Air Volume	91 CFM
Max. Air Velocity	179 MPH
No Load Speed (variable speed)	0 - 18,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	20-3/4"



#### LXT BRUSHLESS

XRU09PT XRU09Z	Z

#### 18V X2 (36V) LXT® Brushless **String Trimmer Kit**

Cutting Capacity (diameter)	13-3/4"
No Load Speed (2 spd)	5,000/6,500 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	69"
Net Weight (with hattery)	9 9 lhs



#### 18V LXT® Brushless String Trimmer Kit

Cutting Capacity (diameter)	11-3/4"
No Load Speed (2 spd)	4,000/6,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	70-1/2"
Net Weight (with battery)	7.4 lbs.



#### XRU13Z

#### 18V LXT® Brushless Curved Shaft **String Trimmer**

Cutting Capacity (diameter)	11-3/4"
No Load Speed (3 spd)	4,000/5,000/6,000 RPM
Arbor Shaft	M8 x 1.25 RH
Overall Length	63-3/4"
Battery	18V LXT® Lithium-lon



#### XRU02Z

#### 18V LXT® String Trimmer

Cutting Capacity (diameter)	10-1/4"
No Load Speed	7,800 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	56-1/2"
Net Weight (with battery)	6.4 lbs.



### LXT BRUSHLESS



#### 18V X2 (36V) LXT® Brushless Couple Shaft **Power Head Kit with Trimmer Attachment**

XUX01ZM5

Cutting Capacity (diameter)	17"
No Load Speed (var. 3 spd.)	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	69"
Net Weight (with battery)	17.2 lbs.



### <u>LXT</u> BRUSHLESS

XUX01Z

battery & charger not included

#### 18V X2 (36V) LXT® Brushless **Couple Shaft Power Head**

Shaft Type	Multi-tool attachment
No Load Speed (var. 3 spd.)	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	39-3/4"
Net Weight (with battery)	9.8 lbs.



#### **HEDGE TRIMMERS**



#### <u>LXT</u> BRUSHLESS



#### KEN XHU07T 18V LXT® Brushless 24" Hedge Trimmer Kit

Blade Length 24" Strokes Per Minute 4,400 SPM Overall Length 44-1/4" 18V LXT® Lithium-Ion Battery Net Weight (without battery 7.3 lbs.



### XT BRUSHLESS



#### 18V LXT® Brushless 30" Hedge Trimmer Kit

Blade Length	30"
Strokes Per Minute	4,400 SPM
Overall Length	49-3/4"
Battery	18V LXT® Lithium-lon
Net Weight (without battery)	7.7 lbs.



#### LXT X2 1817+1817-36V



#### XHU04PT 18V X2 (36V) LXT® 25-1/2" Hedge Trimmer Kit

Blade Length	25-1/2"
Strokes Per Minute	1,800 SPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	48-3/4"
Net Weight (with battery)	12.2 lbs.



Includes one battery LXT XHU02M1

#### 18V LXT® 22" Hedge Trimmer Kit

Blade Length	22"
Strokes Per Minute	1,350 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	38"
Net Weight (with battery)	7.4 lbs.

#### **GRASS CUTTERS & WHEELBARROWS**



Tool only, battery & charger not included

#### XMU04Z

#### 18V LXT® Grass Shear

Cutting Capacity (width)	6-5/16"
Depth Adjustment Range	9/32", 25/32", 1"
Strokes Per Minute	2,500 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	13-7/8"



LXT X2 180 + 180 360

XML02PT XML02Z

#### 18V X2 (36V) LXT® 17" Cordless Lawn **Mower Kit**

<b>Cutting Capacities:</b>	Width (17"), Height Range (13/16" - 2-5/16")
No Load Speed	3,600 RPM
Battery	2X 18V LXT® Lithium-Ion
Dimensions (LxWxH	) 58-3/4" x 18-1/8" x 37-1/2"
Net Weight (with bat	ttery) 40.8 lbs.



LXT BRUSHLESS

XUC01PTX1	XUCO1X1	1
-----------	---------	---

#### 18V X2 LXT® Brushless Power-Assisted Wheelbarrow Kit

Speed Forward (High/Low MPH)	2.5 / 1 MPH
Speed Reverse (MPH)	.62 MPH
Max. Load Capacity	275 lbs.
Max. Grade	12°
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XUC01PTX2

2	XUC01X2	$\mathbf{Z}$

#### 18V X2 LXT® Brushless Power-Assisted **Flat Dolly Kit**

Speed Forward (High/Low MPH)	2.5 / 1 MPH
Speed Reverse (MPH)	.62 MPH
Max. Load Capacity	275 lbs.
Max. Grade	12°
Battery	2X 18V LXT® Lithium-Ion

#### **VACUUMS**



XLC02RB1W

#### **18V LXT® Compact Vacuum Kit**

Capacity (pint)	1.3 pint
Continuous Use (max, in minutes)	20 min.
Battery	18V LXT® Compact Lithium-Ion
Overall Length	18-3/4"
Net Weight (with battery)	2.7 lbs.

XLC02ZW



#### 18V LXT® Vacuum

Capacity (pint)	1 pint
Continuous Use (max, in minutes)	60 min.
Battery	18V LXT® Lithium-Ion
Overall Length	19"
Net Weight (with battery)	2.9 lbs.



18V LXT® Compact Vacuum Kit

Capacity (pint)	1.3 pint
Continuous Use (max, in minutes	s) 15 min.
Battery	18V LXT® Compact Lithium-Ion
Overall Length	18-3/4"
Net Weight (with battery)	2.7 lbs.





LXT CXT

#### 199553-5

#### Cyclonic Vacuum Attachment

- Cyclonic action captures up to 90% of dust particles
- Reduces need to empty vacuum main canister/ filter by up to 84%
- One-touch release for easy disposal of debris 360° positioning for access in tight spaces
- FITS ALL 18V LXT® AND 12V CXT® HAND VACUUMS



#### LXT BRUSHLESS



#### 18V X2 LXT® Brushless **Robotic Vacuum Kit**

Gross Container Size	.66 gal.
Cleaning Width:	8-7/8", w/ Side Brushes (18-1/16")
Working Sound Level	64 dB(A)
Continuous Use (max, in mir	nutes) 200 min.
Battery	2X 18V LXT® Lithium-Ion



DCL501Z

### 18V LXT® Brushless Cyclonic Canister

Capacity (pint)	.53 pint
Air Flow Rate	46 CFM
Static Water Lift	26.5"
Continuous Use (max, in minutes)	64 min.
Battery	18V LXT® Lithium-lon



<u>LXT</u> BRUSHLESS

XCV11T XCV11Z

#### 18V LXT® Brushless 2 Gal. HEPA Filter Portable Wet/Dry Dust Extractor/Vacuum Kit

Gross Container Size	2 gal.
Air Flow Rate	57 CFM
Static Water Lift	27"
Continuous Use (max, in minutes)	60 min.
Battery	18V LXT® Lithium-Ion



charger not included

XCV02Z

#### 18V LXT® 3/4 Gallon Portable Dry Dust Extractor/Blower

Gross Container Size	.75 gal.
Air Flow Rate	49 CFM
Static Water Lift	24"
Continuous Use (max, in minutes)	42 min.
Battery	18V LXT® Lithium-Ion



XCV08PT	XCV08Z
101/ V2   VT® /2C1/\ Drug	bloce 2.1 Cal HEDA

## 18V X2 LXT<sup>®</sup> (36V) Brushless 2.1 Gal HEPA Filter Dry Dust Extractor/Vac Kit, AWS<sup>™</sup>

Gross Container Size	2.1 gal.	
Air Flow Rate	74 CFM	
Static Water Lift	39"	
Continuous Use (max, in minutes)	75 min.	
Battery	2X 18V LXT® Lithium-Ion	



AUTUSI		201002
18V X2 LXT®	(36V) Brushles	s 1/2 Gallor
<b>HEPA Filter B</b>	ackpack Dry V	acuum Kit

Gross Container Size	.5 gal.
Air Flow Rate	70 CFM
Static Water Lift	44"
Continuous Use (max, in minutes)	116 min.
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XCV07P1	ГХ	XCV07	ZX	<b>Z</b>
8V X2 LXT®	(36V)	<b>Brushless 2.1</b>	Ga	llon

### **HEPA Filter Dry Dust Extractor Kit**

Gross Container Size	2.1 gal.	
Air Flow Rate	74 CFM	
Static Water Lift	39"	
Continuous Use (max, in minutes)	75 min.	
Battery	2X 18V LXT® Lithium-lon	



XCV05PT	XCV05Z	4
	6V) Brushless Backp	ack
<b>Dust Extractor/</b>	Vacuum Kit	

Gross Container Size	.5 gal.
Air Flow Rate	53 CFM
Static Water Lift	28.5"
Continuous Use (max, in minutes)	90 min.
Battery	2X 18V LXT® Lithium-lon



XCV04PT XCV04Z 18V X2 LXT® (36V) 2.1 Gallon HEPA Filter Dry Dust Extractor/Vacuum Kit

Gross Container Size	2.1 gal.
Air Flow Rate	127 CFM
Static Water Lift	96"
Continuous Use (max, in minutes)	65 min.
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XCV06Z 18V X2 LXT® (36V) Brushless 2.1 Gallon

WCt/ Dry Dust Extractor/ Vacuum		
Gross Container Size	2.1 gal.	
Wet Capacity	1.5 gal.	
Air Flow Rate	74 CFM	
Static Water Lift	39"	
Continuous Use (max, in minutes)	75 min.	



XCV05ZX

#### 18V X2 LXT® (36V) Brushless Backpack **Dust Extractor/Vacuum**

Gross Container Size	.5 gal.
Air Flow Rate	53 CFM
Static Water Lift	28.5"
Continuous Use (max, in minutes)	60 min.
Battery	2X 18V LXT® Lithium-Ion



**XCV10ZX** 

Tool only battery &

charger not included

Tool only, battery &

charger not included

Tool only

18V X2 LXT® (36V) BL™ 1/2 Gal. HEPA Filter **Backpack Dust Extractor, AWS™ Capable** 

Gross Container Size	.5 gal.
Air Flow Rate	64 CFM
Static Water Lift	44"
Continuous Use (max, in minutes)	62 min.
Battery	2X 18V LXT® Lithium-Ion



DCF300Z

#### 18V LXT® 13" Job Site Fan

Voltage	18V
AC Adapter	Yes
Run Time (max. in hours)	5.7
Speed Settings	3
Battery	18V LXT® Lithium-Ion



#### DCF201Z

#### 18V LXT® Job Site Fan

Voltage	18V
AC Adapter	Yes
Run Time (max. in hours)	5.5
Speed Settings	2
Battery	18V LXT® Lithium-Ion



<u>LXT.</u>

Tool only, battery & charger not included

#### DCF102Z

#### 18V LXT® 7-1/8" Fan

Voltage	18V
AC Adapter	Yes
Run Time (max. in hours)	21
Speed Settings	3
Battery	18V LXT® Lithium-Ion





#### DCM500Z 18V LXT® Cordless/Corded Coffee Maker

Battery	18V LXT® Lithium-Ion
Dimensions (LxWxH)	8-3/4" x 4-1/2" x 8-3/8"
Net Weight (with battery)	3.7 lbs.
Shipping Weight	4.4 lbs.
ower Type	Corded and Cordless Operation





LXT CXT Bluetooth

Tool only, battery & charger not included

#### XRM06B

## 18V LXT® / 12V max CXT® Bluetooth® Job Site Radio

W-H	70.401
Voltage	7.2-18V
Digital Tuner	FM/AM
Auxiliary Port	Yes
Bluetooth®	Yes
MP3 Compatible	Yes



Tool only battery & charger not included

#### 18V LXT® Job Site Radio

XRM05W

LXT

Voltage	7.2-18V
Shipping Weight	10.8 lbs.
UPC Code	088381-817707
Digital Tuner	FM/AM
Auxiliary Port	Yes



battery & charger not included LXT

#### 18V LXT® Job Site Radio

XRM05

Voltage	7.2-18V
Digital Tuner	FM/AM
Auxiliary Port	Yes
Bluetooth®	No
MP3 Compatible	Yes



**LXT CXT B** Bluetooth

XRM08B

#### 18V LXT® / 12V max CXT® Bluetooth® Job Site Speaker

Voltage	12-18V
USB Power Port	1
Auxiliary Port	Yes
Bluetooth®	Yes
MP3 Compatible	Yes



#### LIGHTING



Tool only, battery & charger not included

Tool only, battery & charger not included

Tool only, battery &

charger not included

36

300

12 I FD

14-1/4"

18V LXT® Lithium-Ion

#### 18V LXT® Cordless/Corded L.E.D. Flood Light

Run Time (max. in hours)	17
Battery	18V LXT® Lithium-Ion
Lumens	750
Bulb	20 LED
Overall Length	8-3/8"



#### 18V LXT® L.E.D. Headlamp

Run Time (max. in hours)	33
Battery	18V LXT® Lithium-Ion
Lumens	100
Bulb	1 LED
Overall Length	2-13/16"



Tool only, battery & charger not included

Tool only, battery & charger not included

40 18V LXT® Lithium-Ion

> 240 12 LED

> > 15"

#### 18V LXT® L.E.D. Flashlight

LXT

**DML802** 

Run Time (max. in hours)	23
Battery	18V LXT® Lithium-Ion
Lumens	160
Bulb	1 LED
Overall Length	10-3/4"
•	0



Tool only, battery & charger not included

battery 8 charger not included

#### DML185

LXT

#### 18V LXT® Xenon Flashlight

Run Time (max. in hours)	7.5
Battery	18V LXT® Lithium-Ion
Lumens	180
Bulb	Xenon
Overall Length	11-1/8"



LXT

#### **DML806**

#### 18V LXT® L.E.D. Lantern/Flashlight

Run Time (max. in hours)	59
Battery	18V LXT® Lithium-Ion
Lumens	240
Bulb	12 LED
Overall Length	14-3/8"



**DML808** 

#### 18V LXT® Adjustable Beam L.E.D. Flashlight

Run Time (max. in hours)	23
Battery	18V LXT® Lithium-Ion
Lumens	200
Bulb	1 LED
Overall Length	11-3/4"



Tool only, battery & charger not included

LXT

Battery Lumens

Bulb Overall Length

**DML801** 

Run Time (max. in hours)

18V LXT® L.E.D. Flashlight

#### 18V LXT® L.E.D. Flashlight

SMALL

MEDIUM

LARGE

X-LARGE

18V LXT® Heated Jacket

DCJ205Z2XL 2X-LARGE

DCJ205Z3XL 3X-LARGE

DCJ205Z

LXT

LXLM01

**JACKETS** 

DCJ205ZS

DCJ205ZM

DC.120571

DC.12057XI

<u>LXT</u>

Heat Settings

Number of Pockets

USB Power Port Net Weight (with battery)

Battery

Run Time (max. in hours)	82.5
Battery	18V LXT® Lithium-Ion
Lumens	500
Bulb	6 LED
Overall Length	5-7/8"



<u>LXT</u>

#### Jacket only, battery & charger not included



DUUZ	1002	
18V LXT®	<b>High Visibility Heated Jack</b>	æt

Heat Settings	High-Medium-Low
Battery	18V LXT® Lithium-Ion
Number of Pockets	5 (including battery pocket)
USB Power Port	1
Net Weight (with battery)	3.8 lbs.



Jacket only, battery & charger not included

#### DCJ201Z

#### 18V LXT® Mossy Oak® Heated Jacket

Heat Settings	High-Medium-Low
Battery	18V LXT® Lithium-lor
Number of Pockets	5 (including battery pocket
USB Power Port	1
Zip-off Sleeves	Yes



18V LXT® L.E.D. Lantern/Flashlight

<u>LXT.</u>

LXT

Battery

Lumens

Overall Length

Bulb

**DML807** 

Run Time (max. in hours)

Jacket only, battery & charger not included



#### 18V LXT® UV Resistant Fan Jacket

Fan Settings	High-Medium-Low
USB Power Port	1
Number of Pockets	5 (including battery pocket)
Battery	18V LXT® Lithium-Ion
Net Weight (with battery)	3.3 lbs.

DF.13047S SMALL DFJ304ZM MEDIUM DF.130471 LARGE DFJ304ZXL X-LARGE DFJ304Z2XL 2X-LARGE DFJ304Z3XL 3X-LARGE

High-Medium-Low

3.8 lbs.

18V I XT® I ithium-lon

5 (including battery pocket)

Jacket only, battery & charger not included

<u>LXT</u> Jacket only, battery & charger not included

DFJ304Z

#### 18V LXT® Cotton Fan Jacket

Fan Settings	High-Medium-Low
USB Power Port	1
Number of Pockets	5 (including battery pocket)
Battery	18V LXT® Lithium-Ion
Net Weight (with battery)	3.3 lbs.

DCV200ZS SMALL DCV200ZM MEDIUM DCV20071 LARGE DCV200ZXL X-LARGE DCV200Z2XL 2X-LARGE DCV200Z3XL 3X-LARGE

<u>LXT</u>

#### Vest only, battery & charger not included DCV200Z

#### 18V LXT® Heated Vest

Heat Settings	High-Medium-Low	
Battery	18V LXT® Lithium-Ion	
Number of Pockets	5 (including battery pocket)	
USB Power Port	1	
Net Weight (with battery)	3.8 lbs.	









**CONTROL** 3 heat settings (high / medium / low) for precise heating control DCJ206Z shown



#### 18V LITHIUM-ION BATTERIES

#### LXT

BL1860B (1-Pack) BL1860B-2 (2-Pack)



#### 18V LXT® Lithium-Ion 6.0Ah Battery

- Integrated L.E.D. battery charge level indicator allows user to monitor battery charge
- · Provides up to 2X more run time per charge compared to BI 1830
- · Reaches full charge in 55 minutes or less



#### LXT

BL1850B (1-Pack) BL1850B-2 (2-Pack)





#### 18V LXT® Lithium-Ion 5.0Ah Battery

- Integrated L.E.D. battery charge level indicator allows user to monitor battery charge
- Provides up to 65% more run time per charge compared
- · Reaches full charge in 45 minutes or less



#### LXT

BL1840B (1-Pack) BL1840B-2 (2-Pack)





#### 18V LXT® Lithium-Ion 4.0Ah Battery

- Integrated L.E.D. battery charge level indicator allows user to monitor battery charge
- Provides up to 35% more run time per charge compared
- · Reaches full charge in 40 minutes or less



#### LXT

**BL1830B** (1-Pack)

BL1830B-2 (2-Pack BL1830B-10 (10-)







#### 18V LXT® Lithium-Ion 3.0Ah Battery

- Integrated L.E.D. battery charge level indicator allows user to monitor battery charge
- Reaches full charge in 30 minutes or less
- Compatible only with Star Protection tools, indicated by the Star Symbol™ and/or Yellow Battery Receiver under the tool



#### LXT

BL1820B (1-Pack)





### 18V LXT® Lithium-Ion Compact 2.0Ah Battery

- Integrated L.E.D. battery charge level indicator allows user to monitor battery charge
- Provides up to 50% more run time per charge compared to BL1815
- · Reaches full charge in 25 minutes or less

#### 18V LITHIUM-ION CHARGERS

#### LXT

#### DC18RC

#### 18V LXT® Lithium-Ion Rapid Optimum Charger

- Charges an 18V LXT® Lithium-Ion 3.0Ah battery in only 30 minutes
- Charges an 18V LXT® Lithium-Ion 4.0Ah battery in only 40 minutes
- $\bullet$  Charges an 18V LXT  $\!\!^{\circ}$  Lithium-lon 5.0Ah battery in only 45 minutes
- Charges an 18V LXT® Lithium-Ion 6.0Ah battery in only 55 minutes
- Charges an 18V LXT® Compact Lithium-Ion 2.0Ah battery in only 25 minutes
- The Makita Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimize battery life

#### LXT

#### DC18RD

#### 18V LXT® Lithium-Ion Dual Port Charger

- Charges two (2) 18V Compact Lithium-lon 2.0Ah batteries in only 25 minutes
- Charges two (2) 18V LXT® Lithium-lon 3.0Ah batteries in only 30 minutes
- Charges two (2)18V LXT® Lithium-lon 4.0Ah batteries in only 40 minutes
- Charges two (2) 18V LXT® Lithium-Ion 5.0Ah batteries in only
- Charges two (2) 18V LXT® Lithium-Ion 6.0Ah batteries in only 55 minutes



#### DC18SF

#### 18V LXT® Lithium-Ion 4-Port Charger

- Charges 2 18V LXT® 3.0Ah batteries in 60 minutes and 4 18V LXT® 3.0Ah batteries in 120 minutes
- Charges 2 18V LXT® Compact 2.0Ah batteries in 30 minutes and 4 18V LXT® Compact 2.0Ah batteries in 60 minutes
- · Charger indicators provide updates on charging progress or charging status



#### LXT

#### DC18SE

#### 18V LXT® Optimum Automotive Charger

- · Compatible with 12-volt DC outlets found in most autos
- Charges Makita 18V LXT® Lithium-Ion slide-style
- · Durable and compact design



#### 18V LITHIUM-ION POWER SOURCE

#### LXT USB



### ADP05

#### **18V LXT® Cordless Power Source (Power** Source Only)

- . Charges up to 2 USB compatible electronic devices where AC power is not available
- 2 USB ports provide quick and easy charging
- 2.1A output from each USB port, 4.2A total output when both USB ports are connected



#### SYNC LOCK

#### LXT

### 18V LXT® Sync Lock® Battery Terminal

- Disables operation and charging of Makita 18V LXT® Batteries by programming a lock-out schedule (preset day, time, and calendar)
- Software enabled system to limit distractions on job sites that may be caused by mobile devices
- · Pass code protected to ensure only authorized users can manipulate the system







### 12V max CXT® LITHIUM-ION

CXT® is the next generation in 12-volt max cordless tools. 12V max CXT® gives users a more compact solution with more comfort and more capacity. The slide style lithium-ion batteries provide superior ergonomics and comfort, and allow go-to tools like the impact driver and drills to stand up on their own for added convenience. Select 12V max CXT® tools are equipped with efficient brushless motors for longer run time, increased power and speed, and longer tool life. For even longer run time, the expanding 12V max CXT® platform includes an efficient 4.0Ah battery.

## SUPERIOR ERGONOMICS

PRECISE FEEL & CONTROL

## **ULTRA-COMPACT DESIGN**

**WORK WITH LESS FATIGUE** 

#### ADVANCED LITHIUM-ION BATTERY

**EFFICIENT POWER DELIVERY** 

#### MAKITA-BUILT MOTORS\*

**UP TO 50% LONGER MOTOR LIFE\*** 

\*Brushless motors available in select 12V max CXT® tools \*\*Compared to Makita® cordless motors with brushes



CXT.

#### CT409R

12V max CXT® 3/8" Driver-Drill (FD052)
12V max CXT® Impact Driver (DT032)
12V max CXT® LE.D. Flashlight (ML103)
12V max CXT® Compact Job Site Radio (RM02)
(2) 12V max CXT® Lithium-Ion 2.0Ah Battery (BL1021B)
12V max CXT® Lithium-Ion Charger (DC10WD)



#### CT410

12V max CXT® 3/8" Driver-Drill (FD052)
12V max CXT® Impact Driver (DT032)
12V max CXT® 3/8" Impact Wrench (WT022)
12V max CXT® L.E.D. Flashlight (ML103)
12V max CXT® Ltihium-lon Charger (DC10WD)
14" Contractor Tool Bag (831253-8)
(2) 12V max CXT® 1.5Ah batteries



#### CT324

12V max CXT® Impact Driver (DT032) 12V max CXT® 3/8" Impact Wrench (WT022) 12V max CXT® L.E.D. Flashlight (ML103) 12V max CXT® Lithium-Ion Charger (DC10WD) 14" Contractor Tool Bag (831253-8) (2) 12V max CXT® 1.5Ah Datteries (BL1016)



#### <sup>км</sup> СТ323

12V max CXT® 3/8" Driver-Drill (FD05Z)
12V max CXT® 3/8" Impact Wrench (WT02Z)
12V max CXT® L.E.D. Flashlight (ML103)
12V max CXT® L.tihium-Ion Charger (DC10WD)
14" Contractor Tool Bag (831253-8)
(2) 12V max CXT® 1.5Ah batteries



#### CT321RX

12V max CXT® 3/8" Driver-Drill (FD052)
12V max CXT® Impact Driver (DT032)
12V max CXT® L.E.O. Flashlight (ML103)
(2) 12V max CXT® Lithium-lon 2.0Ah Battery (BL1021B)
12V max CXT® Lithium-lon Charger (DC10WD)



#### **CT227R**

12V max CXT® 3/8" Driver-Drill (FD05Z) 12V max CXT® 3-3/8" Circular Saw (SH02Z) (2) 12V max CXT® Lithium-Ion 2.0Ah Battery (BL1021B) 12V max CXT® Lithium-Ion Charger (DC10WD)



#### CT226RX

12V max CXT® 3/8" Driver-Drill (FD05Z) 12V max CXT® Impact Driver (DT03Z) (2) 12V max CXT® Lithium-Ion 2.0Ah Battery (BL1021B) 12V max CXT® Lithium-Ion Charger (DC10WD)



#### CT226

12V max CXT® 3/8" Driver-Drill (FD05Z)
12V max CXT® Impact Driver (DT03Z)
12V max CXT® Lithium-lon Charger (DC10WD)
14" Contractor Tool Bag (831253-8)
(2) 12V max CXT® 1.5Ah batteries



CXT.BRUSHLESS

PH05R1

#### 12V max CXT® Brushless 3/8" Hammer Driver-Drill Kit

Steel (3/8"), Wood (1-1/8"), Masonry (5/16") Canacities: No Load Speed (var. 2 spd) 0 - 450 / 0 - 1,500 RPM Blows Per Minute (2 speed) 0 - 6,750 / 0 - 22,500 BPM Maximum Torque (in.lbs./N•m) 280 in.lbs./N∙m 12V max CXT® Lithium-Ion



PHO4R1

### 12V max CXT® 3/8" Hammer Driver-

Steel (3/8"), Wood (13/16"), Masonry (5-1/16") Canacities: No Load Speed (var. 2 spd) 0 - 450 / 0 - 1,700 RPM Blows Per Minute (2 speed) 0 - 6,750 / 0 - 25,500 BPM Maximum Torque (in.lbs./N•m) 250 in.lbs./28N•m 12V max CXT® Lithium-Ion

**Drill Kit** 



FD07R1

### 12V max CXT® Brushless 3/8" Driver-

Capacities: Steel (3/8"), Wood (1-1/8"), Masonry (0 - 450 / 0 - 1,500 RPM) Maximum Torque (in.lbs./Nom) 280 in.lbs./N•m Battery 12V max CXT® Lithium-Ion Overall Length 6-1/16 Net Weight (with battery) 2.3 lbs.



FD05R1 12V max CXT® 3/8" Driver-Drill Kit

Capacities:	Steel (3/8"), Wood (13/16")
No Load Speed (var. 2 spd)	0 - 450 / 0 - 1,700 RPM
Maximum Torque (in.lbs./N•m)	250 in.lbs./28N•m



CXT BRUSHLESS

DT04R1 DT04Z

#### 12V max CXT® Brushless Impact Driver Kit

Hex Shank 0 - 1.300 / 0 - 3.000 RPM No Load Speed (var. 2 spd) 0 - 1,600 / 0 - 3,900 IPM Impacts Per Minute (var. 2 spd.) Maximum Torque (in.lbs./N+m) 1,200 in.lbs./135N•m 12V max CXT® Lithium-Ion



DT03R1

#### 12V max CXT® Impact Driver Kit

Hex Shank 1/4" No Load Speed (variable speed) 0 - 2.600 RPM 0 - 3,500 IPM Impacts Per Minute (variable speed) Maximum Torque (in.lbs./N•m) 970 in.lbs./110N•m 12V max CXT® Lithium-Ion

DT03Z



FD06R1 FD06Z

#### 12V max CXT® 1/4" Hex Driver-Drill Kit

Capacities: Steel (3/8"), Wood (13/16") Hex Shank 1/4" 0 - 450 / 0 - 1,700 RPM No Load Speed (var. 2 spd) 12V max CXT® Lithium-Ion Battery Overall Length 6-3/16"



CXT ADO3R1

Battery

AD03Z

12V max CXT® Lithium-Ion

#### 12V max CXT® 3/8" Right Angle Drill Kit

Capacities: Steel (3/8"), Wood (1/2") No Load Speed (variable speed) 0 - 1.100 RPM 245 in.lbs./27N•m Maximum Torque (in.lbs./N•m) 12V max CXT® Lithium-Ion Battery 12-3/8" Overall Length



CXT



AD04Z

## 12V max CXT® 3/8" Right Angle Drill Kit

Capacities: Steel (3/8"), Wood (1/2") No Load Speed (variable speed) 0 - 1.100 RPM 245 in.lbs./27N•m Maximum Torque (in.lbs./N•m) Battery 12V max CXT® Lithium-lon Overall Length 12-3/8"



CXT

WT02R1 WT02Z 12V max CXT® 3/8" Impact Wrench Kit

Square Drive	3/8"
No Load Speed (variable speed)	0 - 2,600 RPM
Impacts Per Minute (variable speed)	0 - 3,200 IPM
Maximum Torque (ft.lbs./N•m)	103 ft.lbs./139 N•m
Nut-Busting Torque (ft.lbs./Nom)	200 ft.lbs./270 N•m



CXT

LT01R1 LT01Z

12V max CXT® Angle Impact Driver Kit	

Hex Shank 1/4" No Load Speed (variable speed) 0 - 2,000 RPM Impacts Per Minute (variable speed) 0 - 3,000 IPM Maximum Torque (in.lbs./Nom) 530 in.lbs./60N•m 12V max CXT® Lithium-Ion Battery



CXT

LT02R1

12V max CXT® 3/8" Angle Impact Wrench Kit

Square Drive 3/8" No Load Speed (variable speed) 0 - 2,000 RPM Impacts Per Minute (variable speed) 0 - 3,000 IPM Maximum Torque (ft.lbs./N•m) 44 ft.lbs./60 Nem 12V max CXT® Lithium-Ion

### 12V max CXT® ADHESIVE GUNS



GC01ZC

#### 12V max CXT® 29 oz. Caulk and **Adhesive Gun**

29 oz. Capacity (caulk or sealants) Dispense Force 1,100 lbs Inches Per Minute (variable speed) 0 - 66 IPM Speed Settings 12V max CXT® Lithium-Ion Battery



GC01ZB

#### 12V max CXT® 20 oz. Caulk and **Adhesive Gun**

Capacity (caulk or sealants) 20 oz. Dispense Force 1,100 lbs Inches Per Minute (variable speed 0 - 66 IPM Speed Settings 18V LXT® Lithium-lon Battery



CXT

**Adhesive Gun** 

#### GC01ZA 12V max CXT® 10 oz. Caulk and

Capacity (caulk or sealants) 10 oz. Dispense Force 1,100 lbs. Inches Per Minute (variable speed) 0 - 66 IPM Speed Settings 12V max CXT® Lithium-Ion

### 12V max CXT® CIRCULAR SAW



CXT

SH02R1 SH02Z

### 12V max CXT® 3-3/8" Circular Saw Kit

Blade Diameter 3-3/8" Arbor (mm) 15 mm Max. Cutting Capaciti 90° (1"), 45° (5/8") No Load Speed 1.500 RPM 12V max CXT® Lithium-lon Battery



## 12V max CXT® JIG /RECIPRO SAWS



#### CXT BRUSHLESS

### 12V max CXT® Brushless Barrel Grip

Jig Saw Kit	
Length of Stroke	7/8"
Max. Cutting Capacities (90°): Aluminum (13/16"), Mil	d Steel (3/8"), Wood (3-1/2")
Strokes Per Minute (variable speed)	800 - 3,000 SPM
Blade Shank	"T" Tang
Battery	12V max CXT® Lithium-Ion



CXT.BRUSHLESS

VJ06R1J

#### 12V max CXT® Brushless Top Handle Jig Saw Kit

Length of Stroke	7/8"
Max. Cutting Capacities (90°): Aluminum (13/16"), Mil	d Steel (3/8"), Wood (3-1/2")
Strokes Per Minute (variable speed)	800 - 3,000 SPM
Blade Shank	"T" Tang
Battery	12V max CXT® Lithium-Ion



CXT

12V max CXT® Jig Saw Kit

VJ04R1

Length of Stroke	11/16"
Max. Cutting Capacities (90° Aluminum (5/32	): ""), Mild Steel (1/16"), Wood (2-9/16")
Strokes Per Minute	2,900 SPM
Blade Shank	"T" Tang
Battery	12V max CXT® Lithium-Ion



CXT

**RJ03R1** 12V max CXT® Recipro Saw Kit

Length of Stroke	1/2"
Max. Cutting Capacities:	Wood (2"), Pipe (2")
Strokes Per Minute (variable speed)	0 - 3,300 SPM
Battery	12V max CXT® Lithium-Ion

## 12V max CXT® SAW / MULTI-CUTTER



CC02R1 CC02Z

### 12V max CXT® 3-3/8" Tile/Glass Saw

Blade Diameter	3-3/8"
Arbor (mm)	15 mm
Max. Cutting Capacities:	90° (1"), 45° (5/8")
No Load Speed	1,600 RPM
Battery	12V max CXT® Lithium-Ion



PC01R3 PC01Z 12V max CXT® Multi-Cutter Kit

	 •	 	

Max. Cutting Capacity	1/4"
No Load Speed	300 RPM
Battery	12V max CXT® Lithium-Ion
Overall Length	10-3/4"
Net Weight (with battery)	1.6 lbs.



RH02R1 RH02Z

### 12V max CXT® 9/16" Rotary Hammer

Max. Capacity (concrete drilling)	9/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy:	1 J / .73 ft.lbs.
Vibration (m/s²)	6.5
No Load Speed (variable speed)	0 - 850 RPM



CXT BRUSHLESS RH01R1

Overall Length

RH01Z 12V max CXT® Brushless 5/8" Rotary Hammer Kit

Max. Capacity (concrete drilling)	5/8"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy:	1.1 J / .81 ft.lbs.
Vibration (m/s²)	7.5
No Load Speed (variable speed)	0 - 680 RPM

## 12V max CXT® NAILER / MULTI-TOOL



TP03Z

#### 12V max CXT® Pin Nailer, 23 Ga.

Max. nail/fastener length	1-3/8" (23 ga.)
Maximum Magazine Capacity	120
Battery	12V max CXT® Lithium-Ion
Overall Length	9-1/8"
Net Weight (with battery)	4 lbs.



MT01R1 MT01Z

#### 12V max CXT® Multi-Tool Kit

Oscillations Per Minute	6,000 - 20,000 OPM
Oscillation Angle	3.2°
Battery	12V max CXT® Lithium-Ion
Overall Length	10-7/8"
Net Weight (with battery)	2.4 lbs.



#### 12V max CXT® Trimmer w/ Plastic Blade

Cutting Capacity (diameter)	9"
No Load Speed	10,000 RPM
Battery	12V max CXT® Lithium-Ion
Overall Length	46-3/4"
Net Weight (with battery)	4.2 lbs.



12V max CXT® String Trimmer

Cutting Capacity (diameter)	10-1/4"
No Load Speed	9,000 RPM
Battery	12V max CXT® Lithium-Ion
Overall Length	46-3/4"
Net Weight (with battery)	4.2 lbs.



Tool only, battery & charger not included CXT

#### HU06Z

#### 12V max CXT® Hedge Trimmer

Blade Length	7-7/8"
Strokes Per Minute	2,500 SPM
Battery	12V max CXT® Lithium-Ion
Overall Length	19-7/8"
Net Weight (with battery)	3.3 lbs.



Tool only, battery & charger not included CXT

#### MU04Z 12V max CXT® Grass Shear

Cutting Capacity (width)	6-5/16"
Depth Adjustment Range	9/32", 25/32", 1"
Strokes Per Minute	2,500 SPM
Battery	12V max CXT® Lithium-Ion
Overall Length	13"



#### 12V max CXT® Vacuum

Capacity (pint)	1.26 pint
Continuous Use (max, in minutes)	33 min.
Battery	12V max CXT® Lithium-Ion
Overall Length	18"
Net Weight (with battery)	2.3 lbs.



#### 12V max CXT® Vacuum

Capacity (pint)	1.26 pint
Continuous Use (max, in minutes)	21 min.
Battery	12V max CXT® Lithium-Ion
Overall Length	18"
Net Weight (with battery)	2.2 lbs.

### 12V max CXT® SPEAKER / FAN



LXT CXT 8 Bluetooth

Tool only, battery & charger not included

## CXT

#### 12V max CXT® 7-1/8" Fan

Voltage	12V
AC Adapter	Yes
Run Time (max. in hours)	10.5
Speed Settings	3
Battery	12V max CXT® Lithium-Ion

Tool only, battery & charger not included

CXT

Voltage

Digital Tuner

**Auxiliary Port** 

Bluetooth® MP3 Compatible

### 12V max CXT® RADIO / INFLATOR



12V max CXT® Compact Job Site Radio

Tool only, battery & charger not included

#### MP100DWRX1

12V

FM/AM

Yes

CXT

#### 12V max CXT® Inflator Kit

Voltage	12V
Battery	12V max CXT® Lithium-Ion
Power Type	Cordless
Max Air Pressure (PSI)	120
Display back light	Yes

#### 18V LXT® / 12V max CXT® Bluetooth® **Job Site Speaker**

Voltage	12-18V
USB Power Port	1
Auxiliary Port	Yes
Bluetooth®	Yes
MP3 Compatible	Yes

### CF100DZ

CJ102DZM

CJ102DZL

CJ102DZXL

CXT

CJ102DZ

CJ102DZ3XL 3X-LARGE

MEDIUM

LARGE

X-LARGE CJ102DZ2XL 2X-LARGE

12V max CXT® Heated Jacket

/oltage	12V
AC Adapter	Yes
Run Time (max. in hours)	10.5
Speed Settings	3
Battery	12V max CXT® Lithium-Ion

#### 7.2V LITHIUM-ION





### 7/2V

#### DF012DSE

### 7.2V Lithium-Ion 1/4" Hex Driver-Drill

3/16"
3/10
1/4"
200/650 RPM
71 in.lbs./8N•m



TD022DSE

#### 7.2V Lithium-Ion Impact Driver Kit

Hex Shank	1/4"
No Load Speed (variable speed)	0 - 2,450 RPM
Impacts Per Minute (variable speed)	0 - 3,000 IPM
Maximum Torque (in.lbs./N•m)	220 in.lbs./25N•m
Battery	7.2V Compact Lithium-Ion

12V max CXT®

LIGHTING / JACKET

Tool only, battery & charger not included CXT ML106

#### 12V max CXT® Adjustable Beam L.E.D. **Flashlight**

Lumens         190           Bulb         1 LEC	Run Time (max. in hours)	12
Bulb 1 LEG	Battery	12V max CXT® Lithium-Ion
	Lumens	190
Overall Length 10-5/8	Bulb	1 LED
o voran zongan	Overall Length	10-5/8"



Jacket only, battery & charger not included



### **DRIVING INNOVATION TOUR™**

The Driving Innovation Tour™ is an interactive tool demonstration on wheels. The Makita® fleet of fully-custom vehicles is traveling across America, bringing users ONE SYSTEM and the world's largest 18V lithium-ion cordless tool system. Each Tour event features over 100 LXT tools and power equipment with interactive displays and hands-on demonstrations focusing on construction trades, dust management, landscaping, and more. Driving Innovation delivers high-energy events and a 360-degree experience with the very latest in cordless innovation as well as sweepstakes, giveaways, and sales promotions. Experience the Makita® Advantage at a Driving Innovation Tour<sup>™</sup> event.

#### **DRIVING INNOVATION TOUR FINDER**



search where you can experience the Makita® Advantage at a Driving Innovation Tour Event.



#### 12V max CXT® LITHIUM-ION

#### **BATTERIES**

#### CXT

BL1041B







### 12V max CXT® Lithium-Ion 4.0Ah Battery

- Lithium-lon battery delivers longer run time and lower self-discharge
- Features an integrated L.E.D. battery charge level indicator
- Compact design for less weight
- Part of the expanding 12V max CXT® tool series, combining performance with superior ergonomics in a compact size

\*With DC10WB



#### CXT

BL1021B







#### 12V max CXT® Lithium-Ion 2.0Ah Battery

- Lithium-lon battery delivers longer run time and lower self-discharge
- Features an integrated L.E.D. battery charge level indicator
- . Compact design for less weight
- Part of the expanding 12V max CXT® tool series, combining performance with superior ergonomics in a compact size





#### CXT

#### DC10SB

#### 12V max CXT® Lithium-Ion Rapid Optimum Charger

- Charges a 12V max CXT® Lithium-lon 1.5Ah battery in only 22 minutes
- Charges a 12V max CXT® Lithium-Ion 2.0Ah battery in only
- Charges a 12V max CXT® Lithium-lon 4.0Ah battery in only 60 minutes
- Charging status lights indicate the time it will take to charge a CXT® battery



#### CXT

#### DC10WD

#### 12V max CXT® Lithium-Ion Charger

- Charges a 12V max CXT® Lithium-lon 1.5Ah battery in only 50 minutes
- Charges a 12V max CXT® Lithium-Ion 2.0Ah battery in only
- Charges a 12V max CXT® Lithium-Ion 4.0Ah battery in only
- Charging status lights indicate the time it will take to charge a CXT® battery



#### POWER SOURCE





#### ADP06

#### 12V max CXT® Power Source (Power Source Only)

- Charges 1 USB compatible electronic device where AC power is not available
- . USB port provides quick and easy charging
- On-Off switch activates or deactivates power output



#### 12V max & 7.2V LITHIUM-ION

#### **BATTERIES**







#### 12V max Lithium-Ion Battery

· Lithium-Ion battery delivers longer run time and lower





BL7010





#### 7.2V Lithium-Ion Battery

60-minute charge time when used with Makita's Lithium-lon Charger (DC10WB)





#### DC10WB

#### 7.2V - 12V max Lithium-Ion Charger

- Charges Makita 7.2V Lithium-lon and 12V max Lithium-lon batteries
- 50 minute charge time
- . Compact size for easy storage and portability.

Also charges 10.8V Lithium-Ion batteries



#### 36V LITHIUM-ION



BL3626







#### 36V Lithium-Ion 2.6Ah Battery

30-minute charge time when used with Makita's Rapid Optimum Charger





BL3622A





#### **36V Lithium-Ion Battery**

60-minute charge time when used with Makita's Rapid Optimum Charger (DC36WA)






#### DC36WA

#### **36V Charger**

- Charges Makita 36V Lithium-Ion Battery (BL3622A) in
- Compact design is ideal for job site portability and storage
- Compatible with 36V Lithium-lon battery (BL3622A and BL3626)





CXT LASER

Line accuracy (at 33')

Line beam direction

Working range (line)

Working Range with Detect

SK105GDNAX

**Green Beam Laser Kit** 







Includes 2.0.



#### 12V max CXT® Self-Leveling Cross-Line/4-Point Green Beam Laser Kit

	1011 01770 1111 1
Battery	12V max CXT® Lithium-Ion
Line accuracy (at 33')	+/- 1/8"
Point beam direction	4 point (up, down, left, right)
Line beam direction	2 line (horizontal, vertical)
Working range (line)	115'









#### 12V max CXT® Self-Leveling Cross-Line/A-Point Red Ream La

Line/4 i oiiit ilou b	Journ Euser Kit
Battery	12V max CXT® Lithium-Ion
Line accuracy (at 33')	+/- 1/8"
Point beam direction	4 point (up, down, left, right)
Line beam direction	2 line (horizontal, vertical)
Working range (line)	821



12V max CXT® Self-Leveling Cross-Line





SK105GDZ

12V max CXT® Lithium-Ion

2 line (horizontal, vertical)



+/- 1/8"

115'

262'





Includes 2.0 ATTERY SK105DNAX SK105DZ

### 12V max CXT® Self-Leveling Cross-Line

nea Beam Easer	
Battery	12V max CXT® Lithium-Ion
Line accuracy (at 33')	+/- 1/8"
Line beam direction	2 line (horizontal, vertical)
Working range (line)	82'
Working Range with Detector	262'





#### 12V max CXT® Self-Leveling Multi-Line/ **Point Green Beam Laser**

Battery	12V max CXT® Lithium-Ion
Line accuracy (at 33')	+/- 1/16"
Point beam direction	1 point (down)
Line beam direction	1 line (horizontal) 2 (vertical)
Working range (line)	50'



#### SK103PZ

#### **Self-Leveling Combination Cross-Line/ Point Laser**

Power supply (AA battery)	3
Line accuracy (at 33')	+/- 1/8"
Point beam direction	4 point (up, down, left, right)
Line beam direction	2 line (horizontal, vertical)
Working range (line)	50'

**DEMOLITION HAMMERS** 



**Cross-Line Laser** 

#### SK104Z **Self-Leveling Horizontal/Vertical**

Power supply (AA battery) Line accuracy (at 33') +/- 1/8" 2 line (horizontal, vertical) Line beam direction Working range (line) 50 Laser diode Class II, 635 nm





#### LD080P

#### Laser Distance Measure, 262'

Power supply (AAA battery)	2
Line accuracy (at 33')	+/- 1/16"
Working range	262'
Smallest unit of measure	1/32"
Laser diode	Class II, 635 nm



CAUTION

#### LD050P

#### Laser Distance Measure, 164'

Power supply (AAA battery)	2
Line accuracy (at 33')	+/- 5/64"
Working range	164'
Smallest unit of measure	1/16"
Laser diode	Class II, 635 nm





#### 70 lb. Advanced AVT® Breaker Hammer

AMPS	15
Blows Per Minute	870 BPM
Impact Energy:	53.9 ft.lbs. / 72.8 J
Vibration Control	Yes
Vibration (m/s <sup>2</sup> )	6.5



#### HM1810X3

#### 70 lb. AVT® Breaker Hammer

AMPS	15
Blows Per Minute	1,100 BPM
Impact Energy:	46.5 ft.lbs. / 63 J
Vibration Control	Yes
Vibration (m/s2)	9







#### HM1317CB

#### 42 lb. AVT® Demolition Hammer

AMPS	14
Blows Per Minute (variable speed)	730 - 1,450 BPM
Impact Energy:	25.7 ft.lbs. / 34.9 J
Vibration Control	Yes
Vibration (m/s²)	7





#### HM1307CB

#### 35 lb. Demolition Hammer

AMPS	14
Blows Per Minute (variable speed)	730 - 1,450 BPM
Impact Energy:	25.7 ft.lbs. / 34.9 J
Vibration Control	No
Vibration (m/s²)	12



### HM1214C

#### 27 lb. AVT® Demolition Hammer

AMPS	14
Blows Per Minute (variable speed)	950 - 1,900 BPM
Impact Energy:	19 ft.lbs. / 25.7 J
Vibration Control	Yes
Vibration (m/s²)	8



### HM1203C

#### 20 lb. Demolition Hammer

AMPS	14
Blows Per Minute (variable speed)	950 - 1,900 BPM
Impact Energy:	18.8 ft.lbs. / 25.5 J
Vibration Control	No
Vibration (m/s²)	15.5





### HM1211B

#### 20 lb. Demolition Hammer

AMPS	10
Blows Per Minute	2,000 BPM
Impact Energy:	10.5 ft.lbs. / 14.2 J
Vibration Control	No
Vibration (m/s²)	25



#### **DEMOLITION HAMMERS**





#### HM1111C

#### 17 lb. AVT® Demolition Hammer

AMPS	14
Blows Per Minute (variable speed)	1,100 - 2,650 BPM
Impact Energy:	12.7 ft.lbs. / 17.2 J
Vibration Control	Yes
Vibration (m/s²)	8



#### HM0870C

#### 11 lb. Demolition Hammer

AMPS	10
Blows Per Minute (variable speed)	1,100 - 2,650 BPM
Impact Energy:	8.4 ft.lbs. / 11.4 J
Vibration Control	No
Vibration (m/s²)	11



#### **HM0810B**

#### 13 lb. Demolition Hammer

AMPS	8.3
AWPS	0.3
Blows Per Minute	2,900 BPM
Impact Energy:	5.6 ft.lbs. / 7.6 J
Vibration Control	No
Vibration (m/s²)	15



#### HK1810

#### **Power Scraper**

AMPS	4.5
Blows Per Minute (variable speed)	0 - 3,200 BPM
Impact Energy:	2.9 ft.lbs. / 3.9 J
Vibration Control	No
Vibration (m/s²)	13.5

#### **ROTARY HAMMERS**



#### HR5212C

#### 2" Advanced AVT® Rotary Hammer

AMPS	15
Max. Capacity (concrete drilling)	2"
Optimum Range (concrete drilling)	3/4" - 1-9/16"
Max. Capacity (concrete drilling w/ core bit)	6-1/4"
Impact Energy:	14 ft.lbs. / 19 J



#### HR5000

#### 2" Rotary Hammer

AMPS	11
Max. Capacity (concrete drilling)	2"
Optimum Range (concrete drilling)	5/8" - 1-3/8"
Max. Capacity (concrete drilling w/ core bit)	5-7/8"
Impact Energy:	8.7 ft.lbs. / 11.8 J



#### HR4510C

#### 1-3/4" AVT® Rotary Hammer

AMPS	13.5
Max. Capacity (concrete drilling)	1-3/4"
Optimum Range (concrete drilling)	3/4" - 1-3/8"
Max. Capacity (concrete drilling w/ core bit)	5"
Impact Energy:	9.2 ft.lbs. / 12.5 J



Advanced AVT® Anti-Vibration Technology (AVT®) with a 3-component system that sets new standards in vibration reduction, new standards in vibration reduction, with no compromise in performance. The Air Actuated Counterbalance moves counterweight pistons in the opposite direction of the drive piston to actively reduce vibration. The Vibration Absorbing Housing isolates the rear and side handle, reducing vibration for the user. And the Integrated Damper Spring is engineered to absorb impact vibrations from the drill bit vibrations from the drill bit.



#### LXT BRUSHLESS

#### XRH07PTU XRH07ZKU

## 18V X2 LXT® (36V) Brushless 1-9/16" Advanced AVT® Rotary Hammer Kit, AWS™

Max. Capacity (concrete drilling)	1-9/16"
Optimum Range (concrete drilling)	5/8" - 1-1/4"
Max. Capacity (concrete drilling w/ core bit)	4-1/8"
Impact Energy	8.4 ft.lbs. / 11.4 J
Blows Per Minute (variable speed)	1,450 - 2,900 BPM



### HR4013C

#### 1-9/16" Advanced AVT® Rotary Hammer

AMPS	11
Max. Capacity (concrete drilling)	1-9/16"
Optimum Range (concrete drilling)	5/8" - 1-1/4"
Max. Capacity (concrete drilling w/ core bit)	4-1/8"
Impact Energy:	8 4 ft lhs / 11 4 .I



#### HR4002

#### 1-9/16" Rotary Hammer

AMPS	10
Max. Capacity (concrete drilling)	1-9/16"
Optimum Range (concrete drilling)	1/2" - 1"
Max. Capacity (concrete drilling w/ core bit)	4-1/8"
Impact Energy:	4.6 ft.lbs. / 6.2 J



#### HR4041C

#### 1-9/16" Rotary Hammer

AMPS	11
Max. Capacity (concrete drilling)	1-9/16"
Optimum Range (concrete drilling)	1/2" - 1"
Max. Capacity (concrete drilling w/ core bit)	4-5/8"
Impact Energy:	9.2 J / 6.8 ft.lbs.



#### HR3210C

#### 1-1/4" AVT® Rotary Hammer

AMPS	8.2
Max. Capacity (concrete drilling)	1-1/4"
Optimum Range (concrete drilling)	1/2" - 7/8"
Max. Capacity (concrete drilling w/ core bit)	3-1/2"
Impact Energy:	4.1 ft.lbs. / 5.5 J



#### HR2811F

#### 1-1/8" Rotary Hammer

AMPS	7
Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	1/4" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	3-1/8"
Impact Energy:	2.1 ft.lbs. / 2.9 J



#### XRH10PTW XRH10ZW

## 18V X2 LXT<sup>®</sup> 36V Brushless 1-1/8" AVT<sup>®</sup> Rotary Hammer Kit, AFT<sup>®</sup>, AWS<sup>™</sup> Capable

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



### 18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer, AFT®, AWS™ Capable

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



#### W XRH11Z

#### 18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer, AFT®, AWS™ Capable

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



#### LXT BRUSHLESS

## W XRHO8PTW

#### 18V X2 LXT® 36V Brushless 1-1/8" AVT® Rotary Hammer Kit w/ HEPA Dust Extractor

•	
Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5.000 BPM



### <u>LXT BRUSHLESS</u>

XRH08PT	XRH08Z

### 18V X2 LXT® (36V) Brushless 1-1/8" AVT® Rotary Hammer Kit

Max. Capacity (concrete drilling)	1-1/8"
Optimum Range (concrete drilling)	3/16" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	2-1/8"
Impact Energy	2.3 ft.lbs. / 3.2 J
Blows Per Minute (variable speed)	0 - 5,000 BPM



LXT X2 18V + 18V 36V

(RH05PT	XRH05Z

18V X2 LXT® (36V) 1" Rotary Hammer Kit

Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 5/8"
Impact Energy	2.2 ft.lbs. / 3 J
Blows Per Minute (variable speed)	0 - 5,000 BPM
No Load Speed (variable speed)	0 - 1 250 RPM



### **AVT** HR2641

#### 1" AVT® Rotary Hammer

AMPS	8
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	1/4" - 5/8"
Max. Capacity (concrete drilling w/ core bit)	3-1/8"
Impact Energy:	2.1 ft.lbs. / 2.9 J



#### HR2661

#### 1" AVT® Rotary Hammer w/ HEPA Dust **Extractor**

AMPS	8
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	1/4" - 5/8"
Max. Hole Depth	7-7/16"
Max. Capacity (concrete drilling w/ core bit)	3-1/8"



#### HR2651

#### 1" AVT® Rotary Hammer w/ HEPA Dust **Extractor**

AMPS	7
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	1/4" - 5/8"
Max. Hole Depth	7-7/16"
Max. Capacity (concrete drilling w/ core bit)	3-1/8"



HR2631F

#### 1" AVT® Rotary Hammer

AMPS	7
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Max. Capacity (concrete drilling w/ core bit)	2-11/16"
Impact Energy:	2.1 ft.lbs. / 2.9 J



#### HR2475

#### 1" Rotary Hammer

AMPS	7
Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Max. Capacity (concrete drilling w/ core bit)	3-1/8"
Impact Energy:	2 ft.lbs. / 2.7 J



#### <u>LXT</u> BRUSHLESS

XRH011TX	XRH01ZVX
18V LXT® Brushless Kit, w/ HEPA Dust Ex	

Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Impact Energy	1.7 ft.lbs. / 2.4 J
Blows Per Minute (variable speed)	0 - 4,700 BPM
No Load Speed (variable speed)	0 - 050 PPM



#### <u>LXT</u> BRUSHLESS

XRH01T	XRH01Z
18V LXT® Brushless 1"	Rotary Hammer Kit

Max. Capacity (concrete drilling)	1"
Optimum Range (concrete drilling)	3/16" - 1/2"
Impact Energy	1.7 ft.lbs. / 2.4 J
Blows Per Minute (variable speed)	0 - 4,700 BPM
No Load Speed (variable speed)	0 - 950 RPM



XRH04T

18V LXT® 7/8" Rotary Hammer Kit

Max. Capacity (concrete drilling)	7/8"
Optimum Range (concrete drilling)	5/32" - 1/2"
Impact Energy	1.4 ft.lbs. / 1.9 J
Blows Per Minute (variable speed)	0 - 4,000 BPM
No Load Speed (variable speed)	0 - 1,200 RPM



XRH03T

XRH03Z

#### 18V LXT® 7/8" Rotary Hammer Kit

Max. Capacity (concrete drilling)	7/8"
Optimum Range (concrete drilling)	5/32" - 1/2"
Impact Energy	1.4 ft.lbs. / 1.9 J
Blows Per Minute (variable speed)	0 - 4,000 BPM
No Load Speed (variable speed)	0 - 1,200 RPM



LXT BRUSHLESS

XRH06RB XRH06ZB

#### **18V LXT® Sub-Compact Brushless** 11/16" Rotary Hammer Kit

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	.88 ft.lbs. / 1.2 J
Blows Per Minute (variable speed)	0 - 4,800 BPM
No Load Speed (variable speed)	0 - 680 RPM



<u>LXT</u> BRUSHLESS

XRH12TW XRH12ZW 18V LXT® Brushless 11/16" AVT® Rotary Hammer Kit w/ Dust Extractor, AWS™ Capable

Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Impact Energy	1.7 J / 1.2 ft.lbs.
Blows Per Minute (variable speed)	0 - 5,000 BPM
No Load Speed (variable speed)	0 - 1,350 RPM



HR1840

#### 11/16" Rotary Hammer

AMPS	4.5
Max. Capacity (concrete drilling)	11/16"
Optimum Range (concrete drilling)	5/32" - 3/8"
Max. Capacity (concrete drilling w/ core bit)	1-3/8"
Impact Energy:	1.03 ft.lbs. / 1.4 J

X



#### HAMMER DRILLS



#### HP2070F

#### 3/4" Hammer Drill

Max. Capacity (concrete drilling)	3/4"
Capacities: Steel: Low, High (5/8", 5/1	6"), Wood: Low, High (1-9/16", 1")
No Load Speed (var. 2 spd)	0 - 1,200 / 0 - 2,900 RPM
Blows Per Minute (2 speed)	0 - 24,000 / 0 - 58,000 BPM
AMPS	8.2



#### HP2050

#### 3/4" Hammer Drill

Max. Capac	city (concrete drilling	3/4"
Capacities:	Steel: Low, High (1/2"	, 5/16"), Wood: Low, High (1-9/16", 1")
No Load Sp	eed (var. 2 spd)	0 - 1,200 / 0 - 2,900 RPM
Blows Per I	Minute (2 speed)	0 - 24,000 / 0 - 58,000 BPM
AMPS		6.6



#### HP2050F

#### 3/4" Hammer Drill

Max. Capac	city (concrete drilli	ng) 3/4"
Capacities:	Steel: Low, High (1/2	2", 5/16"), Wood: Low, High (1-9/16", 1")
No Load Sp	eed (var. 2 spd)	0 - 1,200 / 0 - 2,900 RPM
Blows Per I	Minute (2 speed)	0 - 24,000 / 0 - 58,000 BPM
AMPS		6.6



#### HP2010N

#### 3/4" Hammer Drill

Capacities:	Concrete: Low, High (3/4", 1/2") Steel: Low, High (1/2", 1/4") Wood: Low, High (1-1/2", 3/4")
No Load Speed (var. 2 spd)	0 - 900 / 0 - 2,300 RPM
Blows Per Minute (2 speed)	0 - 18,000 / 0 - 46,000 BPM
AMPS	6
Chuck Size	1/2"



#### HP1641K

#### 5/8" Hammer Drill, with Keyless Chuck

Max. Capacity (concrete drilling)	5/8"
Capacities:	Steel (1/2"), Wood (1-3/16")
No Load Speed (variable speed)	0 - 2,800 RPM
Blows Per Minute (variable speed)	0 - 44,800 BPM
AMPS	6



#### HP1640

#### 5/8" Hammer Drill

Max. Capacity (concrete drilling)	5/8"
Capacities:	Steel (1/2"), Wood (1-3/16")
No Load Speed (variable speed)	0 - 2,800 RPM
Blows Per Minute (variable speed)	0 - 44,800 BPM
AMPS	6



 $\rm MM4^{\circ}$  4-stroke unleashes your potential so you can power through jobs without hesitation. No oil mixing, lower costs and reduced emissions mean less stress and more savings. Power and efficiency are on your side.





### 4-STROKE **FEATURES**

- Reduced emissions for cleaner operation
- Fast and easy starts with mechanical automatic engine decompression
- Higher engine torque delivers the power and performance needed to meet the demands of the professional



#### EK7651H

#### 14" 75.6 cc MM4® 4-Stroke Engine **Power Cutter**

Engine Displacement (cu.in./cc)	4.61 cu.in. (75.6 cc)
Engine (max power)	4.1 HP/3 kW
No Load Speed/Max. Spindle Speed	9,100 / 4,300 RPM
Fuel Type	Unleaded gas
Fuel Tank Capacity	37 oz.



### EK8100

#### 16" 81 cc Power Cutter

Engine Displacement (cu.in./cc)	4.9 cu.in. (81 cc)
Engine (max power)	5.6 HP/4.2 kW
No Load Speed/Max. Spindle Speed	9,350 / 3,820 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	37 oz.



### **EK7301**

#### 14" 73 cc Power Cutter

Engine Displacement (cu.in./cc)	4.5 cu.in. (73 cc)
Engine (max power)	5.1 HP/3.8 kW
No Load Speed/Max. Spindle Speed	9,350 / 4,300 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	37 oz.



#### EK6101

#### 14" 61 cc Power Cutter

Engine Displacement (cu.in./cc)	3.7 cu.in. (61 cc)
Engine (max power)	4.4 HP/3.2 kW
No Load Speed/Max. Spindle Speed	9,850 / 4,400 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	23.6 oz.



#### 4114

#### 14" SJS™ Angle Cutter

Blade Diameter	14"
AMPS	15
No Load Speed	3,800 RPM
Max. Cutting Depth:	14" Diamond Blade (5"), 14" Cut-Off Wheel (5")
Arbor	1"

## CONCRETE GRINDERS



#### GA5040X1

SIST

#### 5" SJS™II Angle Grinder with Cutting/ **Tuck Point Guard**

Wheel Diameter	5"
AMPS	10
No Load Speed	11,000 RPM
Max. Cutting Depth	1"
Spindle Thread	5/8" - 11 UNC



#### GA5042CX1

## 5" SJS™II High-Power Grinder with Cutting/Tuck Point Guard

Wheel Diameter	5"
AMPS	12
No Load Speed (variable speed)	2,800 - 11,000 RPM
Max. Cutting Depth	1"
Spindle Thread	5/8" - 11 UNC

#### **TUCK POINT / DIAMOND BLADE**

196846-1 / 196845-3 5" Dust Extraction Tuck Point Guard



**A-95906**4" Dual Sandwich
Diamond Tuck Point Blade



#### A-95912

4-1/2" Dual Sandwich Diamond Tuck Point Blade



#### A-96017

5" Dual Sandwich Diamond Tuck Point Blade



# MASONRY SAWS & PLANERS







#### 4100KB

#### 5" Dry Masonry Saw, with Dust Extraction

AMPS	13
Watts Out	1,800
No Load Speed	12,200 RPM
Blade Diameter	5"
Max. Cutting Depth	1-9/16"



#### 4101RH

#### 5" Masonry Saw

AMPS	7.9
Watts Out	1,050
No Load Speed	13,800 RPM
Blade Diameter	5"
Max. Cutting Capacities:	90° (1-5/8"), 45° (1")



#### 4-3/8" Masonry Saw

12
1,500
14,500 RPM
4-3/8"
1-3/8"

#### SIST

#### PC5010C

#### 5" SJS™II Concrete Planer with Dust **Extraction Shroud**

Wheel Diameter	5"
No Load Speed (variable speed)	4,000 - 9,000 RPM
AMPS	12
Overall Length	13-3/4"
Constant speed control	Yes





#### 5" Concrete Planer

Wheel Diameter	5"
No Load Speed	10,000 RPM
AMPS	10
Overall Length	17-1/8"
Net Weight	8.9 lbs.



#### PC5001C

#### 5" Concrete Planer

Wheel Diameter	5"
No Load Speed	10,000 RPM
AMPS	10
Overall Length	18-13/16"
Net Weight	11.2 lbs.

### **CONCRETE PLANERS ACCESSORIES & DIAMOND BLADES**

#### **Diamond Cup Wheels**

 Low-Vibration design engineered to keep the wheel planted firmly on the surface for more efficient material removal



Size	Description	Model	Part#
4-3/8"	Continuous rim	PC1100	792289-1
4-3/0	Segmented rim	PUTIOU	724907-1A
4-1/2"	Double Row	PC5010C	A-96198
4-1/2	Turbo Rim	F030100	A-96403
	Segmented rim	PC5000C, PC5001C, PC5010C	A-95009
5"	Continuous rim		A-94998
	Turbo rim		A-98871

#### **Segmented Rim**

Blade Diameter	Material	Part#
4"	Cured Concrete,	A-94677
5"	Block, Brick	A-94699
Turbo Rim	Pi.	makita 4
Blade Diameter	Material	Part#

		4" (	
	Blade Diameter	Material	Part#
	4"	Cured Concrete, Block, Brick	A-94546
		Granite, Ceramic, Fire Brick	A-94580
	5"	Cured Concrete, Block, Brick	A-94568
		Granite, Ceramic, Fire Brick	A-94605



#### VC4710

#### 12 Gallon Xtract Vac® Wet/Dry Dust Extractor/Vacuum

Gross Container Size	12 gal.
Wet Capacity	8 gal.
Air Flow Rate	135 CFM
Static Water Lift	92"
AMDO	10



E	
XCV05PT	

#### 18V X2 LXT® (36V) Brushless Backpack **Dust Extractor/Vacuum Kit**

XCV05Z

Gross Container Size	.5 yaı.
Air Flow Rate	53 CFM
Static Water Lift	28.5"
Continuous Use (max, in minutes)	90 min.
Battery	2X 18V LXT® Lithium-Ion
//	
//	



### XCV05ZX

#### 18V X2 LXT® (36V) Brushless Backpack **Dust Extractor/Vacuum**

Gross Container Size	.5 gal.
Air Flow Rate	53 CFM
Static Water Lift	28.5"
Continuous Use (max, in minutes)	60 min.
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

Tool only, battery & charger not included

#### XCV10ZX

Tool only, battery &

charger not included

## 18V X2 LXT® (36V) BL™ 1/2 Gal. HEPA Filter Backpack Dust Extractor, AWS™ Capable

Gross Container Size	.o yaı.
Air Flow Rate	64 CFM
Static Water Lift	44"
Continuous Use (max, in minutes)	62 min.
Battery	2X 18V LXT® Lithium-Ion





Continuous Use (max, in minutes)

#### XCV04PT XCV04Z 18V X2 LXT® (36V) 2.1 Gallon HEPA

Filter Dry Dust Extractor/Vacuum Kit	
Gross Container Size	2.1 gal.
Air Flow Rate	127 CFM
Static Water Lift	96"



XCV02Z

#### 18V LXT® 3/4 Gallon Portable Dry Dust Extractor/Blower

Gross Container Size	.75 gal
Air Flow Rate	49 CFN
Static Water Lift	24
Continuous Use (max, in minutes)	42 min
Battery	18V LXT® Lithium-lo



#### 18V X2 LXT® (36V) Brushless 2.1 Gal HEPA Filter Dry Dust Extractor/Vac Kit, AWS

Gross Container Size	2.1 gal.
Air Flow Rate	74 CFM
Static Water Lift	39"
Continuous Use (max, in minutes)	75 min.
Battery	2X 18V LXT® Lithium-Ion



XCV07PT

18V X2 LXT®	(36V)	Brushless 2.1 Gallon
HEPA Filter Dry Dust Extractor Kit		

XCV07ZX

Gross Container Size	2.1 gal.
Air Flow Rate	74 CFM
Static Water Lift	39"
Continuous Use (max, in minutes)	75 min.
Battery	2X 18V LXT® Lithium-Ion

Battery

65 min. 2X 18V LXT® Lithium-Ion



#### **VACUUMS**



#### <u>LXT</u>.BRUSHLESS



#### 18V LXT® Brushless 2 Gal. HEPA Filter Portable Wet/Dry Dust Extractor/Vacuum Kit

57 CFM
27"
60 min.
(T <sup>®</sup> Lithium-lon



#### **18V LXT® Vacuum**

Capacity (pint)	1 pint
Continuous Use (max, in minutes)	60 min.
Battery	18V LXT® Lithium-Ion
Overall Length	19"
Net Weight (with battery)	2.9 lbs.



LXT BRUSHLESS

Tool only, battery & charger not included

#### YCV067

18V X2 LXT® (36V) Brushless 2.1 Gallon Wet/Dry Dust Extractor/Vacuum

Gross Container Size	2.1 gal.
Wet Capacity	1.5 gal.
Air Flow Rate	74 CFM
Static Water Lift	39"
Continuous Use (max, in minutes)	75 min.



## XLC02R1B XLC02ZB 28 18V LXT® Compact Vacuum Kit

Capacity (pint)	1.3 pint
Continuous Use (max, in minutes)	15 min.
Battery	18V LXT® Compact Lithium-Ion
Overall Length	18-3/4"
Net Weight (with battery)	2.7 lbs.





## XCVO9PT XCVO9Z

#### 18V X2 LXT® (36V) Brushless 1/2 Gallon HEPA Filter Backpack Dry Vacuum Kit

Gross Container Size	.5 gal.
Air Flow Rate	70 CFM
Static Water Lift	44"
Continuous Use (max, in minutes)	116 min.
Battery	2X 18V LXT® Lithium-Ion



### XLC02RB1W XLC02ZW

18V LXT® Compact Vacuum Kit

Capacity (pint)	1.3 pint
Continuous Use (max, in minutes)	20 min.
Battery	18V LXT® Compact Lithium-Ion
Overall Length	18-3/4"
Net Weight (with hattery)	2.7 lhs



LXT BRUSHLESS

DRC200PT



#### 18V X2 LXT® Brushless Robotic Vacuum Kit

Gross Container Size	.66 gal.
Cleaning Width:	8-7/8", w/ Side Brushes (18-1/16")
Working Sound Level	64 dB(A)
Continuous Use (max, in n	ninutes) 200 min.
Battery	2X 18V LXT® Lithium-Ion



#### DCL501Z

#### 18V LXT® Brushless Cyclonic Canister Vacuum

Capacity (pint)	.53 pint
Air Flow Rate	46 CFM
Static Water Lift	26.5"
Continuous Use (max, in minutes)	64 min.
Battery	18V LXT® Lithium-Ion



#### 6407

#### 3/8" Drill

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 2,500 RPM
AMPS	4.9
Overall Length	10-9/32"
Net Weight	3.1 lbs.



#### DP4002

#### 1/2" Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed (variable speed)	0 - 700 RPM
AMPS	7
Overall Length	12"
Net Weight	4.9 lbs.



#### 6408 / 6408K

#### 3/8" Drill

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 2,500 RPM
AMPS	4.9
Overall Length	10-9/32"
Net Weight	3.1 lbs.



#### DS4011

#### 1/2" Spade Handle Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed	600 RPM
AMPS	8.5
Overall Length	13-3/8"
Net Weight	6.3 lbs.



#### 6302H

6408 Shown

#### 1/2" Drill

Capacities:	Steel (1/2"), Wood (1-3/8")
No Load Speed (variable speed)	0 - 550 RPM
AMPS	6.5
Overall Length	11-1/4"
Net Weight	4.8 lbs.
Net Weight	4.81



#### DS4000

#### 1/2" Spade Handle Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed	500 RPM
AMPS	9
Overall Length	14-1/4"
Net Weight	8.8 lbs.



#### DP4000

#### 1/2" Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed (variable speed)	0 - 950 RPM
AMPS	7
Overall Length	12"
Net Weight	4.8 lbs.



#### DS4012

#### 1/2" Spade Handle Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed (variable speed)	0 - 600 RPM
AMPS	8.5
Overall Length	13-3/8"
Net Weight	6.2 lbs.

#### **ANGLE DRILLS**



#### DA4000LR

#### 1/2" Angle Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed (2 spd)	400/900 RPM
AMPS	7.5
Overall Length	16-1/4"
Net Weight	8.1 lbs.



#### **DA3010F**

#### 3/8" Angle Drill

Capacities:	Steel (3/8"), Wood (13/16")
No Load Speed (variable speed)	0 - 2,400 RPM
AMPS	4
Overall Length	10-5/8"
Net Weight	3.5 lbs.

#### 1/2" Angle Drill

Capacities:	Steel (1/2"), Wood (1-1/2")
No Load Speed (2 spd)	300/1,200 RPM
AMPS	10
Overall Length	18-1/4"
Net Weight	12.3 lbs.



LXT BRUSHLESS



### 18V X2 LXT® (36V) Brushless

1/2 Hight Angle Dill	KIL	
Capacities (Wood): Hole Saw (6-1/4"), Ship Auger Bit (2"), Self-Feed Bit (4-5/8")		
No Load Speed (var. 2 spd)	0 - 350 / 1 - 1,400 RPM	
Battery	2X 18V LXT® Lithium-Ion	
Overall Length	21-1/4"	
Net Weight (with battery)	14 lbs.	





XAD02

#### 18V LXT® 3/8" Angle Drill Kit

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 1,800 RPM
Maximum Torque (in.lbs./N•m)	121 in.lbs./14N•m
Battery	18V LXT® Lithium-Ion
Overall Length	12-3/8"



LXT

XAD01

#### 18V LXT® 3/8" Angle Drill Kit

Capacities:	Steel (3/8"), Wood (1")
No Load Speed (variable speed)	0 - 1,800 RPM
Maximum Torque (in.lbs./N•m)	121 in.lbs./14N•m
Battery	18V LXT® Lithium-lon
Overall Length	12-3/8"



#### FS6200

#### 6,000 RPM Drywall Screwdriver

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 6,000 RPM
AMPS	6
Overall Length	11-1/8"
Net Weight	3 lbs.



#### FS4200

#### 4,000 RPM Drywall Screwdriver

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
AMPS	6
Overall Length	11-1/8"
Net Weight	3 lbs.



#### FS2200

#### 2,500 RPM Drywall Screwdriver

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 2,500 RPM
AMPS	6
Overall Length	11-1/8"
Net Weight	3.5 lbs.



#### FS2500

#### 2,500 RPM Screwdriver

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 2,500 RPM
AMPS	6
Overall Length	11"
Net Weight	3.4 lbs.



#### FS2701

#### 2,500 RPM Torque Adjustable Screwdriver

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 2,500 RPM
AMPS	6
Overall Length	11-1/8"
Net Weight	4 lbs.



<u>LXT</u> BRUSHLESS

XSF05T 18V LXT® Brushless 2,500 RPM

Screwdriver Kit		
Bit Type	1/4" Hex	
No Load Speed (variable speed)	0 - 2,500 RPM	
Battery	18V LXT® Lithium-Ion	
Overall Length	9-3/8"	
Net Weight (with battery)	3.9 lbs.	



XSF03TX2

XSF03Z

#### 18V LXT® Brushless 4,000 RPM Drywall Screwdriver Kit, with Autofeed Magazine

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Lithium-Ion
Overall Length	16"



XSF03RX2

#### 18V LXT® Compact Brushless 4,000 RPM **Drywall Screwdriver Kit w Autofeed Magazine**

XSF03Z

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Compact Lithium-Ion
Overall Length	16"



<u>LXT</u> BRUSHLESS

ASIUSI	X01 002
18V LXT® Brushless 4,000 Screwdriver Kit	RPM Drywall

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	9-7/8"
Net Weight (with battery)	3.8 lbs.



<u>LXT BRUSHLESS</u>

XSF03R

#### 18V LXT® Compact Brushless 4,000 RPM **Drywall Screwdriver Kit**

Bit Type	1/4" Hex
No Load Speed (variable speed)	0 - 4,000 RPM
Battery	18V LXT® Compact Lithium-Ion
Overall Length	9-7/8"
Net Weight (with battery)	3.2 lbs.





LXT BRUSHLESS

## 18V LXT® Compact Brushless 2,500 RPM Drywall Screwdriver Kit

#### Bit Type 1/4" Hex 0 - 2,500 RPM No Load Speed (variable speed) 18V LXT® Compact Lithium-Ion Battery 9-3/8" Overall Length Net Weight (with battery) 3.5 lbs.



XRF02Z

#### **18V LXT® Autofeed Screwdriver**

Bit Type	1/4" Hex
No Load Speed	4,000 RPM
Collated Screw Capacity	1" - 2-3/16"
Battery	18V LXT® Lithium-Ion
Overall Length	16-3/4"



XRF01Z

#### 18V LXT® Autofeed Screwdriver

Bit Type	1/4" Hex
No Load Speed	4,000 RPM
Collated Screw Capacity	1-3/4" - 2-15/16"
Battery	18V LXT® Lithium-Ion
Overall Length	18-1/4"



199145-0 **Collated Autofeed Screwdriver Magazine** 

- Collated screw length capacity range from 1" to 2-3/16" for increased versatility
- Optimized contact point shape for close-to-corner screw
- Quick attachment and removal of collated magazine

Designed for Makita cordless screwdriver models XSF03, XSF04 and corded screwdriver models FS2200, FS4200, FS6200

#### **CUT-OUT TOOL**



3706 Shown

#### 3706 / 3706K

#### **Drywall Cut-Out Tool**

Collet Capacity	1/8", 1/4"
No Load Speed	32,000 RPM
AMPS	5
Overall Length	9-7/8"
Net Weight	2.4 lbs.



6952

#### 1/4" Impact Driver

Hex Shank	1/4"
Impacts Per Minute (variable speed)	0 - 3,100 IPM
No Load Speed (variable speed)	0 - 3,200 RPM
Maximum Torque (ft.lbs./N•m)	120 ft.lbs./162 N•m
AMPS	2.3



6953

#### 1/2" Impact Wrench w/ Detent Pin Anvil

Capacity (square drive)	1/2"
Impacts Per Minute (variable speed)	0 - 3,000 IPM
No Load Speed (variable speed)	0 - 3,000 RPM
Maximum Torque (ft.lbs./N•m)	110 ft.lbs./150 N•m
AMPS	2.5



TW0200

#### 1/2" Impact Wrench w/ Detent Pin Anvil

Capacity (square drive)	1/2"
Impacts Per Minute (variable speed)	0 - 2,200 IPM
No Load Speed (variable speed)	0 - 2,200 RPM
Maximum Torque (ft.lbs./N•m)	150 ft.lbs./200 N•m
AMPS	3.3



#### TW0350

#### 1/2" Impact Wrench w/ Detent Pin Anvil

Capacity (square drive)	1/2"
Impacts Per Minute	2,000 IPM
No Load Speed (variable speed)	0 - 2,000 RPM
Maximum Torque (ft.lbs./N•m)	258 ft.lbs./350 N•m
AMPS	3.5



#### 3/4" Impact Wrench w/ Friction Ring Anvil

Capacity (square drive)	3/4"
Impacts Per Minute	1,600 IPM
No Load Speed	1,700 RPM
Maximum Torque (ft.lbs./N•m)	433 ft.lbs./588 N•m
AMPS	9



#### TW1000

#### 1" Impact Wrench w/ Friction Ring Anvil

Capacity (square drive)	1"
Impacts Per Minute	1,500 IPM
No Load Speed	1,400 RPM
Maximum Torque (ft.lbs./N•m)	738 ft.lbs./1,000 N•m
AMPS	12



#### 6922NB

#### 3/4" Shear Wrench

<b>Bolt Size Capacities:</b>	A325 (5/8"	3/4", 7/8"), A490 (5/8", 3/4"
No Load Speed		18 RPN
Lock-Off Switch		No
Maximum Torque (ft.lbs	s./N•m)	593 ft.lbs./804 N•n
Electric Brake		No

#### ANGLE GRINDERS



#### GA4030 / GA4030K

#### 4" Angle Grinder

Wheel Diameter	4"
AMPS	6
No Load Speed	11,000 RPM
Spindle Thread	M10 x 1.25
Lock-On / Lock-Off	Yes / No



#### GA4530

#### 4-1/2" Angle Grinder

Wheel Diameter	4-1/2"
AMPS	6
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



#### GA4534

#### 4-1/2" Paddle Switch Angle Grinder

Wheel Diameter	4-1/2"
AMPS	6
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On Switch	No / Yes



### 9557NB

#### 4-1/2" Angle Grinder

Wheel Diameter	4-1/2"
AMPS	7.5
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No

### **ANGLE GRINDERS**



# 9557PB

### 4-1/2" Paddle Switch Angle Grinder

Wheel Diameter	4-1/2"
AMPS	7.5
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / Yes



# SJS

# 4-1/2" SJS™ Paddle Switch Angle Grinder

Wheel Diameter	4-1/2"
AMPS	10
No Load Speed	11,900 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



### 4-1/2" SJS™ Paddle Switch Angle Grinder

4-1/2"
13
10,500 RPM
5/8" - 11 UNC
No / Yes



9564CV

### 4-1/2" SJS™ Angle Grinder

Wheel Diameter	4-1/2"
AMPS	13
No Load Speed (variable speed)	2,800 - 10,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



### GA4542C

### 4-1/2" SJS™II Angle Grinder

Wheel Diameter	4-1/2"
AMPS	12
No Load Speed (variable speed)	2,800 - 11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



 <u>-</u> 7. E	HU	ЭП	LE	93

71.16.5 11			
18V LXT® Brushle Angle Grinder Kit	ss 4-1/2"	/ 5"	Cut-Of

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



### XAG09Z

### 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



LXT BRUSHLESS (RAKE)

XAG11T

XAG11Z

# 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder Kit

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



# WM XAG16Z

# 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



# XAG17ZU

# 18V LXT® Brushless 4-1/2" / 5" Cut-Off/ Angle Grinder, AWS™

Wheel Diameter	5"
Battery	18V LXT® Lithium-lon
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



# XAG20Z

# 18V LXT® Brushless 4-1/2" / 5" Paddle Switch Cut-Off/Angle Grinder

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



XAG21ZU

# 18V LXT® Brushless 4-1/2" / 5" Paddle Switch Cut-Off/Angle Grinder, AWS™

Wheel Diameter	5"
Battery	18V LXT® Lithium-Ion
No Load Speed (variable speed)	3,000 - 8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes





# GA5042C

### 5" SJS™II Angle Grinder

Wheel Diameter	5"
AMPS	12
No Load Speed (variable speed)	2,800 - 11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



# 9558PB

12 ₹

### 5" Paddle Switch Angle Grinder

Wheel Diameter	5"
AMPS	7.5
No Load Speed	10,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes





# 9565PCV

### 5" SJS™ High-Power Paddle Switch **Angle Grinder**

Wheel Diameter	5"
AMPS	13
No Load Speed (variable speed)	2,800 - 10,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-0n / Lock-0ff	No / Yes



13 **a** 

9565CV

### 5" SJS™ Angle Grinder

Wheel Diameter	5"
AMPS	13
No Load Speed (variable speed)	2,800 - 10,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No





# ANGLE GRINDERS





13 🖥

# 9565PC

### **5" SJS™ Paddle Switch Angle Grinder**

Wheel Diameter	5"
AMPS	13
No Load Speed	10,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



# 9005B

### 5" Angle Grinder

Wheel Diameter	5"
AMPS	9
No Load Speed	12,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



9005BZ

### 5" Angle Grinder

Wheel Diameter	5"
AMPS	9
No Load Speed	12,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / No



SJS

GA5020

### 5" SJS™ Angle Grinder

Wheel Diameter	5"
AMPS	10.5
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes





GA5020Y

# 5" SJS™ Angle Grinder

Wheel Diameter	5"
AMPS	10.5
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



GA5010Z

### 5" Angle Grinder

Wheel Diameter	5"
AMPS	10.5
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / No



9566PCX1 / 9566PC

### 6" SJS™ Paddle Switch Cut-Off/Angle Grinder

Wheel Diameter	6"
AMPS	13
No Load Speed	9,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No, Yes



9566CV

### 6" SJS™ Cut-Off/Angle Grinder

Wheel Diameter	6"
AMPS	13
No Load Speed (variable speed)	4,000 - 10,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



SJS

# GA6020YX1

# 6" SJS™ Cut-Off/Angle Grinder

Wheel Diameter	6"
AMPS	10.5
No Load Speed	10,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



GA6020

# 6" SJS™ Angle Grinder

Wheel Diameter	6"
AMPS	10.5
No Load Speed	10,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / No



GA6010ZX2 / GA6010Z

# 6" Cut-Off/Angle Grinder

Wheel Diameter	6"
AMPS	10.5
No Load Speed	10,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / No



GA7011C

# 7" Angle Grinder

Wheel Diameter	7"
AMPS	15
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / Yes



# GA7021

### 7" Angle Grinder

Wheel Diameter	7"
AMPS	15
No Load Speed	6,600 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



GA7031Y

# 7" Angle Grinder

Wheel Diameter	7"
AMPS	15
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



GA7060

### 7" Angle Grinder

Wheel Diameter	7"
AMPS	15
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



*SJSII* GA7061

7" SJS™II Angle Grinder

Wheel Diameter	7'
AMPS	15
No Load Speed	8,500 RPM
Spindle Thread	5/8" - 11 UNO
Lock-On / Lock-Off	No / Yes



### **GA7040S**

### 7" Angle Grinder

Wheel Diameter	7'
AMPS	15
No Load Speed	8,000 RPN
Spindle Thread	5/8" - 11 UNO
Lock-On / Lock-Off	Yes / No



# GA9031Y

### 9" Angle Grinder

Wheel Diameter	9"
AMPS	15
No Load Speed	6,600 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



### 9" Angle Grinder

Wheel Diameter	9"
AMPS	15
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No




### GA9060

### 9" Angle Grinder

Wheel Diameter	9"
AMPS	15
No Load Speed	6,600 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes





# 18V X2 LXT® (36V) Brushless 7" Cut-Off/Angle Grinder Kit

Wheel Diameter	7"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	7,800 RPM
Spindle Thread	5/8" - 11 UNC
Lock-on / Lock-Off	No / Yes



XAG13PT1

XAG13Z1

# 18V X2 LXT® (36V) Brushless 9" Cut-Off/Angle Grinder Kit

Wheel Diameter	9"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



LXT BRUSHLESS (RAN)

# WAG22ZU1

**DIE GRINDERS** 

# 18V X2 LXT® (36V) Brushless 7" Cut-Off/Angle Grinder, AWS™

Wheel Diameter	7"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	7,800 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



# WM XAG23ZU1

# 18V X2 LXT<sup>®</sup> (36V) Brushless 9" Cut-Off/Angle Grinder, AWS™

Wheel Diameter	9"
Battery	2X 18V LXT® Lithium-Ion
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	No / Yes



# GA7001L

## 7" Angle Grinder

Wheel Diameter	7"
AMPS	15
No Load Speed	6,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes / No



# **GA7911**

### **Angle Sander**

Grinding Wheels	7" or 9"
AMPS	15
No Load Speed	7,000 RPM
Spindle Thread	5/8" - 11 UNC
Lock-On / Lock-Off	Yes No.



# **GS5000**

# 5" Straight Grinder

Max. Wheel Diameter	5"
AMPS	7
No Load Speed	5,600 RPM
Spindle Thread	5/8" x 24 UNC
Lock-On / Lock-Off	No / Yes



## SJS

# GD0801C

# 1/4" SJS™ Paddle Switch Die Grinder

Max. Wheel Diameter	1"
AMPS	6.6
Collet	1/4"
No Load Speed (variable speed)	7,000 - 29,000 RPM
Lock-On / Lock-Off	No / Yes





### GD0800C

### 1/4" SJS™ Die Grinder

Max. Wheel Diameter	1"
AMPS	6.6
Collet	1/4"
No Load Speed (variable speed)	7,000 - 28,000 RPM
Lock-On / Lock-Off	Yes / No





### 1/4" Paddle Switch Die Grinder

Max. Wheel Diameter	1-1/2"
AMPS	3.5
Collet	1/4"
No Load Speed	25,000 RPM
Lock-On / Lock-Off	No / Yes







# GD0601

# 1/4" Die Grinder

Max. Wheel Diameter	1-1/2"
AMPS	3.5
Collet	1/4"
No Load Speed	25,000 RPM
Lock-On / Lock-Off	Yes / No
Collet No Load Speed	1/4" 25,000 RPM



# GD0603

### 1/4" Compact Die Grinder

Max. Wheel Diameter	3/4"
AMPS	2.2
Collet	1/4"
No Load Speed	28,000 RPM
Lock-On / Lock-Off	Yes / No



# **DIE GRINDERS**







XDG01T 18V LXT® 1/4" Die Grinder Kit

Max. Wheel Diameter	1-1/2"
Battery	18V LXT® Lithium-Ion
Collet	1/4"
No Load Speed	25,000 RPM
Lock-On / Lock-Off	Vec / No



Tool only, battery & charger not included LXT XDG02Z

### 18V LXT® 1/4" Compact Die Grinder

Max. Wheel Diameter	1-1/2"
Battery	18V LXT® Lithium-Ion
Collet	1/4"
No Load Speed	26,000 RPM
Lock-On / Lock-Off	Yes / No

### **SANDERS**



### GV5010

### 5" Disc Sander

Sanding Disc	5"
No Load Speed	5,000 RPM
AMPS	3.9
Overall Length	7-1/8"
Net Weight	2.6 lbs.



# GV7000C

### 7" Disc Sander

Sanding Disc	7"
Wool Bonnet	7"
No Load Speed (variable speed)	2,500 - 4,700 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	7.9

# **NIBBLERS & SHEARS**



# JS3201

### 10 Gauge Shear

Capacities:	Aluminum (9 ga.), Mild S	teel (10 ga.), Stainless (13 ga.)
Strokes Per	Minute	1,600 SPM
AMPS		6.2
Overall Leng	rth	8-3/8"
Net Weight		7.4 lbs.



# JS1602

### 16 Gauge Shear

Capacities:	Aluminum (13 ga.),	Mild Steel (16 ga.),	Stainless (18 ga.)
Strokes Per	Minute		4,000 SPM
AMPS			3.3
Overall Leng	th		12-1/2"
Net Weight			3.4 lbs.



# JS1300

### 18 Gauge Straight Shear

Capacities:	Aluminum (13 ga.), Mild Stee	el (18 ga.), Stainless (20 ga.)
Strokes Per	Minute (variable speed)	0 - 2,500 SPM
AMPS		6.5
Overall Leng	jth	11-7/8"
Net Weight		3.9 lbs.



<u>LXT</u> XSJ01T



XSJ01Z

# 18V LXT® 18 Gauge Straight Shear Kit

Capacities:	Mild Steel (18 ga.), Stainless (20 ga.)
Strokes Per Minute	3,000 SPM
Battery	18V LXT® Lithium-Ion
360° Rotating Head	Yes
Overall Length	13-3/4"



<u>LXT</u>

battery & charger not included

# XSJ02Z

### **18V LXT® 16 Gauge Compact Straight** Shear

Capacities:	Mild Steel (16 ga.), Stainless (18 ga.)
Strokes Per Minute	4,300 SPM
Battery	18V LXT® Lithium-Ion
360° Rotating Head	No
Overall Length	14-1/4"



# JN3201

## **10 Gauge Nibbler**

Capacities:	Aluminum	(10 ga.), Mild Steel (10 ga.), Stainless (13 ga.)
<b>Cutting Radio</b>	us:	Inner Edge (4-3/4"), Outer Edge (5-1/16")
Strokes Per I	Minute	1,300 SPM
AMPS		6.2
Overall Leng	th	8-1/2"



# JN1601

# 16 Gauge Nibbler

Capacities: Aluminum (10 ga	i.), Mild Steel (16 ga.), Stainless (18 ga.)
Cutting Radius:	Inner Edge (1-3/4"), Outer Edge (2")
Strokes Per Minute	2,200 SPM
AMPS	5
Overall Length	10-1/4"



XNJ01T

XNJ01Z

## 18V LXT® 16 Gauge Nibbler Kit

Capacities: Aluminum (12 ga.), Mild Steel (16 ga.), Stainless (18 ga.) **Cutting Radius:** Inner Edge (1-3/4"), Outer Edge (2") 0 - 1,900 SPM 18V LXT® Lithium-lon Strokes Per Minute (variable speed) Battery 12-3/8" Overall Length



# JS8000

### **Fiber Cement Shear**

Capacity	5/16"
Strokes Per Minute (variable speed)	0 - 2,500 SPM
AMPS	6.5
Overall Length	13-5/8"
Net Weight	4.8 lbs.

# PORTABLE BAND SAWS



# 2107FZ / 2107FZK

### **Portable Band Saw**

Max. Cutting Capacity: Round Workpiece (4-3/4"), Rectangula	r Workpiece (4-3/4" x 4-3/4")
No Load Speed (ft./min., var. speed)	200 - 350 ft./min
Blade Length	44-7/8'
AMPS	6.5
Overall Length	20-5/8'



XBP02TX XBP02Z

### 18V LXT® Portable Band Saw Kit

Max. Cutting Capacities: Round workpiece (4-3/4"), Rectangular workpiece (4-3/4" x 4-3/4")	
No Load Speed (ft./min., var. speed)	275 - 530 ft./min.
Blade Length	44-7/8"
Battery	18V LXT® Lithium-Ion
Overall Length	20-5/8"



XBP03T

# 18V LXT® Compact Band Saw Kit

Max. Cutting Capacities: Round workpiece (2-1/2"), Rect	tangular workpiece (2-1/2" x 2-1/2")
No Load Speed (ft./min.)	630 ft./min.
Blade Length	32-7/8"
Battery	18V LXT® Lithium-Ion
Overall Length	18-3/4"

### **DIE GRINDERS / SANDERS / NIBBLERS & SHEAR / METALWORKING SAWS**



### 14" Cut-Off Saw with Tool-Less Wheel Change

AMPS	15
Blade Diameter	14"
No Load Speed	3,800 RPM
Max. Cutting Capacity (at 90°)	5"
Arbor	1"



## LW1401 / LW1401X / LW1401X2

### 14" Cut-Off Saw

AMPS	15
Blade Diameter	14"
No Load Speed	3,800 RPM
Max. Cutting Capacity (at 90°)	5"
Arbor	1"



# XWL01PT

### 18V X2 LXT® (36V) Brushless 14" Cut-Off Saw Kit

Battery	2X 18V LXT® Lithium-Ion
Blade Diameter	14"
No Load Speed	3,800 RPM
Max. Cutting Capacity (at 90°)	5"
Arbor	1"



### 14" Cut-Off Saw, w/ AC/DC Switch

AMPS	15
Blade Diameter	14"
No Load Speed	3,800 RPM
Max. Cutting Capacity (at 90°)	4-1/2"
Arbor	1"



# LC1230

### 12" Metal Cutting Saw

AMPS	15
Blade Diameter	12"
Max. Cutting Capacities:	90° (1,300 RPM), 45° (4-1/2")
Max. Cutting Capacity (at 45°)	3-1/2"
Arbor	1"



### CA5000X

### 4-5/8" Aluminum Groove Cutter

AMPS	12
Blade Diameter	4-5/8"
No Load Speed (variable speed)	2,200 - 6,400 RPM
Max. Cutting Depth	7/16"
Arbor	13/16"



### 4131

### 7-1/4" Metal Cutting Saw

AMPS	13
Blade Diameter	7-1/4"
No Load Speed	3,500 RPM
Max. Cutting Depth	2-1/2"
Arbor	5/8"



E		
XSC04T	X	SC047

### 18V LXT® BL™ 5-7/8" Metal Cutting Saw Kit, w/ Electric Brake and Chip Collector

Blade Diameter	5-7/8"
Arbor	5/8"
Max. Cutting Depth	2-1/4"
No Load Speed	4,200 RPM
Electric Brake	Yes



# <u>LXT</u> BRUSHLESS

XSC02T	XSC02Z

### 18V LXT® Brushless 5-7/8" Metal **Cutting Saw Kit**

Blade Diameter	5-7/8"
Arbor	5/8"
Max. Cutting Depth	2-1/4"
No Load Speed	3,900 RPM
Battery	18V LXT® Lithium-Ion



	_
KEN XSCO3T	XSC03Z

# 18V LXT® 5-3/8" Metal Cutting Saw Kit, with Electric Brake and Chip Collector

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Depth	2"
No Load Speed	3,600 RPM
Electric Brake	Yes



XSC01T	XSC01Z
18V LXT® 5-3/8"	<b>Metal Cutting Saw Kit</b>

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Depth	2"
No Load Speed	3,600 RPM
Battery	18V LXT® Lithium-Ion

METAL CUTTING SAW BLADES



XCS02T1	XCS02ZK
18V LXT® Brushles	s Steel Rod Flush-

Blade Diameter	4-5/16"
Cutting Capacity (thickness)	1"
No Load Speed	2,200 RPM
Lock-On / Lock-Off	Yes / No
Switch Type	Slide



# <u>LXT</u> BRUSHLESS

# KEN XCS03Z

# 18V LXT® Brushless Threaded Rod Cutter

Blade Configuration	Double sided
Max. Cutting Capacity	3/8"
Min. Cutting Capacity	1/4"
Battery	18V LXT® Lithium-Ion
Overall Length	7-7/8"



### **Metal Cutting Diamond Blades**

- Specially designed to handle the extreme power of gas power cutters in the most demanding of applications
- Diamond coated segments for fast cutting and long life



# Abrasive Cutting Wheels

- Designed for cutting in concrete, stone, masonry, asphalt, ferrous metals and more
- · Industrial quality for long life



### **Carbide Metal Cutting Blade** Steel / Ferrous Metal

- Ultra-thin kerf design provides smoother cuts with less drag on the motor and minimal material loss
- · Fully hardened and expertly hand-tensioned steel saw plates for true cuts



**Cutter Kit** 

# **Carbide Metal Cutting Blade**

- · Anti-vibration laser cut slots engineered to reduce noise and vibration to deliver smoother cutting
- Carbide tip is engineered to reduce heat build-up and provide longer blade life





### **Carbide Metal Cutting Blade** Aluminum

- · Perfectly tensioned, hardened steel plates for flat and true run
- Carbide-tipped tooth design lasts 50X longer than abrasives and provides burr-free cutting





# PV7001C

### 7" Vertical Polisher

Sanding Disc	7"
Wool Bonnet	7"
No Load Speed	600 RPM
No Load Speed (variable speed)	600 - 2,000 RPM
Spindle Thread	5/8" - 11 UNC



# 9227C

### 7" Polisher

Sanding Disc	7"
Wool Bonnet	7"
No Load Speed (variable speed)	0 - 3,200 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	10



## 9237C

### 7" Polisher

Sanding Disc	7"
Wool Bonnet	8"
No Load Speed (variable speed)	0 - 3,200 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	10



# 9237CX3

### 7" Polisher

Sanding Disc	7"
Wool Bonnet	8"
No Load Speed (variable speed)	0 - 3,200 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	10





# PK5011CX1

### 5" Electronic Stone Polisher

Disc Size (in.)	5"
No Load Speed (variable speed)	2,000 - 5,500 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	11
Overall Length	18-1/2"



# PW5001C

### 4" Electronic Stone Polisher

Polishing Disc	4"
No Load Speed (variable speed)	2,000 - 4,000 RPM
Spindle Thread	5/8" - 11 UNC
AMPS	7.9
Overall Length	14-1/8"



# P05000C

### 5" Dual Action Random Orbit Polisher

Pad Size (round)	5"
AMPS	7.8
No Load Speed (variable speed)	0 - 780 RPM
Orbits Per Minute (variable speed)	0 - 6,800 OPM
Orbit Diameter	7/32"



# P05000CX2

### 5" Dual Action Random Orbit Polisher

Pad Size (round)	5"
AMPS	7.8
No Load Speed (variable speed)	0 - 780 RPM
Orbits Per Minute (variable speed)	0 - 6,800 OPM
Orbit Diameter	7/32"



# 5402NA

# 16-5/16" Circular Saw

Blade Diameter	16-5/16"
Arbor	1"
Max. Cutting Capacity:	90° (6-3/16"), 45° (4-3/16")
No Load Speed	2,300 RPM
Watts Out	1,800



# 10-1/4" Circular Saw

Blade Diameter	10-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (3-3/4"), 45° (2-3/4")
No Load Speed	3,800 RPM
Watts Out	2.100



HS0600

# 10-1/4" Circular Saw

Blade Diameter	10-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (3-13/16"), 45° (2-11/16")
No Load Speed	4,300 RPM
Watts Out	1.900



# 5008MGA

# 8-1/4" Magnesium Circular Saw

Blade Diameter	8-1/4'
Arbor	5/8'
Max. Cutting Capacity:	90° (3"), 45° (2-1/4"), 50° (2"
No Load Speed	5,200 RPN
Watts Out	2,300



# 5007MG / 5007MGA

# 7-1/4" Magnesium Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-1/2"), 45° (1-3/4"), 56° (1-3/8")
No Load Speed	5,800 RPM
Watts Out	2,300





# 5007F / 5007FA

# 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-3/8"), 45° (1-3/4")
No Load Speed	5,800 RPM
Watts Out	2,000



# 5007NK

# 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-1/2"), 45° (1-3/4"), 56° (1-3/8")
No Load Speed	5,800 RPM
Watts Out	2,300



# HS7600

# 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-1/2"), 45° (1-5/8")
No Load Speed	5,200 RPM
Watts Out	1,400



### HS7610

### 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-1/2"), 45° (1-3/4")
No Load Speed	5,500 RPM
Watts Out	1,600



### 5057KB

### 7-1/4" Circular Saw, w/ Dust Collector

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacity:	90° (2-3/8"), 45° (1-3/16")
No Load Speed	5,800 RPM
Watts Out	2,100



# 5377MG

### 7-1/4" Magnesium Hypoid Saw

7-1/4"
5/8"
90° (2-3/8"), 45° (1-3/4"), 50° (1-9/16")
4,500 RPM
2,300



### 5477NB

### 7-1/4" Hypoid Saw

7-1/4"
5/8"
90° (2-3/8"), 45° (1-3/4"), 50° (1-9/16")
4,500 RPM
2,300



LXT BRUSHLESS



XSH07ZU

# 18V X2 LXT<sup>®</sup> (36V) Brushless 7-1/4" Circular Saw Kit, AWS™ Capable

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities: 90° (2	2-5/8"), 50° (1-5/16"), 45° (1-13/16")
No Load Speed	6,000 RPM
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XSH06PT

XSH06Z

# 18V X2 LXT® (36V) Brushless 7-1/4" Circular Saw Kit

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-5/8"), 50° (1-5/16"), 45° (1-13/16")
No Load Speed	6,000 RPM
Battery	2X 18V LXT® Lithium-Ion



LXT X2 FEV + FEV 36V

XSH01PT XSH01Z

# 18V X2 LXT® (36V) 7-1/4" Circular Saw

Blade Diameter	7-1/4"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-5/8"), 50° (1-11/16"), 45° (1-7/8")
No Load Speed	4,800 RPM
Battery	2X 18V LXT® Lithium-Ion



# LXT BRUSHLESS

XSH03T XSH03Z

### 18V LXT® Brushless 6-1/2" Circular Saw Kit

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-1/4"), 50° (1-7/16"), 45° (1-5/8")
No Load Speed	5,000 RPM
Battery	18V LXT® Lithium-Ion



**WM** XSH05ZB

### 18V LXT® Sub-Compact Brushless 6-1/2" Circular Saw, AWS™ Capable

Blade Diameter	6-1/2"
Arbor	5/8'
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-5/8")
No Load Speed	5,000 RPN
Battery	18V LXT® Compact Lithium-lor



LXT BRUSHLESS

KSH04RB	XSH04ZB	7.

### 18V LXT® Sub-Compact Brushless 6-1/2" Circular Saw Kit

Blade Diameter	6-1/2"
Arbor	5/8"
No Load Speed	5,000 RPM
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-5/8")
Overall Length	10-5/8"



SP6000J / SP6000J1

# 6-1/2" Plunge Circular Saw

Blade Diameter	6-1/2"
Arbor (mm)	20 mm
Max. Cutting Capacity:	90° (2-3/16"), 45° (1-9/16")
No Load Speed (variable speed)	2,000 - 5,200 RPM
Watts Out	1,800



# **CORDLESS PLUNGE SAW BLADES**

B-57342 6-1/2" 56T C.T. Cordless Plunge Saw Blade, Wood, MDF, Laminate



6-1/2" 48T C.T. Cordless Plunge Saw Blade, Corian



**A-99932** 6-1/2" 48T C.T. Cordless Plunge Saw Blade, Wood



A-99960

6-1/2" 28T C.T. Cordless Plunge Saw Blade, Wood



A-99976

6-1/2" 56T C.T. Cordless



6-1/2" 60T (ATB) C.T. Cordles Plunge Saw Blade, MDF











XPS02PTU XPS02ZU 18V X2 LXT® (36V) Brushless 6-1/2"

Plunge Circular Saw Kit, AWS

Blade Diameter Arbor (mm) 20 mm Max. Cutting Capacities: 90° (2-3/16"), 45° (1-9/16") No Load Speed (variable speed) 2,500 - 6,300 RPM Battery 2X 18V LXT® Lithium-Ion



XPS01PTJ

XPS01Z

### 18V X2 LXT® (36V) Brushless 6-1/2" Plunge Circular Saw Kit

Blade Diameter	6-1/2"
Arbor (mm)	20 mm
Max. Cutting Capacities:	90° (2-3/16"), 45° (1-9/16")
No Load Speed (variable speed)	2,500 - 6,300 RPM
Battery	2X 18V LXT® Lithium-Ion

XSS01T XSS01Z 18V LXT® 6-1/2" Circular Saw Kit

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities:	90° (2-1/4"), 45° (1-9/16")
No Load Speed	3,700 RPM
Battery	18V LXT® Lithium-Ion



# **CIRCULAR SAWS**



# XSS03Z

### 18V LXT® 5-3/8" Circular Trim Saw

Blade Diameter	5-3/8"
Arbor	5/8"
Max. Cutting Capacities:	90° (2"), 45° (1-3/8")
No Load Speed	3,600 RPM
Battery	18V LXT® Lithium-Ion



# (BRAKE)

# 5005BA

### 5-1/2" Circular Saw

Blade Diameter	5-1/2"
Arbor	5/8"
Max. Cutting Capacity:	90° (1-3/4"), 45° (1-3/16")
No Load Speed	8,000 RPM
Watts Out	1.050

# **RECIPRO SAWS**





# JR3070CT / JR3070CTZ AVT® Recipro Saw - 15 AMP

Length of Stroke		1-1/4"
Strokes Per Minute	e (variable speed)	0 - 2,800 SPM
AMPS		15
Overall Length		19-1/8"
Net Weight	JR3070CT (9.7 lbs.)	. JR3070CTZ (9.6 lbs.)







# JR3070CTH

### AVT® Recipro Pallet Saw - 15 AMP with **High Torque Limiter**

Length of Stroke	1-1/4"
Strokes Per Minute (variable speed)	0 - 2,800 SPM
AMPS	15
Overall Length	19-1/8"
Net Weight	9.7 lbs.





# JR3050T Recipro Saw - 11 AMP

Length of Stroke	1-1/8'
Strokes Per Minute (variable speed)	0 - 2,800 SPN
AMPS	11
Overall Length	17-3/4'
Net Weight	7.3 lbs



# LXT BRUSHLESS

RJ06PT	XRJ062

# 18V X2 LXT® (36V) Brushless Recipro Saw Kit

Length of Stroke			1-1/4"
Max. Cutting Capacities:	Wood w/ 12	2" blade (10"),	Pipe (5-1/8")
Strokes Per Minute (var. 2	spd.)	0 - 2,300 / 0	- 3,000 SPM
Overall Length			17-3/4"
Battery		2X 18V LXT	® Lithium-lon



# LXT BRUSHLESS

XRJ05T	XRJ05Z	74

## 18V LXT® Brushless Recipro Saw Kit

Length of Stroke	1-1/4"
Max. Cutting Capacities:	Wood w/ 12" blade (10"), Pipe (5-1/8")
Strokes Per Minute (var. 2	spd.) 0 - 2,300 / 0 - 3,000 SPM
Overall Length	17-1/4"
Battery	18V LXT® Lithium-Ion



LXT BRUSHLESS

# XRJ07R1B

# XRJ07ZB

# 18V LXT® Sub-Compact Brushless Recipro Saw Kit

Length of Stroke		13/16"
Max. Cutting Capacities:	Wood w/ 12" b	lade (10"), Pipe (5-1/8")
Strokes Per Minute (variat	ole speed)	0 - 3,000 SPM
Overall Length		12-1/2"
Battery	18V LX	T® Compact Lithium-Ion







# **18V LXT® Compact Recipro Saw Kit**

Length of Stroke	1/2"
Max. Cutting Capacities:	Wood (2"), Pipe (2")
Strokes Per Minute (variable speed)	0 - 3,000 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	15-5/8"



# 4350FCT

## **Top Handle Jig Saw**

Length of Stroke	1"
Max. Cutting Capacity (90°): Wood (5-5/16"), Steel (3.	/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	800 - 2,800 SPM
Blade Shank	"T" Tang
AMPS	6.3



# XVJ02Z

**JIG SAWS** 

## 18V LXT® Brushless Jig Saw

LXT BRUSHLESS

Length of Stroke	1"
Max. Cutting Capacities (90°): Wood (5-5/16"), Mild Steel (	3/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	800 - 3,500 SPM
Blade Shank	"T" Tang
Battery	18V LXT® Lithium-Ion



XVJ03

Tool only, battery & charger not included

	_
XVJ03Z	$\mathbf{Z}$

3.0.

# 18V LXT® Jig Saw Kit

Length of Stroke	1"
Max. Cutting Capacities (90°): Wood (5-5/16"), Steel (3	/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	0 - 2,600 SPM
Blade Shank	"T" Tang
Battery	18V LXT® Lithium-Ion



# JV0600K

### **Top Handle Jig Saw**

Length of Stroke	7/8"
Max. Cutting Capacity (90°):	Wood (3-1/2"), Steel (3/8")
Strokes Per Minute (variable speed)	500 - 3,100 SPM
Blade Shank	"T" Tang
AMPS	6.5



### **Top Handle Jig Saw**

Length of Stroke	11/16"
Max. Cutting Capacity (90°):	Wood (2-9/16"), Steel (1/4")
Strokes Per Minute (variable speed)	500 - 3,100 SPM
Blade Shank	"T" Tang
AMPS	3.9



# 4351FCT

### **Barrel Grip Jig Saw**

Length of Stroke	1"
Max. Cutting Capacity (90°): Wood (5-5/16"), Steel (3.	/8"), Aluminum (25/32")
Strokes Per Minute (variable speed)	800 - 2,800 SPM
Blade Shank	"T" Tang
AMPS	6.3



# XVJ01Z

### 18V LXT® Brushless Barrel Grip Jig Saw

1"
3"), Aluminum (25/32")
800 - 3,500 SPM
"T" Tang
18V LXT® Lithium-Ion

# CIRCULAR SAWS / RECIPRO SAWS / JIG SAWS / MITER SAWS & JOBSITE STANDS



### LS1219L

### 12" Dual-Bevel Sliding Compound Miter Saw with Stand

Blade Diameter	12"
Arbor	1"
Max. Cutting Capacities: Miter 90° (3-5/8" x 15	5"), Miter 45°, L/R 3-5/8" x 10-1/2"
No Load Speed	3,200 RPM
Dimensions (LxWxH)	35-1/4" x 26-1/8" x 28-1/2"



# LXT BRUSHLESS (RAK) **XSLO4PTU**



# 18V X2 LXT® (36V) Brushless 10" Dual-Bevel Sliding Compound Miter Saw Kit, AWS™

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities (Miter) 90° (2-13/16"	: x 12"), 45° L/R (2-13/16" x 8-1/2")
No Load Speed	4,400 RPM
Battery	2X 18V LXT® Lithium-Ion



### XSL02Z

# 18V X2 LXT® (36V) Brushless 7-1/2" Dual Slide Compound Miter Saw

Blade Diameter	7-1/2"
Arbor	5/8"
Max. Cutting Capacities (Mi 90° (2-1/16'	ter): ' x 11-3/4"), 45° L/R (2-1/16" x 8-3/8")
No Load Speed	5,700 RPM
Battery	2X 18V L XT® Lithium-lon



### 12" Dual-Bevel Sliding Compound Miter Saw

Blade Diameter	12"
Arbor	1"
Max. Cutting Capacities: Miter 90° (3-5/8" x 15	5"), Miter 45°, L/R (3-5/8" x 10-1/2")
No Load Speed	3,200 RPM
Dimensions (LxWxH)	35-1/4" x 26-1/8" x 28-1/2"



# XSL06PT

# 18V X2 LXT® (36V) Brushless 10" Dual-Bevel Sliding Compound Miter Saw Kit

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capaciti 90°	es (Miter): (2-13/16" x 12"), 45° L/R (2-13/16" x 8-1/2")
No Load Speed	4,400 RPM
Battery	2X 18V LXT® Lithium-lon



# XSL05Z

# 18V LXT® Brushless 6-1/2" Compact Dual-Bevel Compound Miter Saw

Blade Diameter	6-1/2"
Arbor	5/8"
Max. Cutting Capacities (Miter): 90° (1-13/16" x 3-5	/8"), 45° L/R (1-13/16" x 2-9/16")
No Load Speed	5,000 RPM
Battery	18V LXT® Lithium-Ion



# LS1019LX

### 10" Dual-Bevel Sliding Compound Miter Saw with Stand

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (2-13/16" x 12"), Miter	45°, L/R (2-13/16" x 8-1/2")
No Load Speed	3,200 RPM
Dimensions (LxWxH)	31-3/4" x 25-3/8" x 26"



# LS1018

### 10" Dual Slide Compound Miter Saw

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (3-5/8" x 12"), M	Niter 45°, L/R (3-5/8" x 8-1/2")
No Load Speed	4,300 RPM
AMPS	13
	0.



# LS1221

### 12" Compound Miter Saw

Blade Diameter	12"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (3-7/8" x 6"), M	Miter 45°, L/R (2-3/4" x 5-7/8")
No Load Speed	4,000 RPM
AMPS	15



# 10" Dual-Bevel Sliding Compound Miter

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (2-13/16" x 12"), M	Miter 45°, L/R (2-13/16" x 8-1/2")
No Load Speed	3,200 RPM
Dimensions (LxWxH)	31-3/4" x 25-3/8" x 26"



### LS0815F

### 8-1/2" Slide Compound Miter Saw

Blade Diameter	8-1/2"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (2-9/16"	x 12"), Miter 45°, L/R (2-9/16" x 8-1/2")
No Load Speed	5,000 RPM
AMPS	10.5



# LS1040

### 10" Compound Miter Saw

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities: Miter 90° (2-3/4" x 5-1/8"), Miter 45°, L	/R (1-3/8" x 3-5/8")
No Load Speed	4,600 RPM
AMPS	15

# JOBSITE MITER SAW STANDS



### **Compact Folding Miter Saw Stand**

1
No
100-1/2"
Yes
Yes



### **Portable Rise Miter Saw Stand**

Table Height Positions (Adjustable)	2
Spring Loading Mechanism	Yes
Material Support Extensions (L)	106-1/2"
In-Feed Roller	Yes
Material Stop	Yes



### **Large Rising Base Miter Saw Stand**

Table Height Positions (Adjustable)	5
Spring Loading Mechanism	Yes
Material Support Extensions (L)	108"
In-Feed Roller	Yes
Material Stop	Yes



### 12" Portable Planer

Cutting Capacity (width)	12"
Cutting Capacity (depth)	1/8"
Cutting Capacity (thickness)	6-3/32"
No. of Knives	2
Table Size (WxL)	12" x 30-3/8"





### 10" Table Saw with Stand

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities:	90° (3-5/8"), 45° (2-1/2")
No Load Speed	4,800 RPM
AMPS	15



# 2705

### 10" Table Saw

Blade Diameter	10"
Arbor	5/8"
Max. Cutting Capacities:	90° (3-5/8"), 45° (2-1/2")
No Load Speed	4,800 RPM
AMPS	15

# **MULTI-TOOLS**




# TM3010CX1

### **Multi-Tool Kit**

Oscillations Per Minute	6,000 - 20,000 OPM
Oscillation Angle	3.2°
AMPS	3
Overall Length	11-1/8"
Net Weight	3.5 lbs.



<u>LXT</u>



### 18V LXT® Multi-Tool Kit

OPN
3.29
-3/8
.9 lbs
m-lor



# RP2301FC

### 3-1/4 HP\* Plunge Router

Collet Capacity	1/2", 1/4"
Plunge Capacity	2-3/4"
No Load Speed (variable speed)	9,000 - 22,000 RPM
AMPS	15
Maximum Horsepower	3-1/4 HP



# RP1800

### 3-1/4 HP\* Plunge Router

Collet Capacity	1/2", 1/4"
Plunge Capacity	2-3/4"
No Load Speed	22,000 RPM
AMPS	15
Maximum Horsepower	3-1/4 HP



# RP0900K

### 1-1/4 HP\* Plunge Router

Collet	1/4"
Plunge Capacity	1-3/8"
No Load Speed	27,000 RPM
AMPS	8
Maximum Horsepower	1-1/4 HP



# RF1101KIT2

### 2-1/4 HP\* Router Kit, with Plunge Base

Collet Capacity	1/2", 1/4"
Plunge Capacity	2-19/32"
No Load Speed (variable speed)	8,000 - 24,000 RPM
AMPS	11
Maximum Horsepower	2-1/4 HP



# RF1101

# 2-1/4 HP\* Router

Collet Capacity	1/2", 1/4"
No Load Speed (variable speed)	8,000 - 24,000 RPM
Overall Length	8-3/4"
AMPS	11
Maximum Horsepower	2-1/4 HP



RD1101

# 2-1/4 HP\* Router

Collet Capacity	1/2", 1/4"
No Load Speed (variable speed)	8,000 - 24,000 RPM
Overall Length	8-3/4"
AMPS	11
Maximum Horsepower	2-1/4 HP



RT0701CX3

# 1-1/4 HP\* Compact Router Kit

Collet	1/4"
Plunge Capacity	1-3/8"
No Load Speed (variable speed)	10,000 - 30,000 RPM
AMPS	6.5
Maximum Horsepower	1-1/4 HP



# 1-1/4 HP\* Compact Router Kit

Collet	1/4'
Plunge Capacity	1-3/8'
No Load Speed (variable speed)	10,000 - 30,000 RPM
AMPS	6.5
Maximum Horsepower	1-1/4 HF



# RT0701C

### 1-1/4 HP\* Compact Router

Collet	1/4"
No Load Speed (variable speed)	10,000 - 30,000 RPM
Overall Length	7-7/8"
AMPS	6.5
Maximum Horsepower	1-1/4 HP



## XTR01T7

# XTR01Z **18V LXT® Brushless Compact Router Kit**

Collet	1/4"
No Load Speed (variable speed)	10,000 - 30,000 RPM
Battery	18V LXT® Lithium-lon
Overall Length	5-1/4"



# XTR01T8J

**Starter Kit** 

# 18V LXT® Brushless Compact Router

### No Load Speed (variable speed) 10,000 - 30,000 RPM Battery 18V LXT® Lithium-Ion Overall Length 5-1/4" Net Weight (with battery) 4.6 lbs.




<u>LXT</u>.BRUSHLESS

Tool only, battery & charger not included

# XTR01Z

### **18V LXT® Brushless Compact Router**

Collet	1/4"
No Load Speed (variable speed)	10,000 - 30,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	5-1/4"
Net Weight (with battery)	4.6 lbs.



# GET SERVICE



View your product detail page online at makitatools.com to download parts breakdowns and owners manuals for your tools. Makita's network of service centers ensure complete satisfaction on every product that we manufacture.

LOCATE NEAREST SERVICE CENTER:
MAKITATOOLS.COM/SERVICE

1-800-4-MAKITA (625482)



# LAMINATE TRIMMER



3709 1/4" Fixed Base Laminate Trimmer

Collet	1/4"
No Load Speed	30,000 RPM
AMPS	4
Overall Length	7-7/8"
Net Weight	3.3 lbs.

# SANDERS / BELT SANDERS



### B06050J

### 6" Random Orbit Sander

Pad Size (round)	6"
Abrasive Disc Size	6"
Orbits Per Minute (variable speed)	1,600 - 6,800 OPM
Orbit Diameter	7/32"
AMPS	6.6



### B06030

## 6" Random Orbit Sander

Pad Size (round)	6"
Abrasive Disc Size	6"
Orbits Per Minute (variable speed)	4,000 - 10,000 OPM
Orbit Diameter	1/8"
AMPS	2.7



B05030 / B05030K

### 5" Random Orbit Sander

Pad Size (round)	4-13/16"
Abrasive Disc Size	5"
Orbits Per Minute	12,000 OPM
Orbit Diameter	1/8"
AMPS	3



# B05031K

## 5" Random Orbit Sander, with Case

Pad Size (round)	4-13/16
Abrasive Disc Size	5
Orbits Per Minute (variable speed)	4,000 - 12,000 OPN
Orbit Diameter	1/8
AMPS	;



# B05041 / B05041K

# 5" Random Orbit Sander, Variable Speed

Pad Size (round)	4-13/16"
Abrasive Disc Size	5"
Orbits Per Minute (variable speed)	4,000 - 12,000 OPM
Orbit Diameter	1/8"
AMPS	3



72117 <sub>0</sub>	
XOBO1T	XOBO1Z

5.0..

# 18V LXT® 5" Random Orbit Sander Kit

Pad Size (round)	5"
Abrasive Disc Size	5"
Orbits Per Minute (3 speed)	7,000, 9,500, 11,000 OPM
Orbit Diameter	1/8"
Battery	18V LXT® Lithium-Ion



# B04556 / B04556K

## 1/4 Sheet Finishing Sander

Pad Size	4-1/2" x 4"
Abrasive Paper Size	4-1/2"x 5-1/2"
Orbits Per Minute	14,000 OPM
AMPS	2
Vibration (m/s²)	4



# B03710

### 1/3 Sheet Finishing Sander

Pad Size	3-5/8" x 7-1/4"
Abrasive Paper Size	3-5/8"x 9"
Orbits Per Minute	11,000 OPM
AMPS	1.7
Vibration (m/s²)	3.5



# B04900V

### 1/2 Sheet Finishing Sander

Pad Size	4-1/2" x 9"
Abrasive Paper Size	4-1/2"x 11"
Orbits Per Minute (variable speed)	4,000 - 10,000 OPM
AMPS	2.9
Vibration (m/s²)	5



### 9032

### 3/8" x 21" Belt Sander

Belt Size	3/8" x 21"
Belt Speed (variable speed)	980 - 5,600 ft./min.
AMPS	4.4
Overall Length	16-1/2"
Net Weight	3.5 lbs.



### 1-1/8" x 21" Belt Sander

Belt Size	1-1/8" x 21"
Belt Speed (variable speed)	656 - 3,280 ft./min.
AMPS	5
Overall Length	15"
Net Weight	4.6 lbs.



# **SANDERS**









### 3" x 21" Belt Sander

Belt Size	3" x 21"
Belt Speed (variable speed)	690 - 1,440 ft./min.
AMPS	8.8
Overall Length	11-5/8"
Net Weight	9.5 lbs.



### 3" x 24" Belt Sander

Belt Size	3" x 24"
Belt Speed (variable speed)	690 - 1,440 ft./min.
AMPS	8.8
Overall Length	13-1/8"
Net Weight	9.9 lbs.



1002BA

Planing Width

Planing Depth

No Load Speed AMPS

Overall Length

4-3/8" Curved Base Planer

### 3" x 24" Belt Sander

Belt Size	3" x 24"
Belt Speed	1,300 ft./min.
AMPS	7.8
Overall Length	14"
Net Weight	10.6 lbs.

### 4" x 24" Belt Sander

Belt Size	4" x 24"
Belt Speed (variable speed)	690 - 1,440 ft./min.
AMPS	8.8
Overall Length	13-1/8"
Net Weight	10.3 lbs.





### 4" x 24" Belt Sander

9403

Belt Size	4" x 24"
Belt Speed	1,640 ft./min.
AMPS	11
Overall Length	13-7/8"
Net Weight	12.6 lbs.





# 9741

### **Wheel Sander**

Wheel Size (width x diameter)	4-3/4" x 4"
No Load Speed	3,500 RPM
AMPS	7.8
Overall Length	12-1/4"
Net Weight	9.3 lbs.





# KP0800K

4-3/8"

3/16" 15,000 RPM

> 9.6 13-11/32"

### 3-1/4" Planer, with Case

Planing Width	3-1/4"
Planing Depth	3/32"
No Load Speed	17,000 RPM
AMPS	6.5
Overall Length	11-1/4"



# KP0810

# 3-1/4" Planer

Planing Width	3-1/4"
Planing Depth	5/32"
No Load Speed	16,000 RPM
AMPS	7.5
Overall Length	11-3/8"



# LXT XPK01Z

# 18V LXT® 3-1/4" Planer

Planing Width	3-1/4"
Planing Depth	5/64"
No Load Speed	14,000 RPM
Overall Length	13-1/8"
Net Weight (with battery)	17.4 lbs.



# 1912B

Tool only, battery & charger not included

## 4-3/8" Planer

Plan	ing Width	4-3/8"
Plan	ing Depth	1/16"
No L	oad Speed	16,000 RPM
AMP	S	7.5
Over	all Length	14"



# 1806B

# 6-3/4" Planer

Planing Width	6-3/4"
Planing Depth	1/16"
No Load Speed	15,000 RPM
AMPS	10.9
Overall Length	20-3/4"



# KP312

### 12-1/4" Planer

Planing Width	12-1/4"
Planing Depth	1/8"
No Load Speed	12,000 RPM
AMPS	15
Overall Length	21-3/4"



# PJ7000

### **Plate Joiner**

4"
3/4"
RPM
5.6
-7/8"



# XJP03Z

# 18V LXT® Plate Joiner

Blade Diameter	4"
Max. Cutting Depth	3/4"
No Load Speed	12,000 RPM
Overall Length	13-3/4"
Battery	18V LXT® Lithium-Ion

# PLATE JOINER ACCESSORIES

### 123148-2 **Angle Guide**

For making angled joint cuts

Easy to adjust depth and angle settings



### 415579-2 **Set Plate**

• For cutting slots in thin work pieces

Installs quickly and easily



### 123150-5 **Dust Bag**

For collecting dust while make joint cuts

• Installs quickly and easily



# SANDERS / PLANERS / PLATE JOINERS / WOODWORKING / COMPRESSORS

# WOODWORKING MISCELLANEOUS



### 98202

### **Blade Sharpener**

Wheel Size	7-7/8"
No Load Speed	560 RPM
AMPS	1.1
Overall Length	15-3/8"
Net Weight	24.3 lbs.



# 7104L

### **Chain Mortiser**

Max. Hole Width:	Longitudinal (5-1/8"), Transverse (1-1/4")
Max. Hole Depth	6-1/8"
No Load Speed	3,200 RPM
Chain Speed	1,000 FPM
AMPS	10.5



### **UB1103**

### **Blower**

AMPS	6.8
Max. Air Volume	145 CFM
Max. Air Velocity	203 MPH
No Load Speed (variable speed)	0 - 16,000 RPM
Overall Length	18-7/8"



### **Blade Sharpener Accessories**



A-24620 A-24614 A-24636 **Grinding Wheels** 



192612-4 **Guide Assembly** 

## **Mortiser Chain**

- Razor sharp edges for clean and accurate cutting
- Ideal for cutting notches or holes in thick wood stock



19/32" **A-16564** 21/32" **A-16570** 23/32" **A-16586** 







# **Variable Temperature Heat Gun**

Air Temperature (var. speed)	122° - 1,022° F
Air Volume (2 speed)	7 and 14 CFN
Temperature Control Dial	Yes
AMPS	13
Watts (AC only)	1,800



### Variable Temperature Heat Gun Kit with LCD Digital Display

Air Temperature (var. speed)	122° - 1,202° F
Air Volume (2 speed)	10 and 17.6 CFM
Temperature Control Dial	No
AMPS	13
Watts (AC only)	2,000







# MAC5501G

### 5.5 HP\* Big Bore™ Gas Air Compressor

Maximum Horsepower	5-1/2 HP
Running Horsepower	5.5 HP
Tank	10 gal.
Performance:	40 PSI (14 CFM), 90 PSI (12.5 CFM)
Maximum Pressure	135 PSI



# **PERFORMANCE**

Powerful Honda GX160 4-stroke engine for increased performance and superior reliability



PR0000034

1-3/8" Welding Nozzle (Use with PR00000039)

# **MAC5200**

### 3.0 HP\* Big Bore™ Air Compressor

Maximum Horsepower	3 HP
Running Horsepower	2.1 HP
Tank	5.2 gal.
Performance:	40 PSI (6.9 CFM), 90 PSI (6.5 CFM)
Maximum Pressure	140 PSI



# **MAC2400**

Maximum Pressure

2.5 HP\* Big Bore™ Air Compressor

Maximum Horsepower	2-1/2 HP
Running Horsepower	2.1 HP
Tank (twin stacked)	4.2 gal.
Performance:	40 PSI (4.8 CEM) 90 PSI (4.2 CEM)



### 2.0 HP\* Big Bore™ Air Compressor

Maximum Horsepower	2 HP
Running Horsepower	1.7 HP
Tank	2.6 gal.
Performance:	40 PSI (3.8 CFM), 90 PSII (3.3 CFM)
Maximum Pressure	130 PSI



### AC001

### **Compact Air Compressor**

Motor	1/6 HP
Running Horsepower	1/6 HP
Tank	1 gal.
Performance:	40 PSI (.58 CFM), 90 PSI (.45 CFM)
Maximum Pressure	125 PSI



### **AC310H**

### 2.5 HP\* High Pressure Air Compressor

Maximum Hor	sepower	2-1/2 HP
Running Horse	epower	1.9 HP
Tank		1.6 gal.
Performance:	40 PSI (3.7 CFM), 90 PSI (3.6 CFM	1), 300 PSI (2.7 CFM)
Maximum Pressure 400 PSI		



# GET REGISTERED

Register your products and keep them in one safe place, your own Tool Box. It is where you can go to obtain your tool model numbers and serial numbers in the event your tool is stolen or needs service.



130 PSI



# **NAILERS & STAPLERS**





# AN635H

# 2-1/2" High Pressure Siding Coil Nailer

Power Type	Pneumatio
Operating Air Pressure	170 - 320 PS
Minimum Recommended Air Delivery	3.5 SCFM @ 250 PS
Nail Size 1-1/4" - 2-1/2" .99"113" shank dia	ameter plastic & wire collated
Maximum Magazine Capacity	400



PNEUMATICS

# MIM AN454

### 1-3/4" Coil Roofing Nailer

Power Type	Pneumatic
Operating Air Pressure	70 - 120 PSI
Minimum Recommended Air Delivery	3.7 SCFM @ 90 PSI
Nail Size	3/4" - 1-3/4"
Maximum Magazine Capacity	120



PNEUMATICS Mr AF506

# 2" Brad Nailer, 18 Gauge

Power Type	Pneumatic
Operating Air Pressure	70 - 120 PSI
Minimum Recommended Air Delivery	1.5 SCFM @ 90 PSI
Nail Size	5/8" to 2" (18 ga.)
Maximum Manazine Canacity	100



PNEUMATICS

AT2550A

# 1" Wide Crown Stapler

Power Type	Pneumatic
Operating Air Pressure	65 - 120 PSI
Minimum Recommended Air Delivery	2.3 SCFM @ 90 PSI
Crown	1"
Gauge	16



MAN924

# 21° Full Round Head 3-1/2" Framing

Power Type	Pneumatio
Operating Air Pressure	70 - 120 PS
Minimum Recommended Air Delivery	6.2 SCFM @ 90 PS
Nail Size 2"-3-1/2" .113"148" shank	diameter plastic collated
Maximum Manazine Canacity	79



PNEUMATICS

### AF635

### 2-1/2" Angled Finish Nailer, 15 Gauge

Power Type		Pneumatic
Operating Air Pressure		70 - 120 PSI
Minimum Recommended Air De	livery	3.4 SCFM @ 90 PSI
Nail Size	1-1/4"	to 2-1/2" (15 ga. DA style)
Maximum Magazine Capacity		100



XNB01Z

18 GAUGE

# 18V LXT® 2" Brad Nailer, 18 Gauge

Power Type	Cordless
Battery	18V LXT® Lithium-Ion
Nail Size	5/8" to 2" (18 ga.)
Maximum Magazine Capacity	100
Fastening category	Brad



PNEUMATICS

# AT1150A

### 7/16" Medium Crown Stapler

Power Type	Pneumatic
Operating Air Pressure	65 - 120 PSI
Minimum Recommended Air Delivery	2.5 SCFM @ 90 PSI
Crown	7/16"
Gauge	16



### 3-1/2" Framing Coil Nailer

Power Type	Pneumatic
Operating Air Pressure	60 - 120 PSI
Minimum Recommended Air Delivery	5.6 SCFM @ 90 PSI
Nail Size1-3/4" - 3-1/2" .099"148" shank diameter wire collated	
Maximum Magazine Capacity	300



PNEUMATICS

# AF601

### 2-1/2" Straight Finish Nailer, 16 Gauge

Power Type	Pneumatic
Operating Air Pressure	70 - 120 PSI
Minimum Recommended Air Delivery	2.7 SCFM @ 90 PSI
Nail Size	1" to 2-1/2" (16 ga.)
Maximum Magazine Capacity	100



AF353

# 1-3/8" Pin Nailer, 23 Gauge

Power Type		Pneumatic
Operating Air Pressu	re	65 - 100 PSI
Minimum Recomme	nded Air Delivery	.9 SCFM @ 90 PSI
Nail Size	5/8", 11/16", ¾",	1", 1-3/16", 1-3/8" (23 ga.)
Maximum Magazine	Capacity	130



PNEUMATICS AT638A

### 1/4" Narrow Crown Stapler, 18 Gauge

Pneumatic
70 - 120 PSI
1.6 SCFM @ 90 PSI
1/4"
18



### **AN611**

**15°** 

## 2-1/2" Siding Coil Nailer

Power Type		Pneumatic
Operating Air Press	ure	65 - 120 PSI
Minimum Recomme	ended Air Delivery	3.6 SCFM @ 90 PSI
Nail Size	1-1/4" - 2-1/2" .080	"099" shank diameter
Maximum Magazine	Capacity	400



LXT

WM XNB02RJ

XNB02Z

### 18V LXT® 2-1/2" Straight Finish Nailer Kit, 16 Ga.

Power Type	Cordless
Fastening category	Finish
Nail Size	1" to 2-1/2" (16 ga.)
Maximum Magazine Capacity	110
Rattery	18V I XT® I ithium-lon



XTP02Z

# 18V LXT® 1-3/8" Pin Nailer, 23 Gauge

Power Type		Cordless
Fastening category		Pin
Nail Size	5/8", 11/16", ¾", 1'	', 1-3/16", 1-3/8" (23 ga.)
Maximum Magazine	Capacity	120
Battery		18V LXT® Lithium-Ion



XTS01T

XTS01Z

### 18V LXT® 3/8" Crown Stapler Kit

Power Type	Cordless
Leg Length	3/8" to 7/8"
Gauge	T50® Style
Maximum Magazine Capacity	98
Battery	18V LXT® Lithium-Ion



# ONE SYSTEM & 200 SOLUTION

From on the ranch to in your home, the Makita LXT® system allows you to use the same battery for dozens of different tasks. With over 200 tools and growing, the LXT® platform is the world's largest 18V lithium-ion lineup and gives the user an unprecendented range of applications using the same batteries.

## **CORDLESS CHAIN SAWS**



## LXT BRUSHLESS

XCU04PT XCU04Z

### 18V X2 (36V) LXT® Brushless 16" Chain Saw Kit

Guide Bar Length	16"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.8 lbs.



	X2 E27 + E27 36Y	
<u>LA 15.</u>	BRUSH	ILESS

XCU07PT XCU07Z

### 18V X2 (36V) LXT® Brushless 14" Chain Saw Kit

Guide Bar Length	14"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.5 lbs.



# LXT BRUSHLESS

XCU03PT XCU03Z

### 18V X2 (36V) LXT® Brushless 14" Chain Saw Kit

Guide Bar Length	14"
Pitch	3/8"
Gauge	.043"
Chain Speed	3,940 FPM
Net Weight (with battery)	11.5 lbs.



# LXT X2 180 + 180 36V

XCU02PT XCU02Z

### 18V X2 (36V) LXT® 12" Chain Saw Kit

Guide Bar Length	12"
duide bai Leligili	12
Pitch	3/8"
Gauge	.043"
Chain Speed	1,650 FPM
Net Weight (with battery)	10.1 lbs.



## LXT BRUSHLESS

**XCU06T** 

### 18V LXT® Brushless 10" Top Handle **Chain Saw Kit**

Guide Bar Length	10"
Pitch	3/8"
Gauge	.043"
Chain Speed	4,720 FPM
Net Weight (with battery)	7.2 lbs.



Tool only, battery & charger not included LXT. XCU01Z

## 18V LXT® 4-1/2" Chain Saw

Guide Bar Length	4-1/2"
Pitch	1/4"
Gauge	.050"
Chain Speed	980 FPM
Net Weight (with battery)	5.4 lbs.

# GAS PERFORMANCE WITHOUT THE HASSLES

Experience new levels of convenience, efficiency and productivity with LXT®, the world's largest 18V lithium-ion cordless tool system. Makita's  $leading \, technology \, gives \, users \, unmatched \, performance \, and \, breadth \, of \, line, \,$ with innovation in motor and battery technology that's leaving old thinking behind. Get over 200 cordless solutions while remaining in a single system powered by the industry's fastest-charging 18V lithium-ion batteries.







## **CORDLESS BLOWERS**



# LXT BRUSHLESS

XBU02PT XBU02Z

### 18V X2 (36V) LXT® Brushless Blower Kit

Max. Air Volume Max. Air Velocity No Load Speed (variable speed) 11,400 - 21,500 RPM 2X 18V LXT® Lithium-lon Battery Sound Pressure (per Ansi B175.2 standard) 61 dB(A)



# 

XBU01Z XBU01PT

### 18V X2 (36V) LXT® Blower Kit

Max. Air Volume	155 CFM
Max. Air Velocity	208 MPH
No Load Speed (2 spd)	10.000/17.000 RPM
Battery	2X 18V I XT® Lithium-lon
Sound Pressure (per Ansi B175.2 standard) 60.6 dB(	



DUB183Z

### 18V LXT® Floor Blower

Max. Air Volume 91 CFM Max. Air Velocity 116 MPH No Load Speed (variable speed) 0 - 18,000 RPM Battery 18V LXT® Lithium-Ion Overall Length 33-1/4"



**DUB182T1** DUB182Z

### 18V LXT® Blower Kit

91 CFM
179 MPH
0 - 18,000 RPM
18V LXT® Lithium-Ion
20-3/4"





LXT BRUSHLESS

XRU09PT

### 18V X2 (36V) LXT® Brushless String Trimmer Kit

Cutting Capacity (diameter)	13-3/4"
No Load Speed (2 spd)	5,000/6,500 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	69"
Net Weight (with battery)	9.9 lbs.



XT BRUSHLESS

Includes 4.0 same

KRU11M1 18V LXT® Brushless String Trimmer Kit

Cutting Capacity (diameter)	11-3/4"
No Load Speed (2 spd)	4,000/6,000 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	70-1/2"
Net Weight (with hattery)	7.4 lhe



**XRU13Z** 

### 18V LXT® Brushless Curved Shaft String Trimmer

Cutting Capacity (diameter)	11-3/4"
No Load Speed (3 spd)	4,000/5,000/6,000 RPM
Arbor Shaft	M8 x 1.25 RH
Overall Length	63-3/4"
Battery	18V LXT® Lithium-Ion



XRU02Z

### **18V LXT® String Trimmer**

Cutting Capacity (diameter)	10-1/4"
No Load Speed	7,800 RPM
Battery	18V LXT® Lithium-Ion
Overall Length	56-1/2"
Net Weight (with battery)	6.4 lbs.

# **ULTIMATE VERSATILITY**

**CORDLESS** -

**COUPLE SHAFT POWER HEADS & ATTACHMENTS** 

# **COUPLE SHAFT SYSTEM**

The Makita® Couple Shaft Series has multiple attachments that are fully compatible with the gas engine or cordless powerhead. Users benefit with the increased efficiency and reduced tool costs of running one powerhead system for multiple applications.





### **PICK YOUR POWER**

# **PICK YOUR ATTACHMENT**



XUX01M5PT XUX01ZM5 18V X2 (36V) LXT® Brushless Couple Shaft

**Power Head Kit with Trimmer Attachment** Cutting Capacity (diameter) No Load Speed (var. 3 spd.) 0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM Battery 2X 18V LXT® Lithium-Ion Overall Length 69" Net Weight (with battery) 17.2 lbs.

FM400MP

Brush Cutter Couple Shaft Attachment Arbor M10 x 1.25LH

String Trimmer Couple Shaft Attachment Arbor M10 x 1.25LH

**EY401MP**Pole Saw Couple Shaft Attachment 10" Bar Length

Hedge Trimmer Couple Shaft Attachment 24" Bar Length

Curved String Trimmer Couple Shaft Attachment Arbor M8 x 1.25LH

**EN401MP**Articulating Hedge Trimmer Couple Shaft Attachment 180° Blade Adjustment 20" Bar Length



<u>LXT</u> BRUSHLESS

XUX01Z

# 18V X2 (36V) LXT® Brushless Couple Shaft Power Head

Shaft Type	Multi-tool attachment
No Load Speed (var. 3 spd.)	0 - 9,700 / 0 - 8,200 / 0 - 5,700 RPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	39-3/4"
Not Weight (with battery)	Q Q lhe



# **EX2650LH**

### 25.4 cc MM4® 4-Stroke Couple Shaft Power Head

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Power Type	4-stroke gas
Fuel Type	Unleaded gas
Fuel Tank Capacity	20.3 oz.



Fits Models

XUX01ZM5.

XUX01Z, EX2650LH

EX2650LH



# Fits Models

XUX01ZM5,

XUX01Z, EX2650LH

**COUPLE SHAFT ATTACHMENTS** 

# KR401MP Cultivator Couple Shaft Attachment 9" Tine Diameter

EE400MP
Edger Couple Shaft Attachment\*
8" Blade Diameter
\*for use with EX2650LH Only LE400MP Shaft Extension Couple Shaft Attachment 42" Length

SW400MP

XUX01ZM5, Paddle Sweep Couple Shaft Attachment 23-1/4" Sweeping Surface

BR400MP Bristle Brush Couple Shaft Attachment 23-5/8" Sweeping Surface



# <u>LXT</u> BRUSHLESS



# XHU07Z



# XHU07T 18V LXT® Brushless 24" Hedge Trimmer Kit

Blade Length	24"
Strokes Per Minute	4,400 SPM
Overall Length	44-1/4"
Battery	18V LXT® Lithium-Ion
Net Weight (without battery)	7.3 lbs.



# <u>LXT</u> BRUSHLESS



# XHU08T 18V LXT® Brushless 30" Hedge Trimmer Kit

Blade Length	30"
Strokes Per Minute	4,400 SPM
Overall Length	49-3/4"
Battery	18V LXT® Lithium-Ion
Net Weight (without battery)	7.7 lbs.



# XT, X2 18V+18V 36V



### XHU04PT 18V X2 (36V) LXT® 25-1/2" Hedge Trimmer Kit

Blade Length	25-1/2"
Strokes Per Minute	1,800 SPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	48-3/4"
Net Weight (with battery)	12.2 lbs.



Includes one battery LXT XHU02M1

### 18V LXT® 22" Hedge Trimmer Kit

Blade Length	22"
Strokes Per Minute	1,350 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	38"
Net Weight (with battery)	7.4 lbs.

### **CORDLESS POWER EQUIPENT MISCELLANEOUS**



Tool only, battery & charger not included LXT

### XMU04Z

### 18V LXT® Grass Shear

Cutting Capacity (width)	6-5/16"
Depth Adjustment Range	9/32", 25/32", 1"
Strokes Per Minute	2,500 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	13-7/8"



<u>| XT | X2 | 180 + 180 360 | </u>

XML02PT	XML02Z	_

### 18V X2 (36V) LXT® 17" Cordless Lawn Mower Kit

<b>Cutting Capacities:</b>	Width (17"), Height Range (13/16" - 2-5/16")
No Load Speed	3,600 RPM
Battery	2X 18V LXT® Lithium-Ion
Dimensions (LxWxH)	58-3/4" x 18-1/8" x 37-1/2"
Net Weight (with batt	tery) 40.8 lbs.



## LXT BRUSHLESS



### 18V X2 LXT® Brushless Power-Assisted Wheelbarrow Kit

Speed Forward (High/Low MPH)	2.5 / 1 MPH
Speed Reverse (MPH)	.62 MPH
Max. Load Capacity	275 lbs.
Max. Grade	12°
Battery	2X 18V LXT® Lithium-Ion



LXT BRUSHLESS

XUC01PTX2

XUC01X2

### 18V X2 LXT® Brushless Power-Assisted **Flat Dolly Kit**

Speed Forward (High/Low MPH)	2.5 / 1 MPH
Speed Reverse (MPH)	.62 MPH
Max. Load Capacity	275 lbs.
Max. Grade	12°
Battery	2X 18V LXT® Lithium-Ion

# 4-STROKE GAS BLOWERS



# EB7660TH

### 75.6 cc MM4® 4-Stroke Engine Tube **Throttle Backpack Blower**

Engine Displacement (cc)	75.6 cc
Engine (HP)	3.8 HP
Max. Air Volume	706 CFM
Max. Air Velocity	206 MPH
Fuel Type	Unleaded das



# EB7660WH

### 75.6 cc MM4® 4-Stroke Engine Hip **Throttle Backpack Blower**

Engine Displacement (cc)	75.6 cc
Engine (HP)	3.8 HP
Max. Air Volume	706 CFM
Max. Air Velocity	206 MPH
Fuel Type	Unleaded gas



# EB5300TH

### 52.5 cc MM4® 4-Stroke Engine Tube Throttle Backpack Blower

Engine Displacement (cc)	52.5 cc
Engine (HP)	2.5 HP
Max. Air Volume	516 CFM
Max. Air Velocity	184 MPH
Fuel Type	Unleaded gas







MM4® 4-stroke unleashes your potential so you can power through jobs without hesitation. No oil mixing, lower costs and reduced emissions mean less stress and more savings. Power and efficiency are on your side—how will you rule the

### **4-STROKE FEATURES**

- · Less costs with improved fuel efficiency and no
- Reduced emissions for cleaner operation
- Fast and easy starts with mechanical automatic engine decompression
- Higher engine torque delivers the power and performance needed to meet the demands of the professional



### **EB5300WH**

### 52.5 cc MM4® 4-Stroke Engine Hip **Throttle Backpack Blower**

52.5 cc
2.5 HP
516 CFM
184 MPH
Unleaded gas



### **BHX2500CA**

# 24.5 cc MM4® 4-Stroke Engine Blower

Engine Displacement (cc)	24.5 cc
Engine (HP)	1.1 HP
Max. Air Volume	356 CFM
Max. Air Velocity	145 MPH
Fuel Type	Unleaded gas



### PM7650H

### 75.6 cc MM4® 4-Stroke Engine Mist **Blower**

Engine Displacement (cc)	75.6 cc
Engine Power	3.67 HP
Tank	3.9 gal.
Max. Air Volume	496 CFM
Max. Air Velocity	190 MPH



# 4-STROKE GAS STRING TRIMMERS



### EMOREOI H

# 25.4 cc MM4® 4-Stroke Engine String

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Cutting Capacity (diameter)	17"
Power Type	4-stroke gas
Fuel Type	Unleaded gas



### FM26521 HN

### 25.4 cc MM4® 4-Stroke Engine High Torque String Trimmer

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Cutting Capacity (diameter)	17"
Power Type	4-stroke gas
Fuel Type	Unleaded gas



### EM2650UH

### 25.4 cc MM4® 4-Stroke Engine Brush Cutter

•	
Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Diameter	9"
Power Type	4-stroke gas
Fuel Type	Unleaded gas



### EE2650H

### 25.4 cc MM4® 4-Stroke Engine Edger

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Length	8"
Arbor	1"
Fuel Type	Unleaded gas

# 4-STROKE GAS COUPLE SHAFT POWER HEADS



# EX2650LH

# 25.4 cc MM4® 4-Stroke Couple Shaft Power Head

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Power Type	4-stroke gas
Fuel Type	Unleaded gas
Fuel Tank Capacity	20.3 oz.





# EY2650H25H

### 25.4 cc MM4® 4-Stroke Engine Telescoping Pole Pruner

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Overall Length	154-1/2"
Guide Bar Length	10"
Fuel Type	Unleaded gas



	Part#	Includes	Fits Models
And the second s	135683-8 Articulating Hedge Trimmer Attachment – 20" Blade Length		
	<b>A-89523</b> Articulating Hedge Trimmer Attachment – 22" Blade Length		EM2650LH, EM2650UH, EM2652LHN.
THE PARTY OF THE PROPERTY OF THE PARTY OF TH	<b>135544-2</b> Double-Sided Hedge Trimmer Attachment – 24" Blade Length	Blade Cover	EM2032LHN, EE2650H, EN4950H, EN4951SH, EN5550SH.
7	<b>135545-0</b> Single-Sided Hedge Trimmer Attachment – 30" Blade Length		EN53503H, EN5950SH, EN7350SH
T	196315-2 Pole Saw Attachment 10" Bar		

## 4-STROKE GAS HEDGE TRIMMERS



# EN4950H

# 20" 25.4 cc MM4® 4-Stroke Engine Articulating Hedge Trimmer

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Length	20"
Blade Speed	4,200 SPM
Fuel Type	sen hahealni i



# EN4951SH

# 20" 25.4 cc MM4® 4-Stroke Engine Articulating Hedge Trimmer

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Length	20"
Blade Speed	4,200 SPM
Fuel Type	Unleaded gas



# EN5950SH

# 24" 25.4 cc MM4® 4-Stroke Engine Double-Sided Hedge Trimmer

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Length	24"
Blade Speed	4,200 SPM
Fuel Type	Unleaded gas



# EN7350SH

# 30" 25.4 cc MM4® 4-Stroke Engine Single-Sided Hedge Trimmer

Engine Displacement (cc)	25.4 cc
Engine (HP)	1.1 HP
Blade Length	30"
Blade Speed	4,200 SPM
Fuel Type	Unleaded gas

# CORDED POWER EQUIPMENT





# UH6570 / UH5570

### 25" / 22" Electric Hedge Trimmer

Capacity (cutting diameter	) 1/2"
Capacity (cutting length)	UH6570 (25-1/2"), UH5570 (21-5/8")
Blade Speed	1,600 SPM
AMPS	4.8
Overall Length	UH6570 (44-3/4"), UH5570 (40-1/2")



# UC4051A

### 16" Electric Chain Saw

Chain Speed	2,900 FPM
Guide Bar Length	16"
Pitch	3/8"
Gauge	.050"
Oil Tank Capacity	6.8 oz.



# UC3551A

### 14" Electric Chain Saw

Chain Speed	2,900 FPM
Guide Bar Length	14"
Pitch	3/8"
Gauge	.050"
Oil Tank Capacity	6.8 oz.



# UB1103

### **Blower**

AMPS	6.8
Max. Air Volume	145 CFM
Max. Air Velocity	203 MPH
No Load Speed (variable speed)	0 - 16,000 RPM
Overall Length	18-7/8"

# 2-STROKE GAS CHAIN SAWS



EASY START

# **EA3200SR**

### 32 cc Chain Saw

Engine Displacement (cu.in./cc)	1.95 cu.in. (32 cc)
Power Rating	1.8 HP/1.3 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	13.5 oz.



TOOL-LESS

# EA3201SR 32 cc Chain Saw

Engine Displacement (cu.in./cc)	1.95 cu.in. (32 cc)
Power Rating	1.8 HP/1.3 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Canacity	13 5 07



## **EA3500SR**

### 35 cc Chain Saw

Engine Displacement (cu.in./cc)	2.14 cu.in. (35 cc)
Power Rating	2.3 HP/1.7 kW
Max. Engine Speed	13,100 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	13.5 oz.







Makita® 2-stroke power equipment offers fast starts, reduced weight, and compact designs so you can take control of shaping the landscape and the future. You have the power. How will you rule the outdoors?

### **2-STROKE FEATURES**

- Easy-start system delivers fast starts with less pull resistance
- Convenient touch & stop lever controls choke/ run/stop
- High power-to-weight ratio

EASY START

- Reduced weight and compact design offers better manueverability
- Proven experience using technology from the world's original gas chain saws
- Steel anti-vibration mount springs engineered to reduce vibration







TOOL-LESS

### EA3601FR

### 35 cc Chain Saw

Engine Displacement (cu.in./cc)	3.14 cu.in. (35.2 cc)
Power Rating	2.3 HP/1.7 kW
Max. Engine Speed	13,500 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	10.5 oz.





## EA4300FR

42 cc Chain Saw

Engine Displacement (cu.in./cc)	2.6 cu.in. (42 cc)
Power Rating	3 HP/2.2 kW
Max. Engine Speed	13,500 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	16.2 oz.



# MAGNESIUM" EA5000PR

### 50 cc Chain Saw

- 1 Pl 1 1 1 1 1 1 1	0.1 1 (=0.1
Engine Displacement (cu.in./cc)	3.1 cu.in. (50 cc)
Power Rating	3.9 HP/2.8 kW
Max. Engine Speed	13,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	15.9 oz.




# **EA5001PR**

### 50 cc Chain Saw

Engine Displacement (cu.in./cc)	3.1 cu.in. (50 cc)
Power Rating	3.9 HP/2.8 kW
Max. Engine Speed	13,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	15.9 oz.



Engine Displacement (cu.in./cc)	3.4 cu.in. (55.6 cc)
Power Rating	4.1 HP/3 kW
Max. Engine Speed	13,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	19.3 oz.









# EA6100PR 61 cc Chain Saw

Engine Displacement (cu.in./cc)	3.7 cu.in. (61 cc)
Power Rating	4.6 HP/3.4 kW
Max. Engine Speed	13,800 RPM
Fuel Mixture	50:1
Fuel Tank Canacity	27.07



# EA7300PR

### 73 cc Chain Saw

Engine Displacement (cu.in./cc)	4.4 cu.in. (72.6 cc)
Power Rating	5.4 HP/4.1 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	25.4 oz.



# **EA7301PR**

### 73 cc Chain Saw

Engine Displacement (cu.in./cc)	4.4 cu.in. (72.6 cc)
Power Rating	5.4 HP/4.1 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	25.4 oz.



# MAGNESIUM"

# EA7900PR 79 cc Chain Saw

Engine Displacement (cu.in./cc)	4.8 cu.in. (78.5 cc)
Power Rating	5.7 HP/4.3 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	25.4 oz.







# **EA7901PR**

# 79 cc Chain Saw

Engine Displacement (cu.in./cc)	4.8 cu.in. (78.5 cc)
Power Rating	5.7 HP/4.3 kW
Max. Engine Speed	12,800 RPM
Fuel Mixture	50:1
Fuel Tank Capacity	25.4 oz.









0000C

Part#

A-98326

### (28) 1" Insert Bits

(1) #1 Phillips, (7) #2 Phillips (2) #3 Phillips, (1) #1 Square (4) #2 Square, (2) #3 Square (1) #10 Torx®, (2) #15 Torx® (2) #20 Torx®, (2) #25 Torx® (1) #27 Torx®, (1) #30 Torx® (1) #8 Slotted, (1) #10 Slotted

### (4) 2" Power Bits

(2) #2 Phillips, (1) #2 Square, (1) #25 Torx®

### (1) Insert Bit Holders

(1) 2-3/8"

# (2) 1-3/4" Nut Drivers

(1) 1/4", (1) 5/16"

# IMPACTX™ BIT SETS

Description ImpactX™ 40 Pc. Bit Set





Part#

A-98332

### (29) 1" Insert Bits

(1) #1 Phillips, (8) #2 Phillips, (2) #3 Phillips, (1) #1 Square, (4) #2 Square, (2) #3 Square, (1) #10 Torx®, (1) #15 Torx®, (2) #20 Torx®, (2) #25 Torx®, (1) #27 Torx®, (1) #30 Torx®. (1) #8 Slotted, (1) #10 Slotted

## (5) 2" Power Bits

(3) #2 Phillips, (1) #2 Square, (1) #25 Torx®

### (2) 3-1/2" Power Bits

(1) #2 Phillips, (1) #2 Square

### (1) Insert Bit Holders

(1) 2-3/8"

## (3) 1-3/4" Nut Drivers

(1) 1/4", (1) 5/16", (1) 3/8"

# Part# Description ImpactX<sup>™</sup> 50 Pc. Bit Set A-98348

### Includes:

### (32) 1" Insert Bits

(2) #1 Phillips, (9) #2 Phillips, (2) #3 Phillips, (2) #1 Square, (4) #2 Square, (2) #3 Square, (1) #10 Torx®, (2) #15 Torx®, (2) #20 Torx®, (2) #25 Torx®, (1) #27 Torx®, (1) #30 Torx®, (1) #8 Slotted, (1) #10 Slotted

### (2) 3-1/2" Power Bits

(1) #2 Phillips, (1) #2 Square

### (10) 2" Power Bits

(3) #2 Phillips, (1) #3 Phillips, (1) #2 Square, (1) #3 Square. (1) #15 Torx®, (1) #20 Torx®, (1) #25 Torx®, (1) #10 Slotted

## (2) Insert Bit Holders

(1) 2-3/8", (1) 6"

### (1) 2" Socket Adapter

(1) 3/8"


### (3) 1-3/4" Nut Drivers

(1) 1/4", (1) 5/16", (1) 3/8"

Туре	Description	
Phillips Insert Bit	#1	
Insert Bit	#1	
A 0	#2	
	#2	
	#2	
	#2	
-	#0	


#1	1"	2	A-96453
#1	1"	50	A-98821
#2	1"	2	A-96469
#2	1"	25	A-99758
#2	1"	50	A-96475
#2	1"	200	A-97324
#2	1"	250	A-97302-10
#2 Reduced	1"	2	A-98837
#2 Reduced	1"	25	A-99764
#2 Reduced	1"	50	A-98859

Туре	Description	Length	Qty./Pkg.	Part#
Slotted	#8	1"	2	A-96621
Insert Bit	#10	1"	2	A-96637



ре	Description	Length	Qty./Pkg.	Part#
iare	#1	1"	2	A-96506
ert Bit	#1	1"	50	A-98887
	#2	1"	2	A-96512
ľ	#2	1"	25	A-99770
	#2	1"	50	A-96528
1	#2	1"	200	A-97346
	#2	1"	250	A-97330-10
	#3	1"	2	A-96534
	#3	1"	50	A-98893

IMPACTX™ INSERT BITS



Description Length



A-96615

Description	Length	Qty./Pkg.	Part#
#10	1"	2	A-96540
#10	1"	50	A-98902
#15	1"	2	A-96556
#15	1"	50	A-98918
#20	1"	2	A-96562
#20	1"	50	A-98924
#25	1"	2	A-96578
#25	1"	25	A-97352
#25	1"	50	A-98930
#27	1"	2	A-96584
#27	1"	50	A-98946
#30	1"	2	A-96590
#30	1"	50	A-98952
#40	1"	2	A-96609
#40	1"	50	A-98968





Torx® Insert Bit

				IMPACTX <sup>™</sup>	POWER BITS
Туре	Description	Length	Qty./Pkg.	Part#	Туре
Phillips	#1	2"	2	A-96643	Torx®
Power Bit	#1	2"	50	A-98974	Power Bit
	#2	2"	2	A-96659	
	#2	2"	5	A-96665	· 🔘 🖥
	#2	2"	15	A-99786	
- 1	#2	2"	50	A-98980	
•	#2	2"	100	A-97368	
	#2	2"	150	A-96671-10	
	#3	2"	2	A-96687	
	#3	2"	50	A-98996	

Туре	Description	Length	Qty./Pkg.	Part#
Square	#1	2"	2	A-96693
Power Bit	#1	2"	50	A-99007
	#2	2"	2	A-96702
	#2	2"	15	A-99792
_	#2	2"	50	A-99013
	#2	2"	100	A-97374
	#2	2"	150	A-97405-10
	#3	2"	2	A-96718
	#3	2"	50	Δ-99029

Туре		Description	Length	Qty./Pkg.	Part#
Slotted	V	#8	2"	2	A-96796
Power Bit		#10	2"	2	A-96805
					_

100	Description	Longai	Gry./ i Ng.	I di cii
Т	#10	2"	2	A-96724
	#10	2"	50	A-99035
I.	#15	2"	2	A-96730
	#15	2"	50	A-99041
Ŧ	#20	2"	2	A-96746
	#20	2"	50	A-99057
	#25	2"	2	A-96752
	#25	2"	50	A-99063
	#27	2"	2	A-96768
	#27	2"	50	A-99079
	#30	2"	2	A-96774
	#30	2"	50	A-99085
	#40	2"	2	A-96780
	#40	2"	50	A-99091

Qtv./Pka.

IMPACTX™ MAGNETIC NUT DRIVER SETS					
Туре	Description	Length	Qty./Pkg.	Part#	
	3 Pc. Magnetic Nut Driver Includes: 1 ea. 1/4", 5/16, 3/8"	1-3/4"	3	A-97265	
F	4 Pc. Magnetic Nut Driver Includes: 1 ea. 1/4", 5/16, 3/8", 7/16"	1-3/4"	4	A-97639	
	3 Pc. Magnetic Nut Driver Includes: 1 ea. 1/4", 5/16, 3/8"	2-9/16"	3	A-97689	
	3 Pc. Magnetic Nut Driver Includes: 1 ea. 1/4", 5/16, 3/8"	6"	3	A-97695	

	IMPACTX™	BIT HOLDERS	
Туре	Length	Qty./Pkg.	Part#
Two-Piece	2-3/8"	1	A-96920
Magnetic 4	2-3/8"	10	A-96936
Bit Holder	3"	10 A-96936 1 A-96942 10 A-99281	
3" 10	A-99281		
	6"	1	A-96958
_	6"	10	A-99297
	12"	1	A-96964
	12"	10	A-99306

уре	Length	Qty./Pkg.	Part#
e-Piece	2-3/8"	1	A-96970
agnetic	2-3/8"	10	A-96986
t Holder	3"	1	A-96992
	3"	10	A-99312
- X	6"	1	A-97003
	6"	10	A-99328
	12"	1	A-97019
	12"	10	A-99334

Туре	Length	Qty./Pkg.	Part#
Finder/	3"	1	A-97075
Driver™	3"	10	A-99340
	3"	25	A-97380
	4-3/4"	1	A-97081
	4-3/4"	10	A-99356
	4-3/4"	25	A-97396









# **IMPACT GOLD® SOCKET SETS**

Description

9-Pc. 3/8" Drive Metric Socket Set w/ 15° Tilt Socket Adapter 

R-49862

Part#

9-Pc. 3/8" Drive Impact Socket Set w/ 15° Tilt Socket Adapter



Usable Length

16"

Overall Length

21"

SDS-MAX CARBIDE DRILL BITS

Diameter

1/2"

1/2"

B-34833

Part#

B-61307

B-61313



	Diameter	Usable Length	Overall Length	Part#
SDS-MAX Dust Extraction Drill Bit	1/2"	15-3/4"	24"	B-63828
A N	9/16"	15-3/4"	24"	B-63834
🕱	5/8"	15-3/4"	24"	B-63840
	3/4"	15-3/4"	24"	B-63862
0 0	7/8"	15-3/4"	24"	B-63884
	1"	15-3/4"	24"	B-63890
B-63937	1-1/8"	15-3/4"	24"	B-63909
shown	1-3/8"	15-3/4"	24"	B-63937

Vacuum Attachment



- · Replacement vacuum attachment for Makita® SDS-MAX Dust Extraction Drill Bits
- Fits most common dust extractor vacuums
- For use with Makita® SDS-MAX dust extraction drill bits

SI	OS-MAX Bits 2-Cutter
SE	OS-MAX Bits 6-Cutter
•	6 cutting edges for maximum performance and rounder holes
•	6-cutter bit tip is engineered for drilling in reinforced

 Centering tip features a more aggressive design for faster hole starting

concrete



B-63943

	9/16"	8"	13"	B-61329
	9/16"	16"	21"	B-61335
er	5/8"	8"	13"	B-61341
•	5/8"	16"	21"	B-61357
als	5/8"	31"	36"	B-61363
X NO	11/16"	16"	21"	B-61379
X D	3/4"	8"	13"	B-61385
X AL	3/4"	16"	21"	B-61391
H H	3/4"	31"	36"	B-61400
X 13	13/16"	16"	21"	B-61416
n as	7/8"	8"	13"	B-61422
H H	7/8"	16"	21"	B-61438
d X Y	7/8"	31"	36"	B-61444
" Y 69	1"	8"	13"	B-61450
н ж	1"	16"	21"	B-61466
11 17	1"	31"	36"	B-61472
л п	1-1/8"	8"	13"	B-61488
A 11	1-1/8"	16"	21"	B-61494
	1-1/8"	31"	36"	B-61503
	1-1/4"	8"	13"	B-61519
	1-1/4"	16"	21"	B-61525
	1-1/4"	31"	36"	B-61531
0.00	1-3/8"	16"	21"	B-61547
	1-3/8"	31"	36"	B-61553
	1-1/2"	16"	21"	B-61569
	1-1/2"	31"	36"	B-61575

			SDS-MAX & S	PLINE CORE BITS	
	Description	Usable Length	Overall Length	Part #	
#	9" SDS-MAX Rotary Hammer Core Bit Shank Adapter	3"	4"	B-66612	*
	16-1/2" SDS-MAX Rotary Hammer Core Bit Shank Adapter	3"	4"	B-66628	
8	9" Spline Rotary Hammer Core Bit Shank Adapter"	3"	4"	B-66597	
X	16-1/2" Spline Rotary Hammer Core Bit Shank Adapter	3"	4"	B-66606	
- 11	1-3/4" Rotary Hammer Core Bit	3"	4"	B-66634	
11 11	2" Rotary Hammer Core Bit	3"	4"	B-66640	Owner
					The state of the s

RE BITS				
	Description	Usable Length	Overall Length	Part#
	2-5/8" Rotary Hammer Core Bit	3"	4"	B-66656
	3-1/8" Rotary Hammer Core Bit	3"	4"	B-66662
	4" Rotary Hammer Core Bit	3"	4"	B-66678
	5" Rotary Hammer Core Bit	3"	4"	B-66684
	6" Rotary Hammer Core Bit	3"	4"	B-66690
~~	7/16" x 4-1/2" Rotary Hammer Core Bit Centering Bit	3-1/2"	4-1/2"	B-66709
	Rotary Hammer Core Bit Drift Pin	-	-	B-66715





### SDS-PLUS Bits 2-Cutter

- · Self-centering carbide tip
- Centering tip features a more aggressive design for faster hole starting
- Central guiding action engineered for more accurate holes





1/4	10	12	D-00020
5/16"	4"	6"	B-60632
5/16"	10"	12"	B-60648
3/8"	4"	6"	B-60654
3/8"	10"	12"	B-60660
3/8"	16"	18"	B-60676
3/8"	22"	24"	B-60682
7/16"	10"	12"	B-60698
1/2"	4"	6"	B-60707
1/2"	10"	12"	B-60713
1/2"	22"	24"	B-60729
9/16"	4"	6"	B-60735
9/16"	10"	12"	B-60741
5/8"	6"	8"	B-60757
5/8"	10"	12"	B-60763
5/8"	22"	24"	B-60779
3/4"	6"	8"	B-60785
3/4"	10"	12"	B-60791
3/4"	22"	24"	B-60800
7/8"	10"	12"	B-60816
7/8"	16"	18"	B-60822
1"	8"	10"	B-60838
1"	16"	18"	B-60844
	10 Pa	cks	
5/32"	4"	6"	B-60850

Usable Length

4"

10"

4"

2"

Diameter

5/32"

3/16

3/16

3/16

7/32

1/4"

1/4"

Overall Length

6"

6"

12"

6"

4"

6"

1"	16"	18"	B-60844
	10 Pa	cks	
5/32"	4"	6"	B-60850
3/16"	2"	4"	B-60866
3/16"	4"	6"	B-60872
1/4"	2"	4"	B-60888
1/4"	4"	6"	B-60894
5/16"	4"	6"	B-60903
3/8"	4"	6"	B-60919
3/8"	10"	12"	B-60925
1/2"	4"	6"	B-60931
1/2"	10"	12"	B-60947

# 5 Pc. SDS-PLUS Bit Set. 2-Cutter



• Set Includes: (1) 3/16" x 6", (1) 1/4" x 6", (1) 5/16" x 6", (1) 3/8" x 6", (1) 1/2" x 6" SDS-PLUS bits

5/8"

- Self-centering carbide tip. Centering tip features a more aggressive design for faster hole starting
- Central guiding action engineered for more accurate holes

SDS-PLUS METAL/WOOD DRILL BITS					
Ď.	Diameter	Usable Length	Overall Length	Part#	
DS-PLUS Bits, 3-Cutter		Woo	od		
150 1 150 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1/8"	2-1/8"	3-7/8"	B-59106	
<b>X</b> 0	9/64"	2-1/4"	4"	B-59112	
	5/32"	2-1/2"	4-1/4"	B-59128	
000 01110 1 1 1	11/64"	2-5/8"	4-3/8"	B-59134	
SDS-PLUS shank allows drilling in metal without	3/16"	2-1/8"	4-5/8"	B-59140	
switching to a drill or using	13/64"	3-1/16"	4-3/4"	B-59156	
a special chuck adapter for operator convenience	7/32"	3-1/8"	4-7/8"	B-59162	
and productivity	15/64"	3-1/4"	5"	B-59178	
Specially designed shorter	1/4"	3-3/8"	5-3/16"	B-59184	
shank helps prevent damage		Met	al		
from accidental use in "Hammering with Rotation"	5/32"	2-5/16"	4-1/8"	B-59190	
mode on Rotary Hammers	3/16"	2-7/8"	4-5/8"	B-59209	
	1/4"	3-1/2"	5-1/8"	B-59215	
	5/16"	3-15/16"	5-3/4"	B-59221	
(122)	3/8"	4-1/2"	6-3/8"	B-59237	

### 5 Pc. Assorted SDS-PLUS



- Set Includes: Brad Point Wood Bits: 3/16" x 4-5/8", 1/4" x 5-1/8" and HSS-G Metal Bits: 1/8" x 3-7/8", 3/16" x 4-5/8", 1/4" x 5-3/16"
- SDS-PLUS shank allows drilling in metal or wood without switching to a drill or using a special chuck adapter for operator convenience and productivity
- Metal drilling bits are made of Grounded High-Speed Steel (HSS-G) for longer life and feature 135° split point geometry for reduced walking



- Allows use of 1/4" Hex Bits on SDS-PLUS Rotary Hammers
  - \_US B-59259

B-59243

# Ħ

SDS-PLUS CARBIDE DRILL BITS

Part#

B-60551

B-60567

B-60573

B-60589

B-60595


B-60604

B-60610

# SDS-PLUS Bits 3-Cutter

- 3-cutter bit tip is engineered for drilling in reinforced concrete
- Centering tip features a more aggressive design for faster hole starting
- Central guiding action engineered for more accurate holes



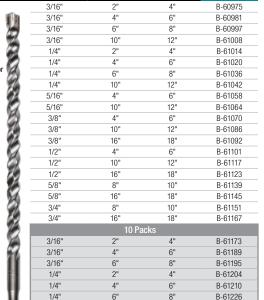

Usable Length

Diameter

1/4"

5/16"

3/8"

3/8"

1/2'

Diameter

Overall Length

12"

6"

6"

12"

6"

12"

0veral

B-61232

B-61248

B-61254

B-61260

B-61276

B-61282

B-61298

25/Pkg

Part#

### 5 Pc. SDS-PLUS Bit Set. 3-Cutter



• Set includes (1) 3/16" x 6", (1) 1/4" x 6", (1) 5/16" x 6", (1) 3/8" x 6", (1) 1/2" x 6" SDS-PLUS bits

10"

4"

4"

10"

4"

10"

- 3 cutting edges for maximum performance and rounder holes
- 3-cutter bit tip is engineered for drilling in reinforced concrete

Ħ	

B-60953

### 25-Pack

- Engineered for reduced vibration and noise
- Central guiding action for accurate holes
- Special impact grade carbide

		Longin	Longin	I di t ii
	5/32"	4"	6-1/4"	D-00810-25
7	3/16"	2"	4-1/2"	D-00826-25
X	3/16"	4"	6-1/4"	D-00832-25
<b>9</b>	3/16"	6"	8-1/4"	D-00848-25
	7/32"	4"	6-1/4"	D-00854-25
X	1/4"	2"	4-1/2"	D-00860-25
	1/4"	4"	6-1/4"	D-00876-25
1	1/4"	6"	8-1/4"	D-00882-25
	5/16"	4"	6-1/4"	D-00907-25
1	3/8"	4"	6-1/4"	D-00929-25
	3/8"	10"	12-1/4"	D-00935-25
	1/2"	4"	6-1/4"	D-00963-25
Ш	1/2"	10"	12-1/4"	D-00979-25
•	5/8"	6"	8"	D-01002-25

PERCUSSION CARBIDE DRILL BITS				
<b>R</b>	Diameter	Usable Length	Overall Length	Part #
Carbide-tipped for long life	3/16"	2-1/2"	4"	711120-A
Wide flutes for rapid dust removal	1/4"	2-1/2"	4"	711121-A
Re-sharpenable for extended life	1/4"	3-1/2"	6"	711122-A
- X	1/4"	11-1/2"	13"	711128-A
09	5/16"	3-1/2"	6"	711123-A
ZK.	3/8"	3-1/2"	6"	711124-A
<b>2</b>	3/8"	11-1/2"	13"	711129-A
	1/2"	3-1/2"	6"	711125-A
	1/2"	11-1/2"	13"	711130-A
	5/8"	3-1/2"	6"	711126-A
¥	5/8"	11-1/2"	13"	711131-A
	3/4"	3-1/2"	6"	711127-A
	3/4"	11-1/2"	13"	711132-A





# THE NEXT GENERATION OF ACCESSORIES

ENGINEERED TO DELIVER OPTIMAL & EFFICIENT CUTTING SOLUTIONS

### **CARBIDE-TIPPED SAW BLADES**

Diameter	Blade Type	No. Teeth	Model	Part#
3-3/8"	General Purpose	20T	01104111 011047711	A-95021
3-3/8"	General Purpose	24T	SH01W, SH01ZW	721005-A
4-3/8"	General Purpose	12T	40000111	A-90093
4-3/8"	General Purpose	24T	- 4200NH -	721107-6A
5-3/8"	General Purpose	16T	XSS03	A-94904
5-1/2"	General Purpose	18T	5005BA	792335-0
	For Use	e with Cordles	s Plunge Saws	
6-1/2"	Crosscutting	48T	SP6000J/J1, XPS01/2	B-07353*
6-1/2"	General Purpose	28T		A-99960
6-1/2"	Corian®	48T	XPS01PTJ, XPS02ZU	A-98809
6-1/2"	Crosscutting	48T		A-99932
6-1/2"	Aluminum	56T		A-99976
6-1/2"	Crosscutting	56T	XPS01PTJ.	B-57342
6-1/2"	Crosscutting	60T	XPS02ZU	A-99982
6-1/2"	Crosscutting	60T		A-99998
6-1/2"	General Purpose	16T		T-01395
6-1/2"	General Purpose	24T	_	A-85092
6-1/2"	Framing	24T		T-01404
6-1/2"	Framing	25T	<ul><li>XSH03, XSS01</li></ul>	B-62963
6-1/2"	Crosscutting	40T		A-90314
6-1/2"	General Purpose	40T	_	T-01410
7-1/4"	Framing	24T		B-61656 / B-61656-10 (10/pk
7-1/4"	General Contractor	16T	XSR01, XSH06, 5007F,	A-90009-B-10 (10/pk)
7-1/4"	General Contractor	24T	5007FA, 5007MG,	D-45989-10 (10/pk)
7-1/4"	Framing	24T	<ul> <li>5007MGA, 5377MG, -</li> <li>HS7600, 5477 NB, _</li> </ul>	A-94839-10 (10/pk)
7-1/4"	Ultra-Coated Framing	24T	XSH01, XSR01,	A-94530-10 (10/pk)
7-1/4"	Fine Crosscutting	40T	5007NK	721251-A
8-1/4"	Framing	24T	50001101	D-21521
8-1/4"	Fine Crosscutting	40T	- 5008MGA -	792377-A
10-1/4"	Framing	24T	5104, HS0600	A-94910
16-5/16"	Beam & Timber	32T	5 400114	A-90956
16-5/16"	Beam & Timber	60T	- 5402NA -	792118-8

\*Can be used with both corded and cordless models

### FERROUS METAL CUTTING BLADES

Trakita INI	
ATA	
X	
DEM	

	Diameter	Blade Type	No. Teeth	Model	Part#
	5-3/8"	Ferrous Metal	30T	XSC01	A-95037
	5-3/8"	Ferrous Metal - Thin Gauge	50T	X3001	A-94524
	5-7/8"	Ferrous Metal	32T	XSC02	A-96095
ŀ	5-7/8"	Ferrous Metal - Thin Gauge	52T	X5002	A-96104
F	7-1/4"	Ferrous Metal	38T		A-93821
	7-1/4"	Ferrous Metal	48T	4131	A-93837
k.	7-1/4"	Ferrous Metal - Thin Gauge	70T		A-93843
г	12"	Ferrous Metal	60T		A-90532
r	12"	Ferrous Metal	60T	LC1230	A-90722**
	12"	Ferrous Metal - Thin Gauge	78T		A-90875 **Quiet Cutting

A PROPERTY OF	
makita	

Diameter	Blade Type	No. Teeth	Model	Part#
5-3/8"	Aluminum	50T	XSC01	A-95940
5-7/8"	Aluminum	52T	XSC02	A-96126

## STAINLESS STEEL CUTTING BLADES

- Japanese ultra-thin kerf (.043") and special-grade alloy design provides smoother cuts with less drag on the motor and minimal material loss
- Special Triple Chip Grind (TCG) design provides cleaner cuts

Diameter	Blade Type	No. Teeth	Model	Part#
5-3/8"	Stainless Steel - Thin Gauge	56T	XSC01	A-95794
5-7/8"	Stainless Steel - Thin Gauge	60T	XSC02	A-96110
7-1/4"	Stainless Steel - Thin Gauge	64T	4131	A-95875
12"	Stainless Steel	76T	LC1230	A-91039

### MAX EFFICIENCY MITER SAW BLADES Diameter Blade Type No. Teeth Model Part # Ultra Plus Premium Ripping/Crosscutting 10" 45T B-62103 Ultra Plus Premium Smooth Crosscutting LS1018, LS101L, LS1040 10" 60T B-66961 Ultra Plus Premium 10" B-66977 80T Fine Finish Crosscutting Ultra Plus Premium Ripping/Crosscutting 60T B-66983 Ultra Plus Premium LS1216L, LS1219L, 12" B-66999 80T Smooth Crosscutting LS1221 Ultra Plus Premium Fine Finish Crosscutting B-67000 100T

Thakita	PREMIUM ULTR	A-COATED I	MITER SAW BLADES	
Diameter	Blade Type	No. Teeth	Model	Part#
7-1/2"	Crosscutting	40	XSL01	A-90912
7-1/2"	Crosscutting	40	— XSL01, XSC02 —	A-90629
7-1/2"	Crosscutting	72	A3LU1, A3GUZ	A-94487
8-1/2"	Crosscutting	48	LS0815F	A-95934
10"	Premium Crosscutting (Ultra-Coated)	40		A-94758
10"	Premium Smooth Crosscutting (Ultra-Coated)	60	LS1018, LS101L, LS1040	A-94764
10"	Premium Fine Crosscutting (Ultra-Coated)	80		A-94770
12"	Premium Crosscutting (Ultra-Coated	40		A-94786
12"	Premium Crosscutting (Ultra-Coated	60		A-94792
12"	Premium Smooth Crosscutting (Ultra-Coated)	80	LS1216L, LS1219L, LS1221	A-94801
12"	Premium Ultra-Fine Crosscutting (Ultra-Coated)	100		A-94817
12"	Premium Crosscutting (Ultra-Coated)	70		A-94443
14"	Crosscutting	80	LS1440	792297-7A

### **ULTRA-THIN CUT-OFF WHEELS**


- . 032" thick for faster cutting and reduced material wastel
- · For making cuts in metal and stainless steel pipes, sheet, and channel

Diameter	Thickness	Arbor	Model	1/Pkg. Part#	25/Pkg. Part#
4"	.032"	5/8"	GA4030	B-46143	B-46143-25
4-1/2"	.032"	7/8"	9557NB/PB, 9564CV/PC/P, GA4530, GA4534, XAG01, XAG03, XAG06	B-46159	B-46159-25
5"	.032"	7/8"	9005B/BZ, 9558PB, 9565CV/PC, GA5010Z, GA5020/Y	B-46165	B-46165-25

### **INOX GRINDING WHEELS**

- · Aggressive composition for faster material removal
- Innovative design for reduced noise
- Reduced vibration for superior user experience

Diameter	Thickness	Arbor	Model	1/Pkg. Part#	5/Pkg. Part#	25/Pkg. Part#
4-1/2"	1/4"	7/8"	9557NB/PB, 9564CV/PC/P, GA4530, GA4534, XAG01, XAG03, XAG06	A-95956	A-95956-5	A-95956-25
5"	1/4"	7/8"	9005B/BZ, 9558PB, 9565CV/PC, GA5010Z, GA5020/Y	A-95962	A-95962-5	A-95962-25
6"	1/4"	7/8"	9566CV/PC, GA6010Z, GA6020	A-95978	A-95978-5	A-95978-25
4-1/2"	1/4"	5/8"-11	9557NB/PB, 9564CV/PC/P, GA4530, GA4534, XAG01, XAG03, XAG06	A-95984	A-95984-5	A-95984-25
5"	1/4"	5/8"-11	9005B/BZ, 9558PB, 9565CV/PC, GA5010Z, GA5020/Y	A-95990	A-95990-5	A-95990-25
6"	1/4"	5/8"-11	9566CV/PC, GA6010Z, GA6020	A-96001	A-96001-5	A-96001-25






Mr.	WIRE BF	RUSHES			
	Description	Diameter	Arbor	Max. RPM	Part#
Crimped Cup		3"	M10 x 1.25	13,500	A-98382
<u> </u>	Durable carbon steel wire construction     Removes rust, scale	3"	5/8" - 11	12,500	A-98398
	and weld splatter  For angle grinders	4"	5/8" - 11	8,500	A-98407
		6"	5/8" - 11	6,600	A-98413
Crimped Wheel Brush	Removes rust, scale and weld splatter     For angle grinders	4"	5/8" - 11	12,500	A-98376
Standard Iwist Wheel	Ideal for deburring, edge blending and finishing	4"	M10 x 1.25	13,500	A-98653
	For angle grinders	4"	5/8"-11	12,500	A-98669
Bevel Brush	Ideal for grooves, curves, and corners	3-3/8"	M10 x 1.25	13,500	A-98631
	For angle grinders	3-3/8"	5/8"-11	12,500	A-98647
Crimped End Brush for Drill Straight Shank)	Narrow design for hard to reach areas	1"	1/4"	4,500	B-63030
(notted End Brush for Drill Straight Shank)	Narrow design for hard to reach areas	1/4"	1/4"	4,500	B-63052
Crimped Wire Wheel for Impact Oriver (Hex Shank)	Removes rust, scale and weld splatter	3"	1/4"	4,500	B-63074
Nire Cup Brush for Impact Driver (Hex Shank)	Removes rust, scale and weld splatter	3"	1/4"	4,500	B-63080
Knot Cup		2-3/4"	5/8"-11	12,500	A-98429
	0	2-3/4"	5/8"-11	12,500	A-98435
6	Rugged knot construction     Ideal for tight	2-3/4"	M10 x 1.25	13,500	A-98441
della	operations, corners, and angle welds  • For use with angle grinders	2-3/4"	M10 x 1.25	13,500	A-98457
	giilideis	4"	5/8"-11	8,500	A-98463
		6"	5/8"-11	6,600	A-98479
• Allows cup or wheel with 5/8"-11 arbors					

# HOLLOW SOCKETS FASTENING Socke

Hollow socket accelerates fastening over extra long bolts and all thread, NO MORE HAND-THREADING



Socket Size	Length	Part#
9/16"	3"	B-43290
	6"	B-43309
	12"	B-43315
	18"	B-43321
	24"	B-43337
3/4"	3"	B-43343
	6"	B-43359
	12"	B-43365
O	18"	B-43371
_	24"	B-43387





# **Self Feed Bits**

- Used by plumbers, electricians and other tradesmen for boring holes for pipe and conduit in wood
- Outlining spurs accurately define hole diameter
- Threaded screw point pulls the bit into the work providing a fast, easy to use self feeding action
- 7/16" hex heavy-duty shank



Diameter	For Pipe Diameter	Part #
1"		D-29935
1-1/8"	1/2"	D-29957
1-1/4"	3/4"	D-29963
1-3/8"		D-29979
1-1/2"	1"	D-29985
1-3/4"	1-1/4"	D-29991
2"		D-30003
2-1/8"	1-1/2"	D-30019
2-1/4"		D-30025
2-9/16"	2"	D-30031
3"		D-30047

**DRILL BITS** 

Description	Part#
Double-ended screw point for bit 1" to 3"	D-30156

# **Heavy Duty Spade Bits**

- Spurs cut cleaner, more accurate holes through hardwood
- Chisel edge design is angled aggressively to dig into wood



Set Description Part #
6-Pc. Set Includes: 3/8", 1/2", 5/8", 3/4", 7/8", 1"
714171-A

6-1/8" Length Part # 16" Length Part # Diameter 1/4" 714154-A 5/16" 714155-A 3/8" 714156-A 714147-A 7/16' 714157-A 1/2" 714158-A 714148-A 714159-A 9/16' 5/8" 714160-A 714150-A 11/16 714161-A 3/4" 714162-A 714151-A 13/16' 714163-A 714164-A 714152-A 7/8" 15/16' 714165-A 714166-A 714153-A 1-1/8' 714167-A 1-1/4" 714168-A 1-3/8" 714169-A 1-1/2' 714170-A

### **Ship Augers**

- Features quick release hex shank for fast insertion or removal
- Cutting edge quickly cuts through wood with maximum efficiency
- Thick edge easily cuts through nails



Diameter	Length	Shank	Part#
3/8"	6"	E (401111-11	D-35673
1/2"	6	5/16" Hex	D-35695
5/8"			D-35710
11/16"			D-35726
3/4"			D-35732
13/16"			D-35748
7/8"			D-35754
15/16"	6"	7/16" Hex	D-35760
1"	U	7/10 nex	D-35776
1-1/16"	- 18"		D-35782
1-1/8"			D-35798
1-1/4"			D-35807
1-3/8"			D-35813
1-1/2"			D-35829
7/16"		5/16" Hex	D-35841
1/2"	10	3/10 11cx	D-35857
9/16"			D-35863
5/8"			D-35879
11/16"			D-35885
3/4"			D-35891
13/16"			D-35900
7/8"			D-35916
15/16"	18"	7/16" Hex	D-35922
1"			D-35938
1-1/16"			D-35944
1-1/8"			D-35950
1-1/4"			D-35966
1-3/8"			D-35972
1-1/2"			D-35988

### **Ship Auger Extensions**

- Set screw design ensures a tight connection in the most demanding of applications
- Attaches to hex shank drill bits to allow deeper drilling in wood
- High strength steel construction for long life

Length	Shank	Part#
5-1/2"		D-35645
12"	7/16" Hex	D-35651
18"	_	D-35639

# HOLE SAWS

### **Bi-Metal Hole Saws**

Use below with Arbor #: 714060-B, 714061-A or 714062-B which have 1/2" - 20 thread

Description	Pipe Entrance Size	Pipe Tap Size	Mild Steel RPM	Box Part #
5/8"			530	714002-A
3/4"			460	714004-A
7/8"	1/2"	3/4"	390	714006-A
15/16"			370	714007-A
1"			350	714008-A
1-1/16"			325	714009-A
1-1/8"	3/4"	1"	300	714010-A
1-3/16"			285	714011-A

Use below with Arbor #: 714063-A or 714065-A which have 5/8" - 18 thread

Pipe Entrance Size	Pipe Tap Size	Mild Steel RPM	Box Part #
		275	714012-A
		260	714013-A
1"		250	714014-A
	1-1/4"	230	714016-A
		210	714018-A
1-1/4"	1-1/2"	195	714020-A
		180	714022-A
1-1/2"		170	714023-A
		165	714024-A
		160	714025-A
	2"	150	714026-A
		140	714028-A
	1" 1-1/4"	1" 1-1/4" 1-1/2" 1-1/2"	Size         Size         RPM           275         260           1"         250           1-1/4"         230           210         210           1-1/4"         1-1/2"         195           180         1-1/2"         170           165         160         2"           2"         150

Use below with Arbor #: 714065-A which has 5/8" - 18 thread

Description	Pipe Entrance Size	Pipe Tap Size	Mild Steel RPM	Box Part #
2-1/2"	2"		135	714029-A
2-5/8"		2-1/2"	130	714031-A
2-3/4"			125	714032-A
2-7/8"			120	714033-A
3"	2-1/2"		115	714034-A
3-1/8"			110	714035-A
3-1/4"		3"	105	714036-A
3-1/2"			95	714038-A
3-5/8"	3"		95	714039-A
3-3/4"		3-1/2"	90	714040-A
4"			85	714042-A
4-1/8"	3-1/2"		85	714043-A
4-1/4"			80	714044-A
4-1/2"	4"		75	714046-A
4-3/4"		4-1/2"	70	714047-A
5"			65	714048-A
6"			55	714050-A

### **Arbors with Pilot Drill**



Thread Size	Shank	Box Part#
1/2" – 20	1/4" Round	714060-A
1/2" – 20	3/8" Hex	714061-A
1/2" – 20	7/16" Hex	714062-A
5/8" – 18	3/8" Hex	714063-A
5/8" – 18	7/16" Hex	714065-A

Description	Part#
12" Extension for 7/16" Shank Arbors	714067-A



### **HOLE SAWS**

Description Part # Converts 1/4" hex impact driver into 3/8" keyless chuck 763198-1

# High Speed Steel Step Drill Bits


**Keyless Chuck Attachment** 



Increments	Shank	Part#	
1/8", 5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 13/32", 7/16", 15/32", 1/2"	1/4"	711492-A	
1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4"	1/4"	711493-A	
1/4", 7/8", 1-1/8"	1/4"	711494-A	
1/4", 1/2"	1/4"	711495-A	
1/4", 7/8"	1/4"	711496-A	
9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1"	1/4"	711497-A	

### **INDUSTRIAL CARBIDE-TIPPED HOLE SAWS**

- Lasts 15X longer and drills 2.6x faster than Bi-M hole saws
- Specially designed carbide tips for cutting clean holes
- Max. cutting depth of 1/8" with 2-1/2" overall length



Diameter	Part#	Center Bits Type C Part #
5/8"	714070-A	
3/4"	714071-A	
7/8"	714073-A	
1"	714074-A	
1-1/8"	714075-A	
1-1/4"	714077-A	714086-A
1-3/8"	714078-A	7 14000-A
1-1/2"	714079-A	
1-3/4"	714080-A	
2"	714081-A	
2-1/8"	714092-A	
2-1/4"	714082-A	
2-1/2"	714083-A	
3"	714085-A	

# LOW-VIBRATION DIAMOND CUP WHEELS

### **Low-Vibration**

Low-vibration design engineered to keep the wheel planted firmly on the surface for more efficient material removal

Diameter	Rim	Segments	Arbor	Max. RPM	Model	Part #	
4-1/2"	Double Row	10	5/8" - 11	13.400	9564CV/PC/P,	A-96198	
4-1/2	Turbo	8	3/0 - 11	13,400	9565CV/PC	A-96403	
5"	Turbo	30	5/8" - 11	12,500	9005B/BZ, 9558PB, 9565CV/PC, GA5010Z, GA5020/Y, XAG04, XAG11	A-98871	
	Single Row	12				A-96207	
7"	Double Row	16	E/011 44	E/01 44	8.500	GA7011C,	A-96213
	Turbo	12	5/8" - 11	0,500	00 GA7040S, GA9040S	A-96419	
		24				A-96425	

### PREMIUM HAMMER CART

# T-03224

- Large, rugged 10" semi-pneumatic wheels roll smoothly over rough job site terrain
- Stair climber rails for convenient lifting up stairs, curbs, truck beds and other elevated surfaces
- Adjustable strap keeps hammer securely fastened to the cart during transportation
- · Convenient cord wrap keeps cord cleanly tucked away





		TR	IMMER HE	ADS		
	Description	Arbor Size	Gauge & Style	Line Capacity	Fits Models	Part#
	10mm LH Comfort Trim Bump & Feed Head	M10 x 1.25 LH	.095" Premium Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	EM2650LH, EM2652LHN, EM2650UH, XRU09, EM400MP, EM405MP, XUX01ZM5	T-01753 <i>A</i>
	8mm LH Comfort Trim Bump & Feed Head	M8 x 1.25 LH	.095" Premium Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU11, XRU04	T-02917
	8mm RH Comfort Trim Bump & Feed Head	M8 x 1.25 RH	.095" Premium Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU08, XRU13, ER400MP	T-03187
	High Capacity Bump & Feed Head	M10 x 1.25 LH	.095" Standard Round	30 ft. of .080" 20 ft. of .095" 20 ft. of .105" 10 ft. of .130"		B-05119*
	Bump & Feed Trimmer Head	M10 x 1.25 LH	.095" Standard Round	30 ft. of .080" 20 ft. of .095" 20 ft. of .105" 10 ft. of .130"	EM2650LH, EM2652LHN, EM2650UH, EM400MP, EM405MP	713301-C
	Manual Feed Trimmer Head	M10 x 1.25 LH	.095" Standard Round	30 ft. of .080" 20 ft. of .095" 20 ft. of .105" 10 ft. of .130"		713300-C
	Fixed Line Trimmer Head	Universal	.095" Standard Round	5 ft. of .105" 5 ft. of .110" 4 ft. of .130"	EM2650LH, EM2652LHN, EM2650UH, XRU09, EM400MP, EM405MP, XUX01ZM5	B-02951
	Bump & Auto Feed Trimmer Head	LH Universal	.095" Standard Round	17 ft. of .080" 12 ft. of .095" 10 ft. of .105" 9 ft. of .110"	EM2650LH, EM2652LHN, EM2650UH, XRU09, XRU11, XRU04, EM400MP, EM405MP, XUX01ZM5	B-60109
	Bump & Auto Feed Trimmer Head	RH Universal	.095" Standard Round	20 ft. of .080" 16 ft. of .095" 14 ft. of .105" 13 ft. of .110"	XRU08, XRU13, ER400MP	B-60121
	Bump & Feed Trimmer Head	M8 x 1.25 RH	.080" Standard Twisted Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU08, XRU13,	197297-
	Bump & Feed Trimmer Head	M8 x 1.25 RH	.080" Standard Twisted Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	ER400MP	198972-
	Bump & Feed Trimmer Head	M8 x 1.25 LH	.080" Standard Twisted Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU11, XRU04	198386-
	Bump & Feed Trimmer Head	M10 x 1.25 LH	.080" Standard Twisted Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	EM2650LH, EM2652LHN, EM2650UH,	197296-
	Bump & Feed Trimmer Head	M10 x 1.25 LH	.080" Standard Twisted Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU09, EM400MP, EM405MP, XUX01ZM5	198892-
0	Bump & Feed Trimmer Head	M8 x 1.25 RH	.095" Standard Round	20 ft. of .080" 18 ft. of .095" 16 ft. of .105" 13 ft. of .110"	XRU08, XRU13, ER400MP	122980-
	Single Cutter Trimmer Head	M8 x 1.25 RH	Serrated Single Cutter	-	Direc	198847-
	Bump & Feed Trimmer Head	M8 x 1.25 RH	.065" Standard Round	26 ft. of .065"	- RU03	198853-0

*B-02951 Fixed Line Trimmer Head requires Hex Lock Nut M10-17 (264088-	6)
**Recommended for use with gas power head on EM400MP and EM405N	ΛP



**	TRIMMER LIN	IE ACCESSORIE	S	
	Gauge & Style	Weight	Quantity	Part#
	.080" Round	1 lb.	1/Pk	T-03361
	.080" Round	1 lb.	12/pk	T-03707
	.080" Round	3 lbs.	1/Pk	T-03377
	.080" Round	3 lbs.	4/pk	T-03713
	.095" Round	1 lbs.	1/Pk	T-03408
	.095" Round	1 lbs.	12/pk	T-03729
	.095" Round	3 lbs.	1/pk	T-03414
	.095" Round	3 lbs.	4/pk	T-03735
	.095" Round	5 lbs.	1/pk	T-03420
	.095" Round	5 lbs.	6/pk	T-03741
	.105" Round	1 lbs.	1/pk	T-03442
	.105" Round	1 lbs.	12/pk	T-03757
	.105" Round	3 lbs.	1/pk	T-03458
	.105" Round	3 lbs.	4/pk	T-03763
	.105" Round	5 lbs.	1/pk	T-03464
	.105" Round	5 lbs.	6/pk	T-03779


# TRIMMER ACCESSORIES

# B-14118

9" Star Blade, 4T · Efficient cutting of of grasses, shrubs, underwood and thicket

Fits models EM2650LH<sup>†</sup>, EM2652LHN\*, EM2650UH





# 122906-3

**Brush Cutter Harness** 

- Padded shoulder straps distribute weight evenly for improved comfort
   Fits models EM2650LH, EM2652LHN, EM2650UH, EX2650LH, XUX01Z, XRU09Z, XRU11Z



# 196500-7 Brush Cutter Conversion Kit

- Conveniently converts Makita string trimmer into a blade capable grass trimmer
   Fits models EM2650LH, EM2652LHN



# 197680-2

Service Kit

- Maintenance and service components to tune up engine for optimum performance and durability
- ourability

  Fits models EM2650LH, EM2650LH, EM2650UH, EM2652LHN, EE2650H, EN4950H, EN4951SH, EN5550SH, EN5950SH, EN7350SH



# **ACCESSORIES**

Trak	ita.		HAIN SAW	GUIDE BAF	RS	
Description	Length	Pitch	Gauge	Mount #	Model	Part #
w/ Tip Guard	4-1/2"	1/4"	.050"	-	XUC01	158476-6
Low Profile	10"	3/8"	.043"	A041	XCU02, XCU03, XCU04, XCU06	161846-0
Low Profile	10"	3/8"	.050"	A218	EY2650H25H	165695-7
Narrow Kerf	12"	3/8"	.043"	A041	XCU02, XCU03, XCU04, XCU06, UC3551A, UC4051A,	165245-8
w/ Tip Guard	12"	3/8"	.050"	A041	EA3200SR, EA3201SR, EA5000SR, EA3601FR, EA4300FR	163150-3
Narrow Kerf	14"	3/8"	.043"	A041		165246-6
Low Profile	14"	3/8"	.050"	A041	XCU03, XCU04, XCU06, UC3551A, UC4051A,	165201-8
Narrow Kerf	16"	3/8"	.043"	A041	EA3200SR, EA3201SR, EA5000SR, EA3601FR, EA4300FR	165247-4
Low Profile	16"	3/8"	.050"	A041	-	442-040-66
Mid-Range	18"	.325"	.050"	K095		445-045-64
Mid-Range	18"	3/8"	.050"	K095	EA5000PR, EA5001PR, EA5600FR, EA6100PR	443-045-66
Standard	20"	.325"	.050"	K095	-	445-050-64
Standard	20"	3/8"	.050"	D009	DCS6421R, EA7300PR, EA7301PR, EA7900PR, EA7901PR	445-050-665
Standard	20"	3/8"	.050"	K095	EA5000PR, EA5001PR,	443-053-66
Replaceable Tip	20"	3/8"	.050"	K095	EA5600FR, EA6100PR	713200-A
Replaceable Tip	20"	3/8"	.050"	D009		713204-A
Replaceable Bar Nose	24"	3/8"	.050"	D009	DCS6421R, EA7300PR,	713205-A
Replceable Tip	28"	3/8"	.050"	D009	- EA7301PR, EA7900PR, EA7901PR	713206-A
Replceable Tip	32"	3/8"	.050"	D009	-	713207-A

CHAIN SAW CHAINS								
Description		Pitch	Gauge	Drive Links	Chain Type	File Size	Fits Guide Bar Model	Part #
Standard Kickback Chain*	4-1/2"	1/4"	.050"	42	25AP	5/32"	158476-6	791284-8
Low Kickback Chain*	10"	3/8"	.043"	40	90PX	4.5mm	161846-0	199075-5
Low Kickback Chain*	10"	3/8"	.050"	39	91VXL	5/32"	165695-7	196142-7
Low Kickback Chain*	12"	3/8"	.043"	46	90PX	4.5 mm	165245-8	531-291-646
Low Kickback Chain*	12"	3/8"	.050"	45	91PX	5/32"	163150-3	196519-6
Low Kickback Chain*	14"	3/8"	.043"	52	90PX	4.5 mm	165246-6	196741-5
Low Kickback Chain*	14"	3/8"	.050"	52	91PX	5/32"	165201-8	196207-5
Low Kickback Chain*	16"	3/8"	.043"	56	90PX	4.5mm	165247-4	196742-3
Low Kickback Chain*	16"	3/8"	.050"	56	91PX	5/32"	442-040-661	196208-3
Low Kickback Chain*	18"	.325"	.050"	72	20BP	3/16"	445-045-641	513-486-672
Low Kickback Chain*	18"	3/8"	.050"	64	72V	7/32"	443-045-661	523-102-064
Low Kickback Chain*	20"	.325"	.050"	78	20BP	3/16"	445-050-641	513-486-078
Standard Kickback Chain*	20"	3/8"	.050"	72	72LG	7/32"	445-050-665, 443-053-661.	523-100-072
Low Kickback Chain*	20"	3/8"	.050"	72	72V	7/32"	713200-A,	523-102-072A
Standard Kickback Chain*	24"	3/8"	.050"	84	72LG	7/32"	713205-A	713105-A
Standard Kickback Chain*	28"	3/8"	.050"	92	72LG	7/32"	713206-A	713106-A
Standard Kickback Chain*	32"	3/8"	.050"	105	72LG	7/32"	713207-A	713107-A

\*Per ANSI B175.1 2012

# **Chain Protectors**

- Protects bar and chain when transporting chain saw
- Helps prevent accidental cuts and scrapes during transport
- · Quick and simple installation



CHAIN

SAW ACCESSORIES						
Size	Fits Models	Part#				
5"	XCU01Z	416311-7				
10"	EY2650H25H, XCU06	452093-7				
14" - 16"	XCU03, EA3200S, EA3201S, EA3500S, EA3601F, EA4300F	419242-9				
18"	DCS5121, EA5000P, EA6100P	419560-5				
20"	DCS5121, EA5000P, EA6100P, DCS6421	952-020-650				
24"	EA7300P, EA7301P, EA7900P, EA7900P	952-020-660				
32"	EA7300P, EA7301P, EA7900P, EA7900P	952-030-180				

# **Bar & Chain Oil**

- Reduces bar, chain and sprocket wear for longer bar and chain life
- Reduces heat and friction for efficient cutting







### Description Fits Models 181119-A (Summer Mix) 1 Quart Bar and Chain Oil 1 Quart Bar and Chain Oil 181119-A-12 (12/Pk) 1 Gallon Bar and Chain Oil All Makita® Chain Saws 181116-A (Summer Mix) 1 Gallon Bar and Chain Oil 181116-A-4 (Summer Mix 4/Pk) T-03159-4 (Winter Mix 4/Pk) 1 Gallon Bar and Chain Oil

# **SAFETY EQUIPMENT**

# 986-200-002

Combo Safety Helmet

Adjustable design easily adjusts to operator for improved comfort
 Face protector allows good view of the working area

Ear protectors are easily adjustable



### B-70777 Chain Saw Case

· Low-profile, rounded carrying handle for user comfort

Engineered for efficient transport of chain saw to and from the job site

Durable plastic molding for increased protection



- Chain Saw Chaps
   Durable design with less weight for improved operator comfort
- Easy to put on and adjust to fit operator
- Intended to, under limited conditions; in reducing the severity of injury from a gasoline running chain saw that contacts the operator's leg



Size	Part#
32"	986-200-006
36"	986-200-007
38"	841008-A
40"	986-200-008





THE NEXT GENERATION OF ACCESSORIES ENGINEERED TO DELIVER OPTIMAL & EFFICIENT CORDED & CORDLESS CUTTING SOLUTIONS



**UP TO 70% FASTER CUTTING & 70% MORE CUTS PER CHARGE\*** 

\***7-1/4" 24T FRAMING BLADE** (B-61656)





10" 80T CROSSCUTTING BLADE (B-66977)



12" 100T Crosscutting blade (B-67000)

